

PRODUCT CATALOG



The Benchmark of Quality

R Ranger® **AUTOSTACKER™** **JACKPAK™**

GRANDPRIX™ **COOL BOSS™** CoolCharge



Table of Contents

4-5	2-Post Medium-Duty Clearfloor Lifts
6	2-Post Medium-Heavy Floor Plate Lifts
8-9	2-Post Heavy-Duty Clearfloor Lifts
12-13	2-Post & 4-Post Home Garage Lifts
14	4-Post Light-Duty
16-17	4-Post Medium-Duty
18	4-Post Options / Accessories
20-21	4-Post Heavy-Duty Lifts
22	Alignment Lifts
24	Rolling Bridge Jacks
26-27	Quatra Scissors
29	Portable Column Lift
30-31	Low-Rise & Mid-Rise Lifts
32-33	Parking & Storage Lifts
36-37	Multi-Platform Parking Lift
38	Image Gallery
40-41	Pipe Benders
42-43	Air Compressors
44	Power Units
46-47	Tire Changers
48-49	Wheel Balancers
50-51	Brake Lathes / Wheel Aligner
52-53	Floor Jacks / Transmission Jacks
54	Jack Stands
55	Motorcycle Lifts
56	Carts & Dollies / Shop Presses
57	Work Benches / Hose Reel
58	Oil Drains / Oil Filter Crushers
59	Spray Wash Cabinets
60	Manual Wheel Service / Rolling Work Seat / Portable Air Cooler
61	Engine Support / Shop Crane / Inflation Cage / A/C Machine
62-63	Manufacturing Superiority



GENERAL DISCLAIMER

BENDPAK warrants to the original purchaser only that all products shown in this catalog conform to BENDPAK published specifications and are free from defects in material or workmanship. In no event will BENDPAK be liable to you or to anyone else for any decision made or action taken by you or anyone else in reliance on information obtained from this catalog. BENDPAK has exclusive title and ownership rights, including all intellectual property right, throughout the world in all material and content contained on these pages. Materials, design, specifications, images and other content within this catalog are subject to change. BENDPAK does not take responsibility for improper use or any results thereof. BENDPAK products are provided and sold as is without any express or implied warranties including warranties of merchantability or fitness for particular purpose. In no event will BENDPAK be liable for any special, incidental, or consequential damages based on breach of warranty, breach of contract, negligence, strict tort, or any other legal theory. Damages that BENDPAK will not be responsible for include, but are not limited to: loss of profits; loss of savings or revenue; loss of use of the product or any associated equipment; cost of capital; cost of any substitute equipment, facilities, or services; downtime; the claims of third parties, including customers; and injury to property. This limitation does not apply to damages caused by breach of the warranty of title and against infringements or to claims for personal injury. Unless modified in a writing signed by both parties, it is understood that BENDPAK published warranties are to be the complete and exclusive agreement between the parties. For complete and full warranty details contact BENDPAK at 1-805-933-9970 or visit www.bendpak.com.

Equipment models shown in this catalog may be available in different voltages upon request.



Medium-Duty Clearfloor

SERIES FEATURES:

- Wide or narrow configuration
- Exclusive "Tru-Metric" arms
- Single-point safety release
- Dual "Direct-Drive" cylinders
- Electric / hydraulic power
- 17" x 19" A36 steel base plate
- UHMW polyethylene bearings
- Locking points every 3-inches
- Automatic arm restraints
- Heavy-duty aircraft cable
- Oversized sheave diameter
- Padded safety-shutoff bar
- 4-piece stackable adapter set comes standard
- Triple-telescoping arms
- Telescoping screw pads
- Stackable adapters
- Single piece columns
- Accommodates a variety of vehicles
- Safety locks in each column
- ETL Approved

XPR-10S Symmetric Clearfloor

#5175395



Lifting Capacity - 10,000 lbs.
Max. Rise - 69"
Width - 132" or 145" / Height - 145"

XPR-10S-LP Symmetric Clearfloor Low-Pro™ Arms

#5175396



Lifting Capacity - 10,000 lbs.
Max. Rise - 69"
Width - 132" or 145" / Height - 145"

XPR-10XLS Symmetric Clearfloor Extra Tall

#5175129



NEW!

Lifting Capacity - 10,000 lbs.
Max. Rise - 75"
Width - 132" or 145" / Height - 157"

XPR-10AS Asymmetric Clearfloor

#5175397



Lifting Capacity - 10,000 lbs.
Max. Rise - 69"
Width - 137" or 145" / Height - 145"

XPR-10AS-LP Asymmetric Clearfloor Low-Pro™ Arms

#5175398



Lifting Capacity - 10,000 lbs.
Max. Rise - 69"
Width - 137" or 145" / Height - 145"

XPR-10AXLS Asymmetric Clearfloor Extra Tall

#5175991



NEW!

Lifting Capacity - 10,000 lbs.
Max. Rise - 75"
Width - 137" or 145" / Height - 157"

Turf Kit #5174020
(Fits XPR-10S and XPR-9S series)



Fully adjustable full-width wheel pan and fork assemblies

Lifting Capacity - 7,000 lbs.
Max Wheel Pan Load - 3,500 lbs.
Max Load per Fork - 1,750 lbs.



Features bolt-on top extension for added 24" clearance

XPR-10S-168 #5175399
Clearfloor Extended Height

XPR-10S-168-LP #5175400
Clearfloor Extended Height / Low-Pro Arms

XPR-10AS-168 #5175401
Asymmetric Extended Height

XPR-10AS-168-LP #5175402
Asymmetric Extended Height / Low-Pro Arms

XPR-10XLS-181 #5175231
Clearfloor Extended Height

XPR-10XLS-LP-181 #5175194
Extended Height / Low-Pro Arms



Variability in Specifications and Features: All product specifications and features listed in this catalog are for reference only. For a more accurate and comprehensive listing of product specifications and features, visit www.bendpak.com. The contents of this catalog are subject to change.

ACCESSORIES:



Polyurethane Tuf-Pads
#5700227 (set of 4)



Steel Lift Pads
#5215763 (set of 4)



Frame Cradle Pads
#5215761 (set of 4)



Tall Stacking Adapters
#5215759 (set of 4)




Air / Electric Work Station
#5210438

XPR-10AS
(Shown with optional
air/electric work station)
#5175397



FREE 4-piece 63 mm stackable
adapter set comes standard

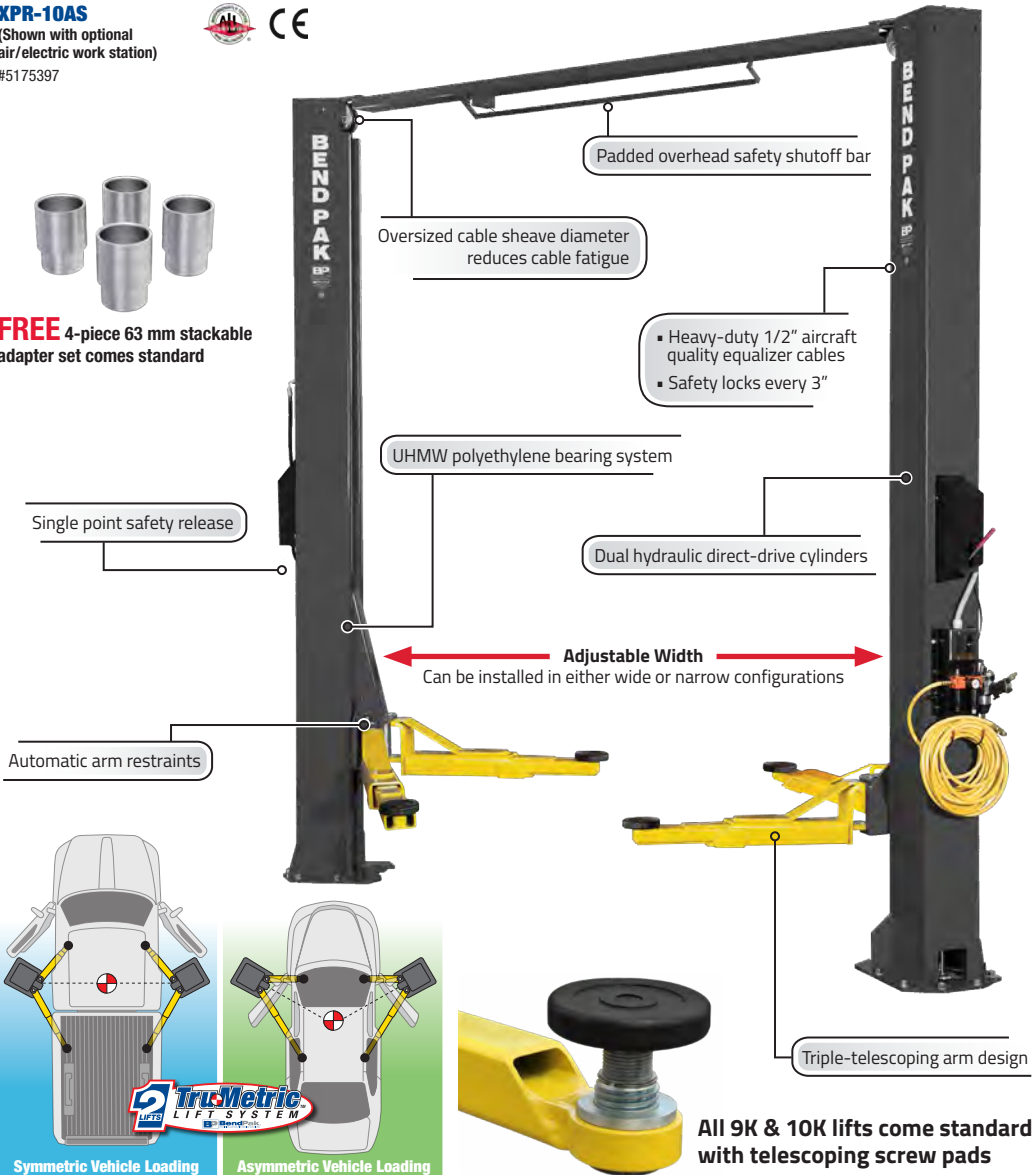

Medium-Heavy Duty Floor Plate

SERIES FEATURES:

- Adjustable width design
- Dual hydraulic lifting cylinders
- Single-piece columns
- Single point safety release
- Drop-end arms provide a lower pad height
- Triple-telescoping arms
- Electric / hydraulic system
- Self-lubricating dura-glide UHMW polyethylene bearing system
- Automatic arm restraints
- 4-piece stackable adapter set (XPR-9's)
- Telescoping screw pads
- Durable powder coat finish
- Safety locks in each column spaced every 3-inches
- Open top design
- Large steel base plates
- Heavy-duty 3/8" equalizer cables
- Rugged steel construction

XPR-9S Shorty Floor Plate

#5175390



Lifting Capacity - 9,000 lbs.
Max. Rise - 72"
Width - 132" or 145" / Height - 113"

XPR-9S-LP Shorty Floor Plate *Low-Pro™ Arms*


#5175391



Lifting Capacity - 9,000 lbs.
Max. Rise - 72"
Width - 132" or 145" / Height - 113"

XPR-12FDL Heavy-Duty Floor Plate

#5175403



Includes 16-Piece Adapter Set

Lifting Capacity - 12,000 lbs.
Max. Rise - 72"
Width - 155" / Height - 144"

Low-Pro™ Arms

2-stage low-profile arms
featured on LP lift models



Low-Profile arms found on these models:

- XPR-9S-LP
- XPR-10S-LP
- XPR-10AS-LP
- XPR-10XLS-LP
- XPR-10AXLS-LP
- XPR-10S-168-LP
- XPR-10AS-168-LP
- XPR-10XLS-181-LP
- XPR-10AXLS-181-LP



XPR-9S



Triple-Telescoping Arms

INTRODUCING **A TALLER TOOL** FOR TOWERING TECHS

NEW!



For technicians challenged to work under a lift all day, common injuries stem from poor working posture and improperly fitted equipment. BendPak's **NEW 10,000-lb. capacity XPR-10AXLS and XPR-10XLS** two-post lifts feature over **80 inches of lifting height** to absolutely tower above other lifts. Make all jobs easier and support the long-term health of taller techs. Plus, get the best warranty and after-sale support that only comes with BendPak.

See pg. 4

1-800-253-2363 • bendpak.com

© 2020 BendPak Inc. BendPak is a registered trademark.

BP BendPak

Heavy-Duty Clearfloor

SERIES FEATURES:

- Dual-synchro equalization system
- Electric / hydraulic power system
- UHMW polyethylene bearings
- Single-piece columns
- Dual "Direct-Drive" cylinders
- Single point safety release
- Automatic arm restraints
- 8-piece stackable adapter pins
- Oversized column base plates
- Padded safety-shutoff bar
- Safety locks in each column
- Heavy-duty 1/2" equalizer cables
- Powder coat finish
- Rubber door bumpers
- Versatile drop in contact pads with convenient storage
- Triple-telescoping arms
- Extended height top-beam provides greater overhead clearance
- Oversized cable sheave diameter
- Rubber lift pads with stackable adapters

XPR-12CL Clearfloor

#5175405



**Includes
16-Piece Adapter Set**

Lifting Capacity - 12,000 lbs.
Max. Rise - 69"
Width - 155" / Height - 170"

XPR-15CL Clearfloor

#5175408



**Includes
16-Piece Adapter Set**

Lifting Capacity - 15,000 lbs.
Max. Rise - 69"
Width - 155" / Height - 170"

XPR-18CL Clearfloor

#5175409



**Includes
16-Piece Adapter Set**

Lifting Capacity - 18,000 lbs.
Max. Rise - 69"
Width - 155" / Height - 170"

XPR-12CL-LTA Long-Reach Telescoping Arms


#5175258




**Includes
16-Piece Adapter Set**

Lifting Capacity - 12,000 lbs.
Max. Rise - 69"
Width - 155" / Height - 170"

16-Piece Adapter Set



Included on all truck two-post models

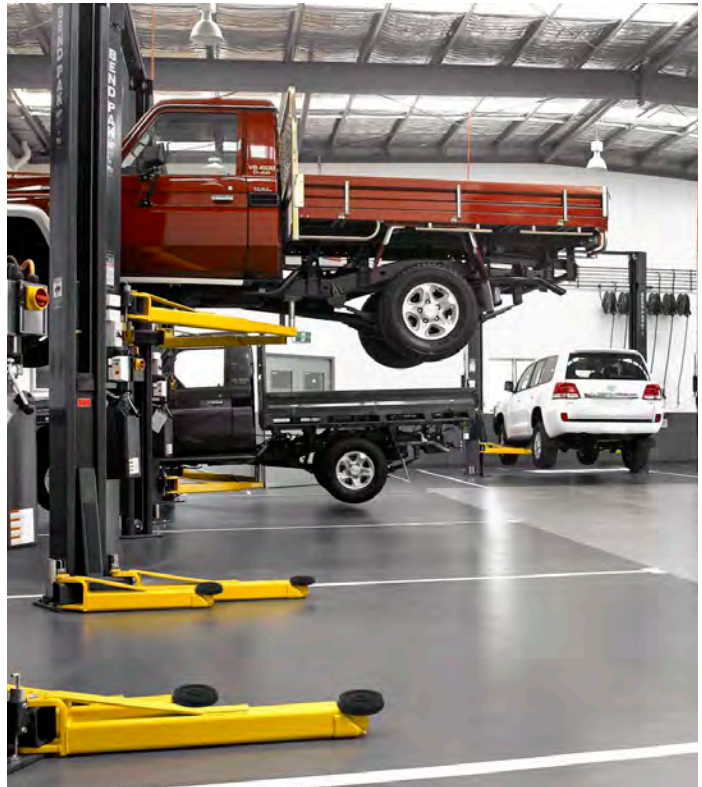

Variability in Specifications and Features: All product specifications and features listed in this catalog are for reference only. For a more accurate and comprehensive listing of product specifications and features, visit www.bendpak.com. The contents of this catalog are subject to change.

ACCESSORIES:



Frame Cradle Pads
#5215761 (set of 4)



Wide Frame Cradle Pads
#5215848 (set of 2)



Mobile High-Lift Jack Stand
#5175001



Steel Lift Pads
#5215763 (set of 4)



Air / Electric Work Station
#5210438



- XPR-12CL-192** #5175407
- XPR-15CL-192** #5175410
- XPR-18CL-192** #5175411



XPR-12CL-192-LTA #5175259
Features bolt on top extension for added 24" clearance



Padded overhead safety shutoff bar

Oversized cable sheave diameter reduces cable fatigue

- Heavy-duty 1/2" aircraft-quality equalizer cables
- Safety locks every 3"

Automatic arm restraints

UHMW polyethylene bearing system

Durable rubber lift pads

Dual hydraulic direct-drive cylinders

Adapter storage

Oversized A36 steel base plates

Single point safety release

FREE 16-Piece adapter set comes standard with all Heavy-Duty Lifts



WHEN BALANCING SAFETY AND BENDPAK GOES THE

LONG-REACH ARMS PROVIDE BETTER CENTER-OF-GRAVITY LOADING

When servicing trucks and vans with extremely long wheelbases, longer-reach arms deliver a more stable lifting solution. The lengthy triple-telescoping arms on BendPak's new **ALI Certified XPR-12CL-LTA** extend to 72" long – that's six feet in length and over one foot longer than almost any other lift or brand in its class. And with rugged BendPak dependability combined with a 16-piece adapter set, you'll realize that balancing safety* and worker productivity has never been so perfectly matched. For more information visit www.bendpak.com/LTA or call **1-800-253-2363**.



Stackable adapters come standard




Frame Cradle Pads come standard




36" - 72" arm reach

www.bendpak.com/LTA ■ 1-800-253-2363

D PRODUCTIVITY, DISTANCE.

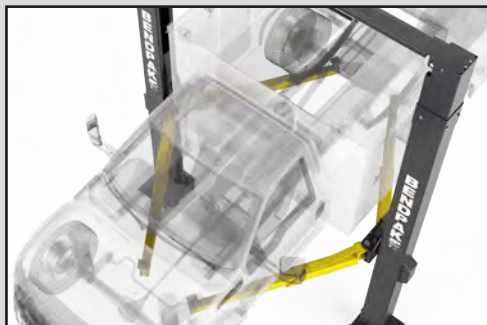

- 12,000-lb. lifting capacity
- Dual direct-drive hydraulic cylinders
- Oversized 53" tall carriage for superior strength and durability

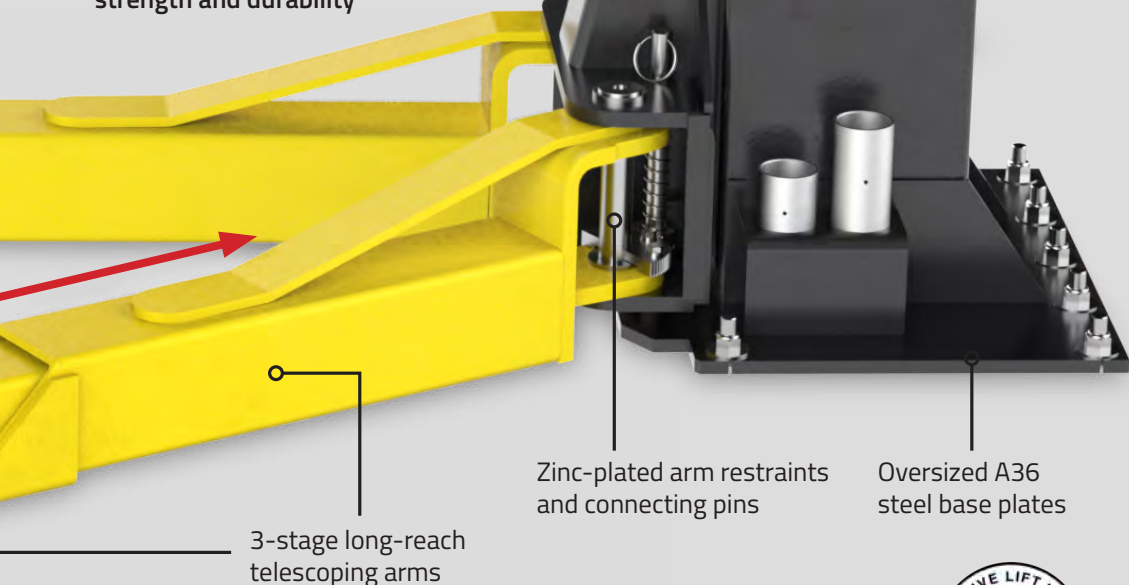

3-stage long-reach telescoping arms

Zinc-plated arm restraints and connecting pins

Oversized A36 steel base plates

*Always read and follow all safety warnings that accompanied your lifting equipment at the time of purchase. More information regarding vehicle lift safety is available directly from BendPak or from the Automotive Lift Institute.



2-Post Light-Duty Home Garage

SERIES FEATURES:

- 7,000-lb lifting capacity
- Telescoping Low-Pro™ arms for sports cars
- Bi-metric asymmetric & symmetric arm configuration
- Lowered arm tube supports
- Automatic arm restraints
- Taller lift carriages
- Single release-point operation
- Automatic safety locks
- Single hidden hydraulic cylinder
- (2) redundant safety cables
- Multiple lock positions
- Powder coat finish



GP-7LCS Short Height

#5175995



Fits 9 ft. Ceilings

Lifting Capacity - 7,000 lbs.
Max. Rise - 58"
Width - 125" / Height - 106.5"

GP-7LC Medium Height

#5175996



Fits 10 ft. Ceilings

Lifting Capacity - 7,000 lbs.
Max. Rise - 68"
Width - 125" / Height - 118.5"

GP-7 Tall Height

#5175992




Max. Rise 78 in.

Lifting Capacity - 7,000 lbs.
Max. Rise - 78"
Width - 125" / Height - 150"

PERFECT FOR LOW CEILINGS

GP-7LCS Short Height 2-Post Lift

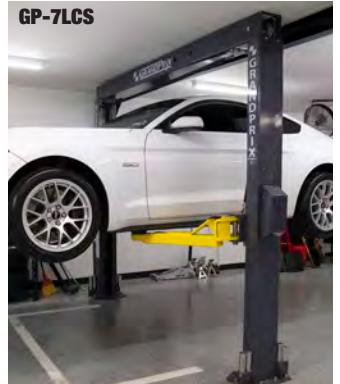

4-Post Medium-Duty Home Garage

SERIES FEATURES:

- 9,000-lb lifting capacity
- Designed to be fastened to the floor or free-standing
- Boxed-steel columns are made from structural 4.75" x 4.75" welded steel tubing.
- Columns feature 12" x 12" baseplates 5/8" thick.
- Manual dead bolt locks are reliable and safe and are machined directly into the boxed-steel columns.
- 13 positive locking positions are spaced every 4 inches.
- Runways are welded and boxed for extra strength
- Built-in flow restriction integrated into the hydraulic cylinder to prevent free-fall.
- Sheave axles feature hardened steel collars and snap rings.
- Pull out tire stops on both ends of the lift that allows drive through capability.



GP-9F Standard **GRANDPRIX**
#5175254



Lifting Capacity - 9,000 lbs.
Max. Rise - 72.5" / Runway Length - 165"
Width - 113" / Length - 210"



GP-9 MODELS INCLUDE

Polyethylene Drip Trays

Aluminum Approach Ramps

Mobile Jack Tray

Quick-Mount Casters

GP-9XLT Tall / Long **GRANDPRIX**
#51751257



Lifting Capacity - 9,000 lbs.
Max. Rise - 84.5" / Runway Length - 189"
Width - 113" / Length - 234"



Manual dead bolt locks



Pull out tire stops



13 Locking Positions

4-Post Light-Duty

SERIES FEATURES:

- Runways feature non-skid surface
- Single hydraulic cylinder under ramp
- Fully enclosed lifting cables, safety locks and sheaves
- Pneumatic push-button safety release
- Features 1-1/4" sheave axles
- Features heavy-duty 3/8" aircraft cable
- Internal "anti-sway" slider blocks in each column
- Electric / hydraulic power system
- Oversized sheave diameters
- Rugged, self-lubricating cable sheaves
- Multi-position safety locks in columns
- Dual-position power unit locations
- Redundant slack-cable safety latches
- Fully adjustable lock leveling stops
- Drive through ramps option available
- 36" approach ramps available
- Durable powder coat finish
- Rugged steel construction
- High-speed lifting

**HD-7P
Narrow**
#5175510



Lifting Capacity - 7,000 lbs.
Max. Rise - 82" / Runway Length - 164"
Width - 99.75" / Length - 200"

**HD-7W
Wide**
#5175120



Lifting Capacity - 7,000 lbs.
Max. Rise - 82" / Runway Length - 164"
Width - 110.25" / Length - 200"

**HD-7500BLX
Boat Lift**
#5175315



Lifting Capacity - 7,500 lbs.
Max. Rise - 82" / Runway Length - 188.5"
Width - 132" / Length - 224"

**HD-7PXW
Super-Tall**
#5175516



Lifting Capacity - 7,000 lbs.
Max. Rise - 140" / Runway Length - 188"
Width - 110.25" / Length - 224.5"

**HD-7MZ
Super-Tall**
#5175508



Lifting Capacity - 7,000 lbs.
Max. Rise - 140" / Runway Length - 188"
Width - 110.25" / Length - 213"

HD-7MZ



SPECIAL LIFT COLORS

Customize your BendPak lift with the color that best suits your garage or shop interior design. Gunmetal **Gray** comes standard, but for a nominal fee you can choose from optional Classic **Blue**, Graphite **Black** or race-inspired Seca **Red**. Available on select models.



Classic Blue



Graphite Black



Seca Red

SHIP, DELIVER & INSTALL. WE DO IT ALL.

Shop Planning • Above Ground Lift Installation • Painless Equipment Delivery

SERVICE IS OUR SPECIALTY

BendPak has a network of installation and service teams throughout the United States authorized to provide installation and support on all of the products we sell. With over 700 service centers, you can rest assured that the products you purchase from BendPak are backed by a nationwide team of qualified service personnel. At BendPak, we've made a commitment to offer unparalleled service and support. More than just a seller, we want to be your automotive equipment partner for life.

FREE SHIPPING*

At BendPak, we are dedicated to delivering your purchase as quickly and affordably as possible. All products marked FREE SHIPPING include FREE destination delivery to all direct shipping points within the 48 contiguous United States. For heavy equipment purchases, we offer a range of delivery and pick-up options so you can choose the shipping method that best meets your needs.



WE SHIP



WE DELIVER



WE INSTALL

EASY TO ORDER – DELIVERED RIGHT TO YOUR DOOR

Ordering lifts or shop equipment from BendPak is fast and easy. Whether for the shop or home, we'll make sure your order is delivered to you as fast and convenient as possible. And we'll arrange the installation and set-up as well if you wish. Placing an order takes just minutes. Either call and speak to one of our courteous specialists or place your order online and click your way through. If you ever need assistance or advice, our friendly consultants are only a phone call away. We look forward to serving you.

IF YOU FIND A LOWER PRICE, WE'LL MATCH IT OR BEAT IT - GUARANTEED.

If you find a lower price anywhere on an identical BendPak™ or Ranger™ brand product sold in the United States, show us the lower advertised price at the time of purchase and we will match it on the spot. Or show us the lower price within 14 days of your purchase and we will pay you the difference. We will not match other retailer's mail-in rebates nor will we deduct the value of any gift with purchase.



BendPak reserves the right to verify all information. Our low-price guarantee covers identical BendPak and Ranger branded items with the same model number, features and U.S. warranty. The item must be in stock and available for purchase at the price as advertised. We reserve the right to call and verify that the item is in stock and available for purchase at the price as advertised. Low price guarantee applies only to items shown in this flyer. Taxes, ad errors, closeouts, clearance, liquidation, free product offers, special orders, offers advertised at a specific location and refurbished items are also excluded from this guarantee.



4-Post Medium-Duty

SERIES FEATURES:

- Freestanding or bolt-down design
- Runways feature non-skid surface
- Single hydraulic cylinder under ramp
- Fully enclosed lifting cables, safety locks and sheaves
- Pneumatic push-button safety release
- Features 1-1/4" sheave axles
- Internal "anti-sway" slider blocks in each column
- Features heavy-duty 3/8" aircraft cable
- Longer ramps for low ground clearance vehicles
- Oversized sheave diameters
- Rugged, self-lubricating cable sheaves
- Multi-position safety locks in columns
- Dual-position power unit locations
- Redundant slack-cable safety latches
- Fully adjustable lock leveling stops
- Drive through ramps option available
- 36" approach ramps available
- Perfect for parking, storage and service

HD-9 Wide Standard

#5175861



Lifting Capacity - 9,000 lbs.
Max. Rise - 70" / Runway Length - 164"
Width - 110.25" / Length - 200"

HD-9ST Narrow Standard

#5175860



Lifting Capacity - 9,000 lbs.
Max. Rise - 70" / Runway Length - 164"
Width - 100.25" / Length - 200"

HD-9STX Narrow Tall Long

#5175862



Lifting Capacity - 9,000 lbs.
Max. Rise - 82" / Runway Length - 188"
Width - 100.25" / Length - 224"



HD-9ST

HD-9XW Wide Tall Long

#5175863



Lifting Capacity - 9,000 lbs.
Max. Rise - 82" / Runway Length - 188"
Width - 110.25" / Length - 224"

HD-9



HD-9XL Wide Standard Long


#5175859



Lifting Capacity - 9,000 lbs.
Max. Rise - 70" / Runway Length - 188"
Width - 110.25" / Length - 224"

Variability in Specifications and Features: All product specifications and features listed in this catalog are for reference only. For a more accurate and comprehensive listing of product specifications and features, visit www.bendpak.com. The contents of this catalog are subject to change.

ACCESSORIES:




Jack Platform
(Jacks not included)



Caster Kit
#5210997



RBJ4500 Rolling Bridge Jack
#5175988 (ea)



Aluminum Deck



Drip Trays
#5700301 (set of 2)

HD-9SW Double Wide Standard

#5175023



Lifting Capacity - 9,000 lbs.
Max. Rise - 70" / Runway Length - 164"
Width - 202" / Length - 200"

HD-9SWX Double Wide Tall Long

#5175024



Lifting Capacity - 9,000 lbs.
Max. Rise - 82" / Runway Length - 188"
Width - 202" / Length - 224"



HD-9 Series

Oversize self-lubricating cable sheaves

- Push button pneumatic safety release
- Electric/hydraulic power system
- Optional power unit locations

Rugged 1-1/4" roller axles

Independent backup slack-cable safety latches

Optional rolling bridge jacks

Adjustable lock ladders

Longer approach ramps

- Heavy-duty 3/8" aircraft cables
- Multi-position safety locks



See it on the BendPak / Ranger YouTube Page

Options/Accessories



Caster Kit #5210997
Fits HD-7 & HD-9 Series




RBJ4500 #5175988
Rolling Bridge Jack




(Bottle jacks not included)
JP-45 #5215825
4,500 lb. Capacity Jack Platform




(Bottle jacks not included)
JP-6 Telescoping #5175349
6,000 lb. Capacity Jack Platform




WSA-100 #5210438
Air Electric Work Station




#5210208 (Long-Wide)
#5210174 (Long-Narrow)
#5210209 (Short-Wide)
#5210207 (Short-Narrow)
Solid Aluminum Decks



#5174497
Aluminum Approach Ramps
Width - 19.75" / Length - 36.75"



#5174670 (HD-9SW/SWX)
#5174705 (HD-7 & HD-9 Series)
Extended Alum. Approach Ramps
Width - 19.75" / Length - 48"



#5210055 (HD-7 & HD-9 Series)
#5210747 (HDS-14 Series)
#5210328 (HDS-18 & HDS-27 Series)
#5210325 (HDS-35 & HDS-40 Series)
Extended Steel Approach Ramps
Width - 19.75" / Length - 48"



Caster Kit



Solid Aluminum Decks

This is my BendPak



***There are many,
But this one's mine.***

"Here at Kindig-it Design we specialize in Bitchin' Rides and that takes killer equipment, that's why we use BendPak"

- Dave Kindig, Accomplished Designer specialized in Hot Rod Customs Owner of Kindig-it Design and star of TV's "Bitchin' Rides"
www.kindigit.com

BP BendPak®

For more information on BendPak's entire product line, call 1-800-253-2363 or visit www.bendpak.com

© 2020 BendPak Inc. All rights reserved.

4-Post Heavy-Duty

SERIES FEATURES:

- Adjustable runway widths
- Single hydraulic cylinder under ramp
- Fully enclosed lifting cables, safety locks and sheaves
- Pneumatic push-button safety release
- Features heavy-duty aircraft cable
- Runways feature non-skid surface
- Internal "anti-sway" slider blocks in each column
- Longer ramps for low ground clearance vehicles
- Oversized sheave diameters
- Rugged, self-lubricating cable sheaves
- Features heavy-duty sheave axles
- Multi-position safety locks in columns
- Dual-position power unit locations
- Redundant slack-cable safety latches
- Fully adjustable lock leveling stops
- Drive-through ramps option available
- 48" approach ramps available
- Customizable power unit location

HDS-14 Standard Length

#5175170



Lifting Capacity - 14,000 lbs.
Max. Rise - 70" / Runway Length - 199"
Width - 130" / Length - 241"

HDS-14X Extended Length

#5175173



Lifting Capacity - 14,000 lbs.
Max. Rise - 70" / Runway Length - 229"
Width - 130" / Length - 271"

HD-14T Super Tall

#5175004



Lifting Capacity - 14,000 lbs.
Max. Rise - 82" / Runway Length - 191"
Width - 126" / Length - 234"

HDSO-14P Open Front Standard Length

#5175152



Lifting Capacity - 14,000 lbs.
Max. Rise - 70" / Runway Length - 199"
Width - 143" / Length - 244"

HDS-18E Standard Length

#5175968



Lifting Capacity - 18,000 lbs.
Max. Rise - 60" / Runway Length - 249"
Width - 154" / Length - 297"

HDS-27 Standard Length

#5175162



Lifting Capacity - 27,000 lbs.
Max. Rise - 60" / Runway Length - 249"
Width - 154" / Length - 297"

HDS-18E



HDS-27X



Variability in Specifications and Features: All product specifications and features listed in this catalog are for reference only. For a more accurate and comprehensive listing of product specifications and features, visit www.bendpak.com. The contents of this catalog are subject to change.

ACCESSORIES:



Rolling Bridge Jack



DP-30 Rolling Oil Drain
#5150509



Air / Electric Work Station
#5210436



Rolling Bridge Airline Kit
#5174010

HDS-27X Extended Length

#5175164



Lifting Capacity - 27,000 lbs.
Max. Rise - 60" / Runway Length - 309"
Width - 154" / Length - 357"

HDS-40 Standard Length

#5175176



Lifting Capacity - 40,000 lbs.
Max. Rise - 60" / Runway Length - 250"
Width - 154" / Length - 297"


HDS-40X Extended Length

#5175178



Lifting Capacity - 40,000 lbs.
Max. Rise - 60" / Runway Length - 310"
Width - 154" / Length - 357"

HDS-40X Shown with optional rolling bridge jacks

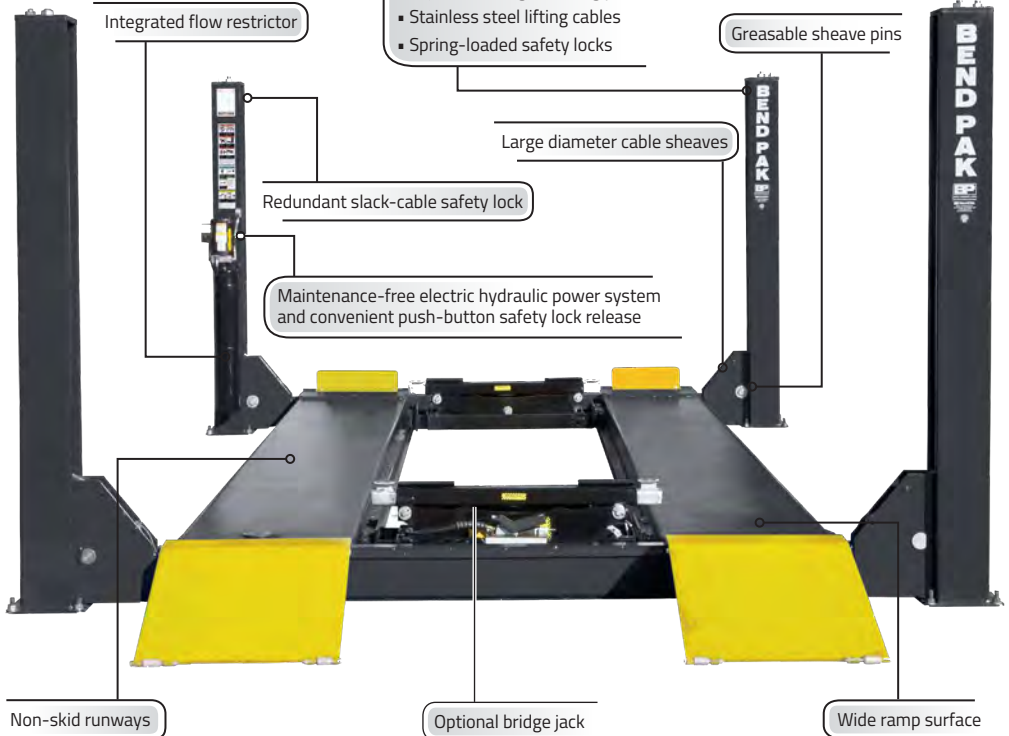

Alignment Lifts

SERIES FEATURES:

- Runways adjust to different widths
- Multi auto-level locking positions
- Single hydraulic cylinder
- Fully enclosed lifting cables and sheaves
- Pneumatic push-button safety release
- Heavy-duty aircraft cable
- Runways feature non-skid surface
- Self-lubricating cable sheaves
- Oversized sheave diameter
- Features heavy-duty sheave axles
- Fully adjustable lock stops
- Drive through ramps available
- Rolling bridge airline kit available
- Roll back kit available



Equipped with rear slip plates and galvanized front turn plates

HD-9AE Alignment Lift

#5175820



Max. 2 Wheel Align. - 160" / Max. Rise - 70"
Capacity - 9,000 lbs. / Runway Length - 188"
Width - 127" / Length - 224"

HDSO-14AX Open Front

#5175153



Max. 2 Wheel Align. - 182" / Max. Rise - 70"
Capacity - 14,000 lbs. / Runway Length - 199"
Width - 143" / Length - 243"

HDS-14LSX Extended Length

#5175171



Max. 2 Wheel Align. - 182" / Max. Rise - 70"
Capacity - 14,000 lbs. / Runway Length - 199"
Width - 130" / Length - 241"

HDS-14LSXE Limo Extended Length

#5175172



Max. 2 Wheel Align. - 212" / Max. Rise - 70"
Capacity - 14,000 lbs. / Runway Length - 229"
Width - 130" / Length - 271"



HDS-18EA Truck Alignment

#5175969



Max. 2 Wheel Align. - 211" / Max. Rise - 60"
Capacity - 18,000 lbs. / Runway Length - 263"
Width - 154" / Length - 297"

**NEED PARTS? WE HAVE THEM TOO.
CALL US TOLL FREE 1-800-253-2363**



Have Questions? BendPak Has Answers.



"After calling and giving my lift's serial number to BendPak's support team, my problem was fixed in no time! I would recommend BendPak to anyone!" - Mike H

No One Beats BendPak's Customer Service!

BendPak's rugged, dependable designs require very little service or maintenance, while our impressively low-cost replacement parts help you earn more and spend less. Plus, our 5-2-1 Standard Warranty is the best in the business. Should you ever require assistance, we offer 300+ Certified Service Centers, often within five miles of your location. When you choose BendPak, you gain lifetime access to our highly trained team of customer service specialists. We promise to provide individual attention and support until the solution we reach is to your satisfaction.

- ✓ **INDUSTRY'S BEST WARRANTY**
- ✓ **LOW COST OF OWNERSHIP**
- ✓ **NATIONWIDE INSTALLATION**
- ✓ **AFTER-THE-SALE SUPPORT**
- ✓ **MORE SAME-DAY SHIPPING**



Visit us at www.bendpak.com

BP BendPak

© 2020 BendPak Inc. All rights reserved.

Rolling Bridge Jacks

SERIES FEATURES:

- 4,500 - 25,000 lb. lifting capacity
- Versatile drop in lifting pads
- Multi-piece adapter set standard
- High-pressure hydraulic power unit
- Stackable adapters
- Automatic safety locks
- Three safety-lock positions
- Rubber lifting pads or steel lifting pads come standard or optional
- Optional air-line kit
- Raise 2 or 4 wheels off the runways
- Telescoping roller design allows the runways to be adjusted for different tread widths



RBJ4500 Rolling Jack

#5175988



Lifting Capacity - 4,500 lbs.
Lift Pad Reach - 40" - 63"
Frame Reach - 35" - 45.5"

RBJ6000 Rolling Jack

#5175987



Lifting Capacity - 6,000 lbs.
Lift Pad Reach - 40" - 63"
Frame Reach - 35" - 45.5"

RBJ7000 Rolling Jack

#5175986



Lifting Capacity - 7,000 lbs.
Lift Pad Reach - 42" - 59"
Frame Reach - 35" - 45.5"

RBJ9000 Rolling Jack

#5175985



Lifting Capacity - 9,000 lbs.
Lift Pad Reach - 40" - 63"
Frame Reach - 45" - 51.5"

RBJ15000 Rolling Jack

#5175031



Lifting Capacity - 15,000 lbs.
Lift Pad Reach - 45" - 58"
Frame Reach - 44" - 58"

INCLUDES:
8-Piece Adapter Set

RBJ18000 Rolling Jack

#5175032



Lifting Capacity - 18,000 lbs.
Lift Pad Reach - 43" - 64"
Frame Reach - 45"

INCLUDES:
8-Piece Adapter Set

RBJ25000 Rolling Jack

#5175033



Lifting Capacity - 25,000 lbs.
Lift Pad Reach - 43" - 64"
Frame Reach - 45"

INCLUDES:
8-Piece Adapter Set

RJ-45



NOTE: The model RJ-45 has a lower drive-over height. It predates ALI certification and is special-order only.

***This is my
BendPak***



***There are many,
But this one's ~~mine~~.
Ours***

"We build REAL badass trucks. Our diesel runs on pure BendPak pride, baby!"

- Diesel Dave & Heavy D, Owners of Sparks Motors,
stars of TV's "Diesel Brothers"
www.dieselsellerz.com

BP BendPak®

For more information on BendPak's entire product line,
call 1-800-253-2363 or visit www.bendpak.com

© 2020 BendPak, Inc. All rights reserved.


Quatra Scissors

SERIES FEATURES:

- 12,000-lb. lifting capacity
- Extended runway design
- Durable powder coat finish
- Multi-position runway work steps
- Non-skid runways for sure grip
- Electric / hydraulic power system
- Integrated velocity fuses for cylinders
- Power console with simple controls
- Open-center design
- Quad automatic safety locks with pneumatic push-button release
- Lubricated bearing on all pivot points
- Rugged steel legs
- Can be flush mounted or recessed
- Easy to use and understand
- High efficiency hydraulic power unit
- Equipped with rear slip plates and galvanized front turn plates
- Straight up vertical lifting
- Multi-position automatic leveling system
- Easy access to components for servicing

XR-12000AL Alignment Lift

#5175184

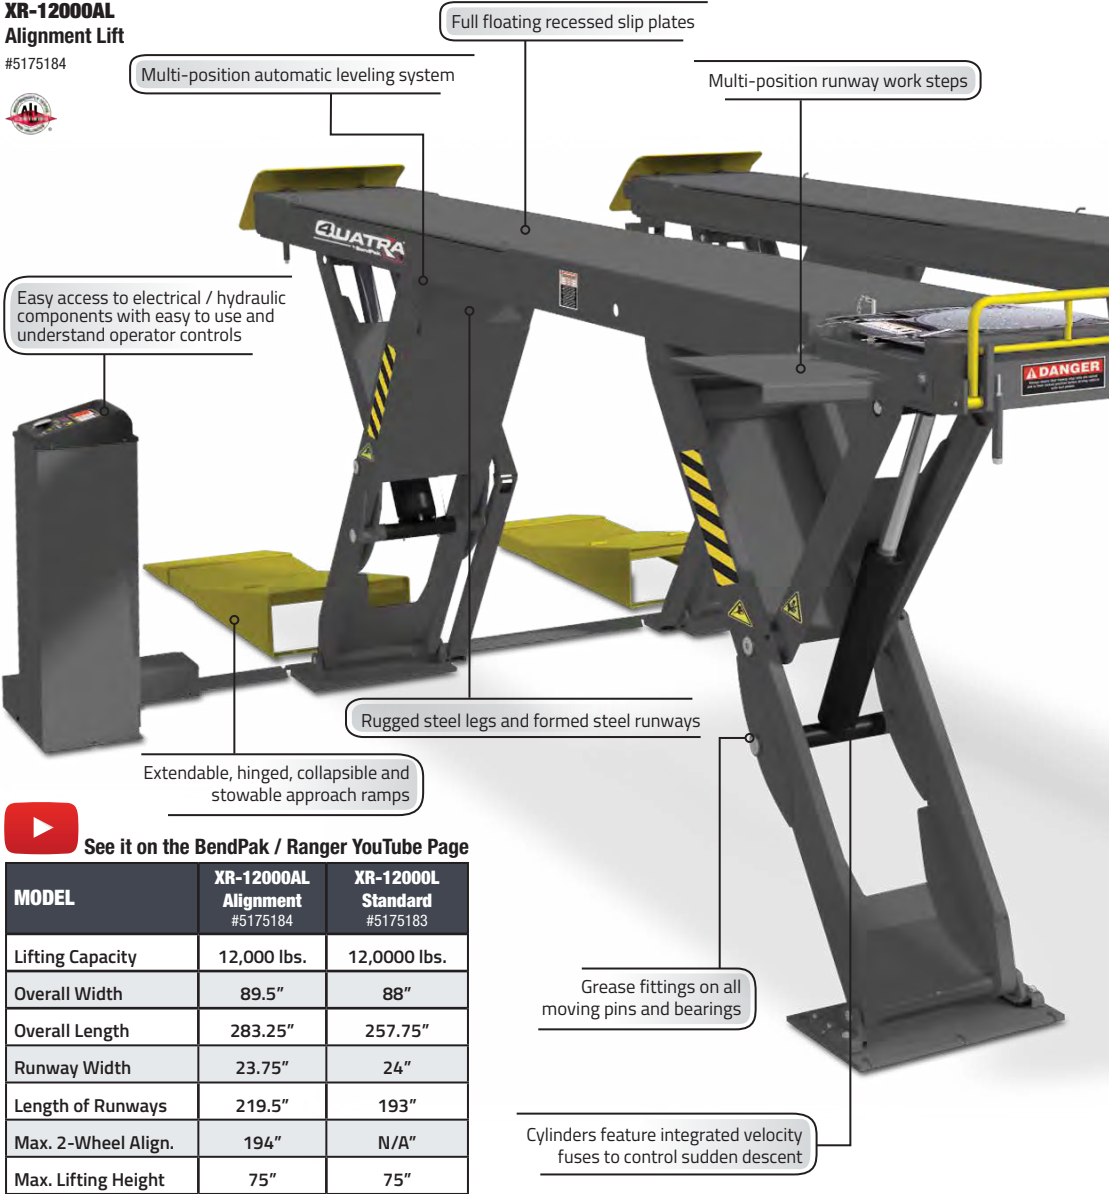

See it on the BendPak / Ranger YouTube Page

MODEL	XR-12000AL Alignment #5175184	XR-12000L Standard #5175183
Lifting Capacity	12,000 lbs.	12,000 lbs.
Overall Width	89.5"	88"
Overall Length	283.25"	257.75"
Runway Width	23.75"	24"
Length of Runways	219.5"	193"
Max. 2-Wheel Align.	194"	N/A"
Max. Lifting Height	75"	75"

Variability in Specifications and Features: All product specifications and features listed in this catalog are for reference only. For a more accurate and comprehensive listing of product specifications and features, visit www.bendpak.com. The contents of this catalog are subject to change.

ACCESSORIES:




DP-30 Rolling Oil Drain
#5150509



3D Aligner (pg. 39)
#5140101



Rolling Bridge Airline Kit
#5174008

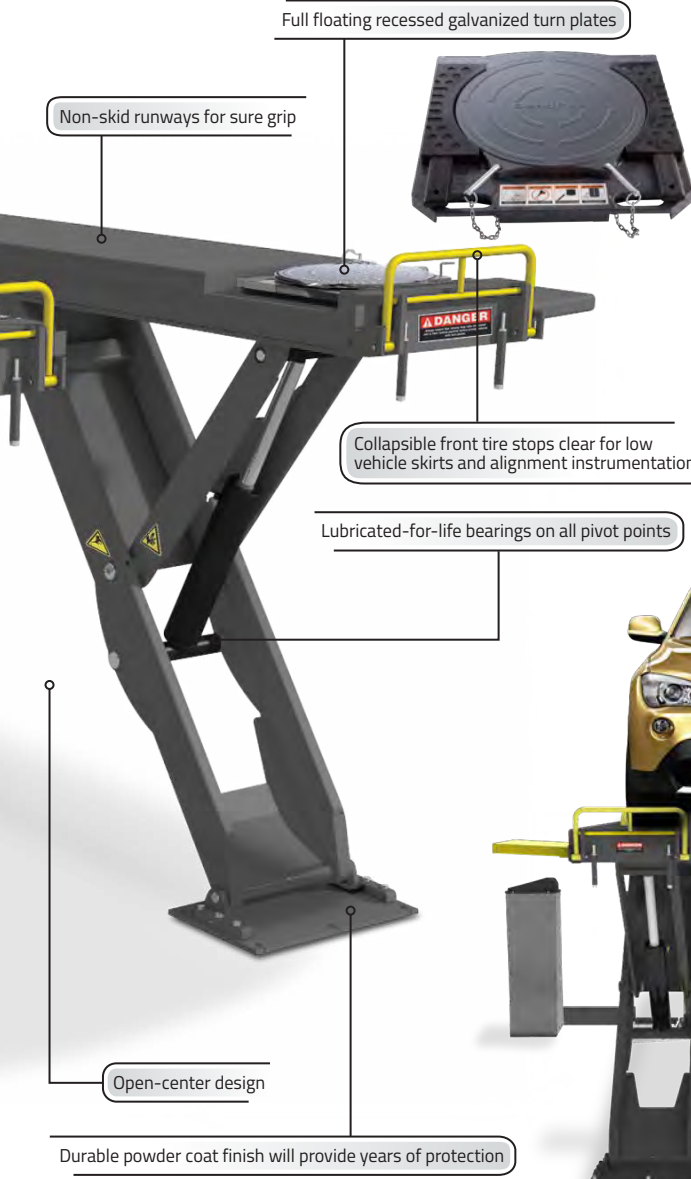

Optional RBI6000 - 6,000 lb. capacity rolling bridge jack



**XR-12000L
Standard Deck**
#5175183



This is my BendPak

***There are many,
but this one's mine.***

"Keeping my shop working efficiently and safe during endless hours of filming and running a Mopar specialty shop is not easy. That's why I use the best tools and equipment money can buy. I am a true believer in BendPak because they build the best products and offer great service. My BendPak's are one part of my operation that I can truly depend on which allows me to focus on other parts of my business, like resurrecting the best Mopars on the planet."

*-Mark Worman, Master of all things Mopar
Owner of Welby's Car Care Center and
star of TV's "Graveyard Carz"*

BP BendPak®

For more information on BendPak's entire product line,
call 1-800-253-2363 or visit www.bendpak.com

© 2020 BendPak Inc. All rights reserved.

Portable Column Lift

SERIES FEATURES:

- 18,000-lb. individual column capacity
- 108,000-lb. maximum system capacity
- SINGLE, PAIR or TEAM operation
- Three, 30' cables are used, leaving the front or back of the lift clear of cables
- Self-diagnostics and self-calibration
- Control systems feature 24-volt circuitry
- Variable height limit settings
- Two-speed lowering option settings
- Equipped with a warning light and audible alarm for critical warning alerts
- Emergency shutoff on each column
- Key lock enclosure on each column
- Electronics are multi-fuse protected
- Enclosed electric-hydraulic power system
- Pallet-jack style steering wheels
- Extended forks accommodate wide tires and deep wheel configurations
- Multi-width wheel forks with locking pins
- Tandem 8" diameter polyurethane covered steel wheels

PCL-18B (Set of 4)

#5175292



Column Capacity - 18,000 lbs.
System Capacity - 72,000 lbs.
Lifting Height - 71.5"

PCL-18B (Set of 6)

#5175293




Column Capacity - 18,000 lbs.
System Capacity - 108,000 lbs.
Lifting Height - 71.5"

PCL-18B (Set of 8)

#5175294



Column Capacity - 18,000 lbs.
System Capacity - 144,000 lbs.
Lifting Height - 71.5"

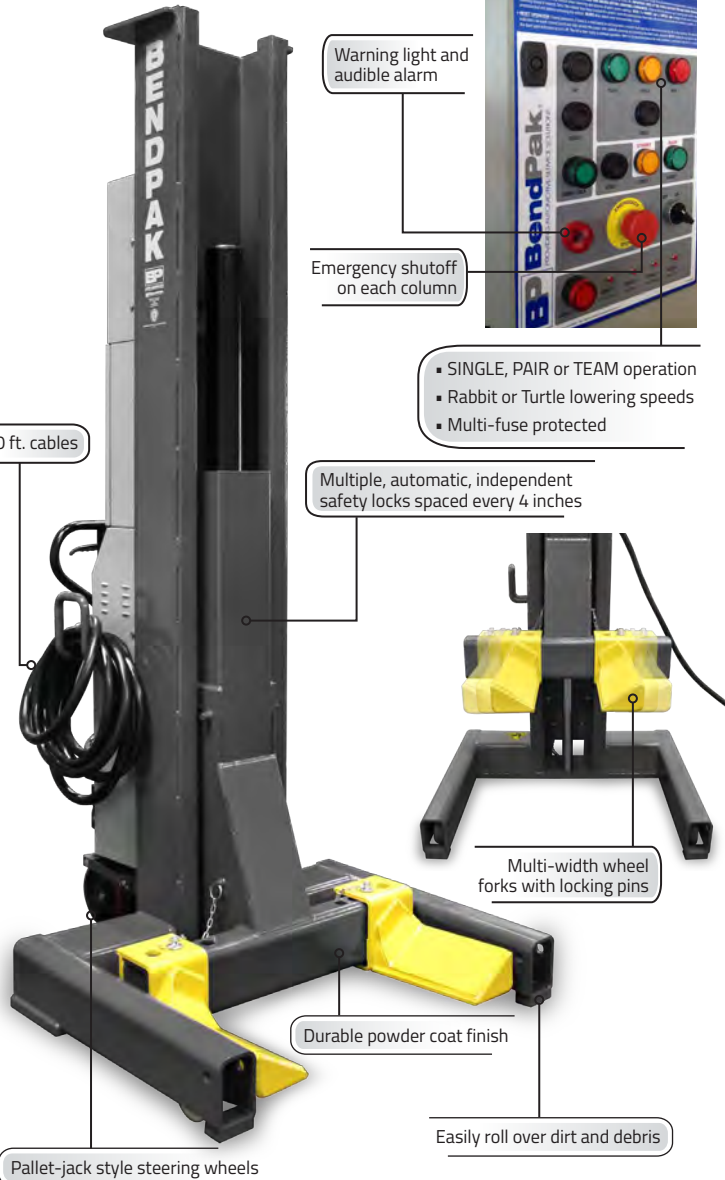

Low-Rise / Mid-Rise / Full-Rise

SERIES FEATURES:



MD-6XP Model
Multi Piece Adapter Set



SP-7X & All Low-Rise Models
1.5" Rubber Lift Blocks



Portable Models
Mobile Power Cart

LR-60 Low-Rise Lift

#5175729



Comes standard
with rubber lift blocks

Lifting Capacity - 6,000 lbs.
Lift Pad Dimensions - 18" x 53"
Height Range - 4" - 26"

LR-60P Low-Rise Portable Lift

#5175728



Comes standard
with rubber lift blocks

Lifting Capacity - 6,000 lbs.
Lift Pad Dimensions - 18" x 53"
Height Range - 4" - 26"

P9000LT Low-Rise Pit Lift

#5175133



Comes standard
with rubber lift blocks

Lifting Capacity - 9,000 lbs.
Lift Pad Dimensions - 23" x 53"
Height Range - 3.5" - 21"

MD-6XP

#5175730



Perfect for light-duty trucks and cars

Durable powder coat finish

Safety lock bar with multiple lock positions

Adjustable arm assemblies

Solid steel torsion bar

Twin hydraulic cylinders

Portable motor cart
serves as tow handle

Multi piece adapter set

P9000LTF Low-Rise Pit Lift Flush Mount

#5175155



Comes standard
with rubber lift blocks

Lifting Capacity - 9,000 lbs.
Lift Pad Dimensions - 23" x 53"
Height Range - 3.5" - 21"

Optional P-9000 Series Telescoping Arm Kit

#5210194



Capacity / Each arm - 2,250 lbs.
(4) Lift Arms • (4) Contact pads

Variability in Specifications and Features: All product specifications and features listed in this catalog are for reference only. For a more accurate and comprehensive listing of product specifications and features, visit www.bendpak.com. The contents of this catalog are subject to change.


ACCESSORIES:




1.5" Rubber Lift Blocks



3" Rubber Lift Blocks



6" Rubber Lift Blocks



LR-4A Arm Kit
#5210944

LR10000 Low-Rise Lift

#5175232



Comes standard
with 8-pc. adapter set

Lifting Capacity - 10,000 lbs.
Lift Pad Dimensions - 24" x 53"
Height Range - 4" - 22.75"

MDS-6LP Mid-Rise Scissor Lift

#5175226



Comes standard
with rubber lift blocks

Lifting Capacity - 6,000 lbs.
Lift Pad Dimensions - 19" x 67"
Height Range - 4.5" - 43"

MDS-6LPF Mid-Rise Scissor Flush Mount

#5175227



Comes standard
with rubber lift blocks

Lifting Capacity - 6,000 lbs.
Lift Pad Dimensions - 19" x 67"
Height Range - 4.5" - 43"

MD-6XP Mid-Rise Portable Lift

#5175730



Comes standard
with adapter set

Lifting Capacity - 6,000 lbs.
Adjustable Arms
Height Range - 4.75" - 48"

MDS-6EXT Mid-Rise Scissor Lift Extended

#5175192



Comes standard
with rubber lift blocks

Lifting Capacity - 6,000 lbs.
Lift Pad Dimensions - 19" x 79"
Height Range - 4" - 37"

MDS-6EXTF Mid-Rise Scissor Lift Extended Flush-Mount

#5175151



Comes standard
with rubber lift blocks

Lifting Capacity - 6,000 lbs.
Lift Pad Dimensions - 19" x 79"
Height Range - 4" - 37"

SP-7XL Full-Rise Scissor Lift

#5175994



Comes standard
with rubber lift blocks

Capacity - 7,000 lbs.
Lift Pad Dimensions - 21.5" x 63" - 70"
Height Range - 5" - 68"


SP-7XLF Full-Rise Flush Mount Scissor Lift

#5175993



Comes standard
with rubber lift blocks

Capacity - 7,000 lbs.
Lift Pad Dimensions - 21.5" x 63" - 70"
Height Range - 5" - 68"

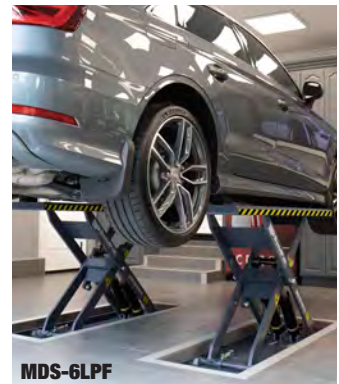

MDS-6LPF

Parking & Storage Lifts

A6S FEATURES:

- 6,000-lb. lifting capacity
- Simple push button controls
- Dual, direct drive hydraulic lifting cylinders
- Automatic safety locks engage at six different parking heights
- Minimal footprint fits a typical parking space
- 100% hot dipped, galvanized steel platform
- Accommodates cars, light trucks and SUVs

HD-973P FEATURES:

- Power console with simple controls
- Open-center design
- Quad automatic safety locks with pneumatic push-button release
- Lubricated bearing on all pivot points
- Rugged steel legs
- Can be flush mounted or recessed

A6S Scissors Parking Lift

#5175274



Capacity - 6,000 lbs.
Lifting Height (Top Lock) - 81"
Overall Width - 103" / Length - 143"


A6W Extra Wide Scissors Parking Lift

#5175282



Capacity - 6,000 lbs.
Lifting Height (Top Lock) - 81"
Overall Width - 111" / Length - 143"

GALVANIZED OPTION AVAILABLE



A6S-G
A6W-G

HD-973P Tri-Level Parking Lift

#5175238




Capacity - 7K lbs. Top Deck / 9K lbs. Bot. Deck
Runway (L) - 188.5" / Overall Height - 161"
Width - 112" / Length - 242"

HD-973PX Tri-Level Parking Lift Extended

#5175267



Capacity - 7K lbs. Top Deck / 9K lbs. Bot. Deck
Runway (L) - 199" / Overall Height - 245"
Width - 112" / Length - 252"

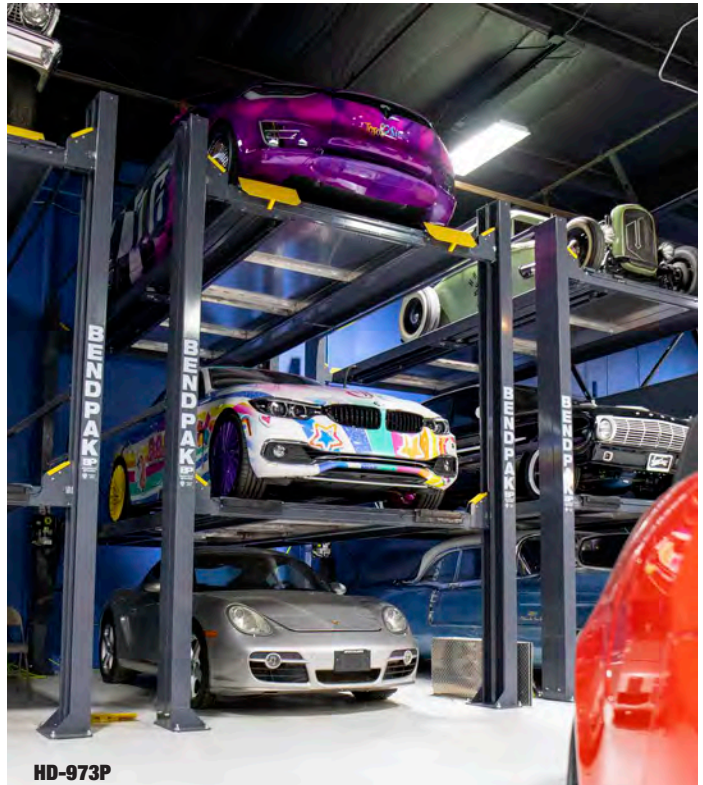


HD-973P

Variability in Specifications and Features: All product specifications and features listed in this catalog are for reference only. For a more accurate and comprehensive listing of product specifications and features, visit www.bendpak.com. The contents of this catalog are subject to change.

Double Your Parking

AGS

#5175274

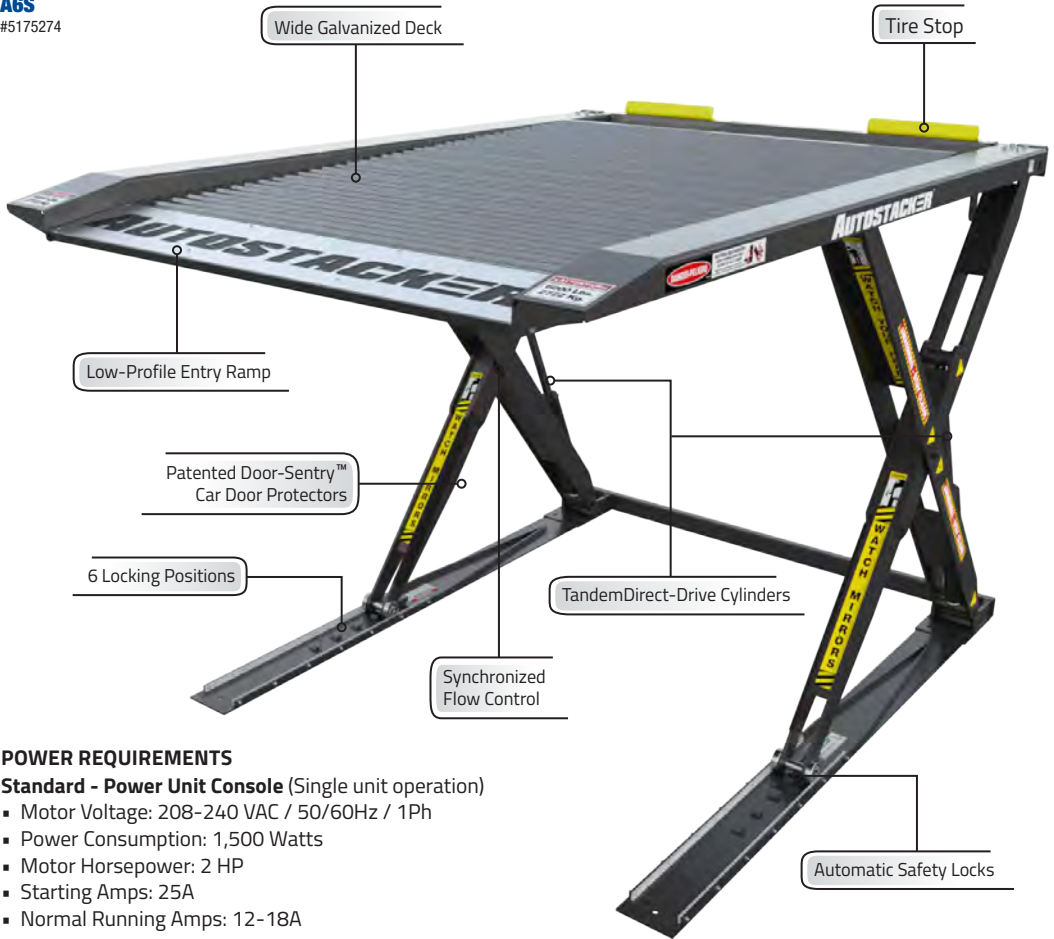

POWER REQUIREMENTS

Standard - Power Unit Console (Single unit operation)

- Motor Voltage: 208-240 VAC / 50/60Hz / 1Ph
- Power Consumption: 1,500 Watts
- Motor Horsepower: 2 HP
- Starting Amps: 25A
- Normal Running Amps: 12-18A

Optional multi-unit power unit console available (Operates up to 14 lifts)



 See it on YouTube

AUTOSTACKER





AUTOSTACKER™



Multi-Platform Parking Lift

SERIES FEATURES:

- 6,000 lbs. capacity per deck
- Perfect for cars, light trucks and ATVs
- Rugged I-beam and C-channel construction
- Wide base plate for maximum stability
- Superstructure features durable powder coat finish
- Dual hydraulic cylinders with heavy-duty steel lifting cable
- Heavy-duty steel construction
- Reliable electric-hydraulic power system
- Features heavy-duty 3/8" aircraft cable
- Rugged 1-1/4" roller axes
- Simple controls
- Full-width platform to keep bottom vehicles protected

PL-6KDT #5175157




PL-6KDTX (Extended) #5175212

Tandem Lift



Variability in Specifications and Features: All product specifications and features listed in this catalog are for reference only. For a more accurate and comprehensive listing of product specifications and features, visit www.bendpak.com. The contents of this catalog are subject to change.



- High-speed lifting
- Oversized sheave diameter reduces cable fatigue
- Multi-position safety locks in each column
- Runways feature non-skid surface
- Independent backup slack-cable safety latches
- Extended Columns for wide-clearance vehicles (PL-6KDTX)

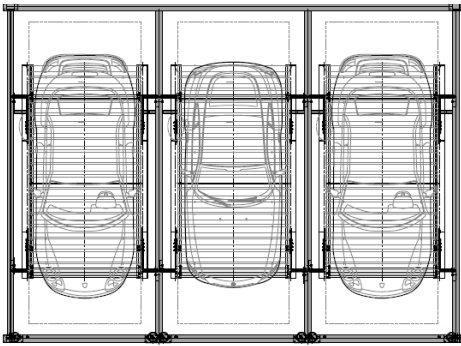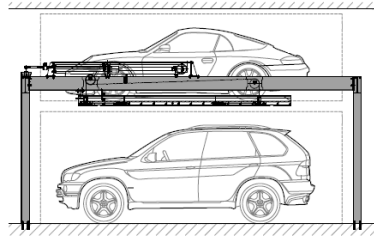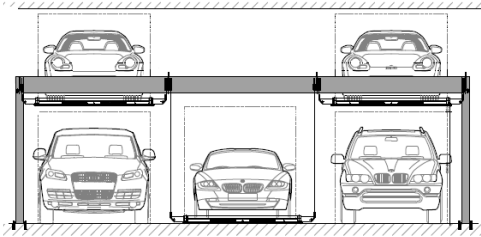

MODEL	PL-6KDT Double	PL-6KDTX Double Extended	PL-6KT Triple
Lifting Capacity / Deck	6,000 lbs.	6,000 lbs.	6,000 lbs.
Overall Width	211"	250"	308"
Overall Length	236.5"	236.5"	236.5"
Platform Width	82"	82"	82"
Length of Platforms	152"	152"	152"
Drive Clearance	93"	93"	93"
Max. Rise	89"	89"	89"

PL-6KT
Triple Deck
Platform Lift
#5175154



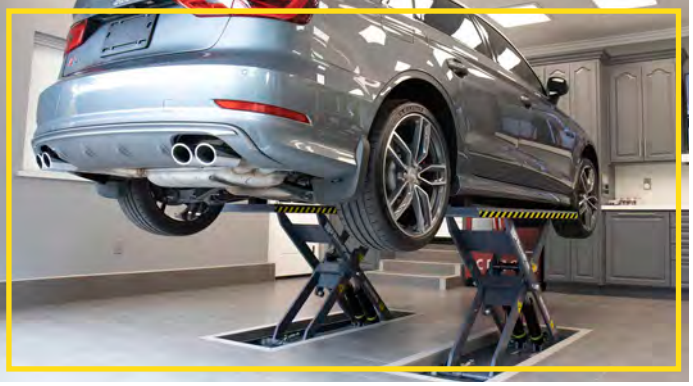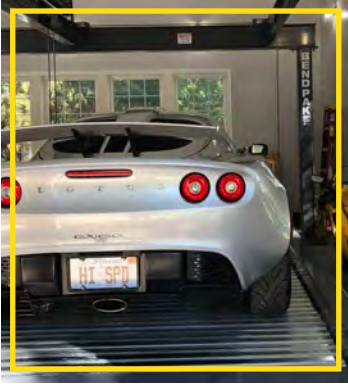

This is my BendPak



***There are many,
But this one's mine.***

*"Our work exceeds our customers' expectations.
My shop reflects a serious attention to detail,
which is why we only use BendPak."*

- Justin Stephens, Master Upholsterer
and Owner of JS Custom Interiors

BP BendPak®

For more information on BendPak's entire product line,
Call 1-800-253-2363 or Visit www.bendpak.com

©2020 BendPak Inc. All rights reserved.

Pipe Benders

SERIES FEATURES:

- 3-1/3" min. bending radius
- 5" max. bending radius
- Canister style hydraulic filter
- 5 Hp / 208 - 230 VAC motor
- Manual or automatic controls
- Drop-in swaging collars
- Twist lock tooling
- ANSI 92.2 Cylinders
- Quick release bending dies
- Bending heads to within .002"
- Bending and end finishing operation
- Adjustable back gate pressure
- 180° bending capacity
- One piece solid steel barrel
- Direct drive high speed 4 GPM pump
- Tool trays
- Large fluid reservoir
- Filtered hydraulic system
- Oil sight gauges
- 1/2" high pressure hose
- Wide variety of tooling available

BB-2-DLX-601 #5115150



Bending Controls - Manual
Clampless Swager - Internal Expander
Deluxe 302 Tooling Package

1302BAS-DLX-601 #5115180



Bending Controls - Semi-Automatic
Clampless Swager - Internal Expander
Deluxe 302 Tooling Package

1302BA-DLX-601 #5115121



Bending Controls - Digital Automatic
Clampless Swager - Internal Expander
Deluxe 302 Tooling Package

BB-2-MET-503 #5115120
BB-2-MET-601 #5115122



Bending Controls - Manual
Clampless Swager - Internal Expander
Deluxe Metric Tooling Package

1302BAS-MET-503 #5115123
1302BAS-MET-601 #5115124




Bending Controls - Semi-Automatic
Clampless Swager - Internal Expander
Deluxe Metric Tooling Package

1302BA-MET-503 #5115126
1302BA-MET-601 #5115127



Bending Controls - Digital Automatic
Clampless Swager - Internal Expander
Deluxe Metric Tooling Package

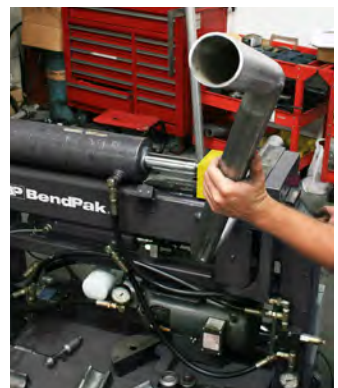

Variability in Specifications and Features: All product specifications and features listed in this catalog are for reference only. For a more accurate and comprehensive listing of product specifications and features, visit www.bendpak.com. The contents of this catalog are subject to change.

ACCESSORIES:



Specialty Tooling
Available Upon Request



300-1 Die Package
#5105570



Rotation Dial
#5215124



BAS Semi-Automatic Controls

BB Series / 1302 Series
Top View



BA Digital Automatic Controls



See it on the BendPak / Ranger YouTube Page

Air Compressors

SERIES FEATURES:

- 80 & 120 Gallon vertical tank
- 4-Cylinder / 2-stage pump
- ASME rated tank
- Electric mag-starter
- Fan-type flywheel
- Fully enclosed belt guard
- Tapered roller bearings
- Forged ductile iron crankshaft
- Corrosion resistant tubing for coolers, separators and valves.
- 100% cast iron Elite pump
- Cast iron cylinders and heads with deep cooling fins
- Forced-air after cooler
- Oil sight gauge
- Automatic pressure switch
- ASME rated overload pressure safety valve
- Pressure gauge with valve
- Oversized replaceable air filters
- Automatic start / stop

5 HP MODEL

TS-580V-601
#5179105



Voltage - 208-230 V / 60 Hz / 1 Ph
Horsepower - 5 Hp
Maximum CFM - 17.2 / 175 psi
Tank - 300L / 80 Gal / Vertical

7.5 HP MODEL

VMX-7580V-601
#5179106



Voltage - 208-230 V / 60 Hz / 1 Ph
Horsepower - 7.5 Hp
Maximum CFM - 26.5 / 175 psi
Tank - 300L / 80 Gal / Vertical

10 HP MODEL

VMX-10120V-603
#5179108



Voltage - 208-230 V / 60 Hz / 3 Ph
Horsepower - 10 Hp
Maximum CFM - 35 / 175 psi
Tank - 454L / 120 Gal / Vertical

CE **ANSI**

Extreme-duty four-cylinder cast iron pump

Electric motor with cooling fan

Protective pulley cover

Air cooling assembly

Elite™ Series
BY BendPak.

The 100% cast iron V-Max Elite pump features splash lubrication for total reliability and a V-4 finned cylinder configuration that provides 360° cooling. Heavy-duty disc-type valves are dependable and accessible without having to remove the cylinder head or perform other complicated valve maintenance procedures. Due to a slower RPM speed and two-stage design, the large V-Max pump puts out a lot of air with little noise. A built-in intercooler and air-cooled aftercooler chill the air, resulting in reduced heat and less moisture from condensation.

Variability in Specifications and Features: All product specifications and features listed in this catalog are for reference only. For a more accurate and comprehensive listing of product specifications and features, visit www.bendpak.com. The contents of this catalog are subject to change.

ACCESSORIES:



Anti-Vibration Pads
#5179402



Air Receiver Tank
#5180215



RS7580V-601 Rotary-Screw Air Compressor #5179100

CE ANSI



- Motor - 208-230 VAC / 50/60 Hz / 1 Ph
- Horsepower - 7.5 Hp
- Tank - 80 Gal / Vertical
- Peak Amp Draw - 38
- Motor RPM: 1,740
- Maximum PSI - 175 psi

STANDARD FEATURES:

- Hush-Quiet operation
- Heavy-duty inlet filter
- ASME rated tank
- Asymmetric rotary screw with oil injection
- Phase protection safety feature
- Spin-on oil separator
- Custom operating parameters
- Emergency stop push button
- Pressure differential meter
- Warnings for all shutdown procedures
- Rotor lock protection
- Short-circuit protection
- Dirty air filter warning
- Low-RPM motor
- Pressure relief valve
- Forced-air aftercooler
- Twin toothed drive belts provide greater durability and more efficient power transmission
- Precision-aligned, high-quality roller bearings designed to withstand the most demanding conditions and extend service life



Power Units

Power Units Explained

Ranger™ AC hydraulic power units are self-contained, dependable sources of hydraulic power that come standard with an abundance of features and benefits in a durable and economic package. These high-quality power units are ideal for industrial AC applications, such as auto lifts, elevated work platforms, scissor lifts, dock levelers, conveyors, packaging machines, machine tools, compactors, crimping machines, presses, robotic equipment, tailgate lifts, dump bodies, cab tilts, emergency backup units, snowplows, log-splitters, harvesting machinery, lift platforms, scaffolds, presses, waste compactors, car lifts, medical field and dental field lifts and more.

E0.8B8F1 Power Unit
#5585315



E1.2B3F1 Power Unit
#5585435



FEATURES:

- UL / ETL Listed (except model E1.2B8F1)
- Vertical Design
- Built-in throttle and buffer valves reduce pre-load pressure
- Integrated fixed-setting pressure relief valve
- Submerged pump
- Spare pressure port
- Multi-hole adapter plate adapts to a wide variety of mounting applications
- Suction-strainer
- Breather and fill-cap

Gal Reservoir - 1.5 / PRV - 1900
Motor - 1.5 HP / 110-230V-50/60-1PH
UL/ETL Listed

Gal Reservoir - 1.5 / PRV - 2500
Motor - 1.5 HP / 110-230V-50/60-1PH
CE Listed

E2.1F3H1 Power Unit
#5585285



F2.1F3H1 Power Unit
#5585280



Gal Reservoir - 3.6 / PRV - 2650
Motor - 2.5 HP / 110-230V-50/60-1PH
UL/ETL Listed

Gal Reservoir - 3.6 / PRV - 2850
Motor - 2.5 HP / 208-230V-50/60-1PH
UL/ETL Listed

F3.2G3H1 Power Unit
#5585325



E3.7K3H2 Power Unit
#5585320




Gal Reservoir - 4.2 / PRV - 2650
Motor - 2.5 HP / 208-230V-50/60-1PH
UL/ETL Listed

Gal Reservoir - 8.6 / PRV - 2400
Motor - 2.5 HP / 208-230V-50/60-1PH
UL/ETL Listed



CHANGE THE WAY YOU CHANGE TIRES

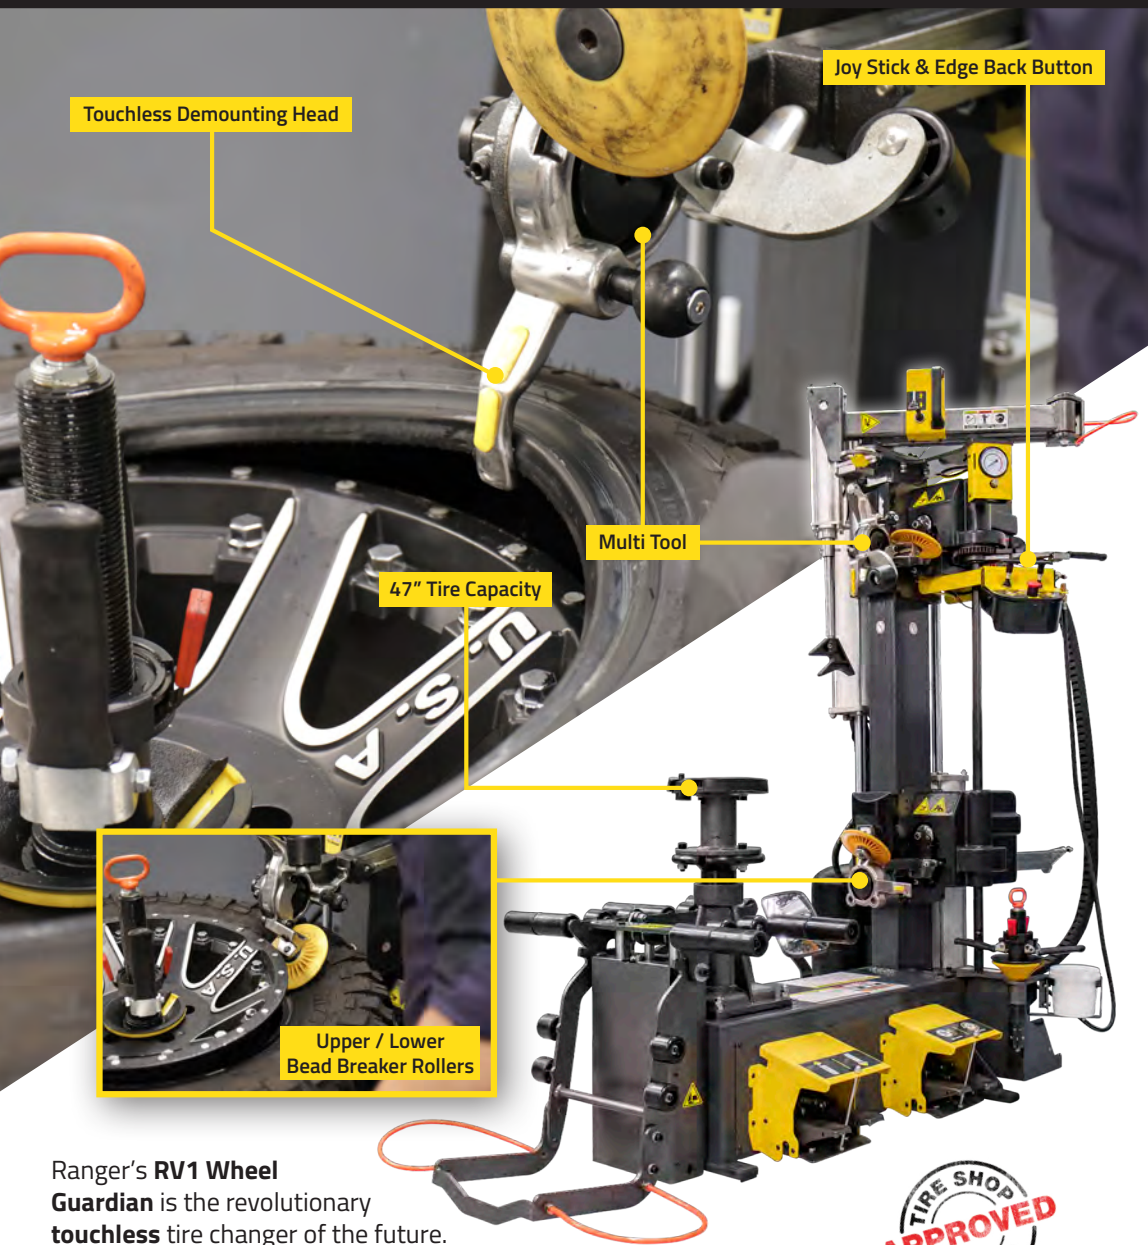

Touchless Demounting Head

Joy Stick & Edge Back Button

Multi Tool

47" Tire Capacity

Upper / Lower
Bead Breaker Rollers

Ranger's **RV1 Wheel Guardian** is the revolutionary **touchless** tire changer of the future. This tire machine breaks beads and swaps tires faster than virtually any other design on the market. Eliminate the manual hassle of changing tires when you go **touchless!**



See next page for Specs

1-800-253-2363 ■ bendpak.com/touchless

© 2020 BendPak Inc. Ranger Products is a registered trademark of BendPak.

Ranger

Tire Changers

Ranger's NextGen™ Tire Changers - Tire Shop Tested™

All NextGen models are loaded with design enhancements that make the technician's job easier. Sturdy frames and hardened-steel horizontal outrigger support arms eliminate flex during all tire service procedures, reducing the chance of damage to expensive wheels. Bead seating and tire inflation is simple and effortless with Ranger's exclusive TurboBlast™ portable bead seating system. High-torque electric turntables, increased speed and reversible direction mean quicker tire removal and installation. Industrial-grade pneumatic control valves feature die cast and machined bodies constructed from zinc and aluminum for increased service life and performance at the highest level possible within almost every imaginable working condition. Important accessories come standard, like a multi-piece plastic wheel protector kit that includes turntable jaw covers, bead-breaker blade boots and specialized mount / demount head covers to help protect delicate wheels.

R745 Swing-Arm Tire Changer

#5140148

VOLTAGE
110VAC



NOTE:
Jet blast
bead seater
NOT INCLUDED

Internal Clamping - 12" - 21"
External Clamping - 10" - 18"
Maximum Tire Diameter - 39"

R76LT Tilt-Back Tire Changer

#5140144

VOLTAGE
220VAC



Internal Clamping - 10" - 30"
External Clamping - 9" - 28"
Maximum Tire Diameter - 43"

R980XR Swing-Arm Tire Changer

#5140146

VOLTAGE
220VAC



Internal Clamping - 10" - 30"
External Clamping - 9" - 28"
Maximum Tire Diameter - 50"

R980AT Swing-Arm Power Assist

#5140147

VOLTAGE
220VAC



Internal Clamping - 10" - 30"
External Clamping - 9" - 28"
Maximum Tire Diameter - 50"

R76ATR Tilt-Back Power Assist


#5140140

VOLTAGE
220VAC



Internal Clamping - 10" - 30"
External Clamping - 9" - 28"
Maximum Tire Diameter - 43"

RimGuard™ Wheel Clamps

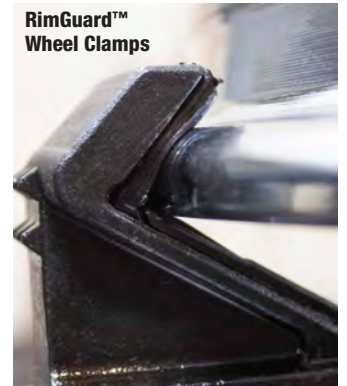

R80EX Dual-Assist Tilt-Back Tire Changer

#5140139

NEW!

VOLTAGE
220VAC



Internal Clamping - 13" - 34"
External Clamping - 10" - 30"
Maximum Tire Diameter - 47"

RV1 Wheel Guardian™ Tire Changer

#5140138

NEW!

VOLTAGE
220VAC



Rim Diameter Range - 13" - 30"
Max. Wheel Width - 15"
Max. Tire Diameter - 47"

R26FLT Super-Duty Truck Tire Changer

#5140137

VOLTAGE
220VAC



Drive System - Electric / Hydraulic
Maximum Rim Diameter - 14" - 26"
Maximum Tire Diameter - 63"

Variability in Specifications and Features: All product specifications and features listed in this catalog are for reference only. For a more accurate and comprehensive listing of product specifications and features, visit www.bendpak.com. The contents of this catalog are subject to change.

ACCESSORIES:



Plastic Duckhead
#5150523



ATV / Motorcycle Duckhead
#5327457



RimGuard™ Wheel Clamps
#5328311



Elevating Clamps
#5327861




RWL-150T Wheel Lift
#5150355

**R76ATR
Tilt-Back
Power Assist
Tire Changer**
#5140140



BEST SELLER!

**ALL RANGER
TIRE
CHANGERS FEATURE:
Polymer & Urethane
RimGuard™ Wheel Clamps**
(Excludes R745)

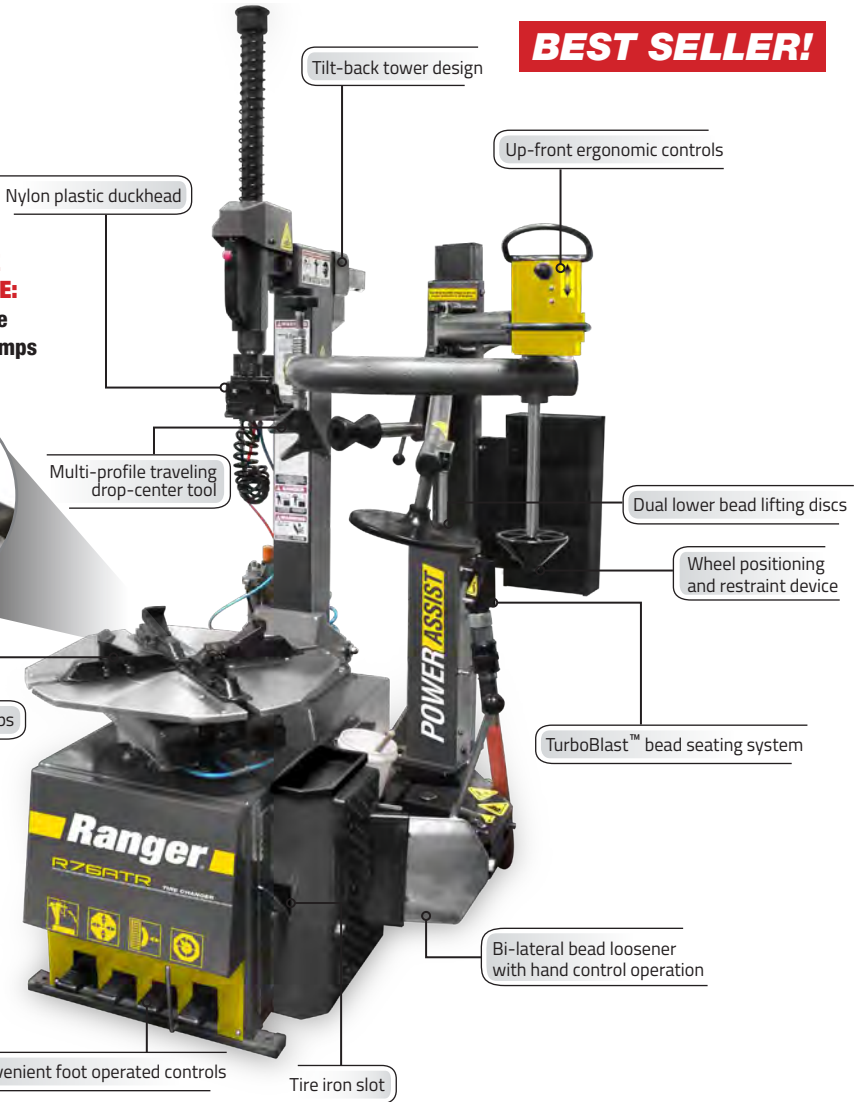

NextGen™ SERIES

See it on the BendPak / Ranger YouTube Page

Wheel Balancers

DST-2420 FEATURES:

- Dynamic, Static and Performance Alloy settings
- Automatic round-off with top-dead-center weight position indicator
- Hardened-steel 36 mm shaft
- Quick-release hub nut
- Multi-user save function

DST-30P FEATURES:

- Ergonomic control board and easy-to-read LED display
- Multi-user save function
- Automatic braking
- Low RPM balancing speed and rapid six-second cycle time
- Self-calibration function

DST-64T FEATURES:

- Precision DataWand™ and inner data arm
- Low RPM balancing speed and rapid six-second cycle time
- Automatic braking
- LED inner wheel target light
- Manual or automatic start
- Self-calibration function

DST-2420
Wheel Balancer
#5140156



DUAL VOLTAGE
110V / 220V

Max. Wheel Diameter - 10" - 30"
Max. Tire Diameter - 47"
Max. Tire Weight - 145 lbs.

DST-30P
Wheel Balancer
#5140154



VOLTAGE
110VAC

Max. Wheel Diameter - 8" - 30"
Max. Tire Diameter - 50"
Max. Tire Weight - 150 lbs.

DST642D
Wheel Balancer
#5140153



VOLTAGE
220VAC

Max. Wheel Diameter - 10" - 30"
Max. Tire Diameter - 50"
Max. Tire Weight - 150 lbs.

DST-64T
Wheel Balancer
3D Quick-Touch™
DataWand™
#5140152



VOLTAGE
220VAC

Max. Wheel Diameter - 10" - 30"
Max. Tire Diameter - 50"
Max. Tire Weight - 150 lbs.

RB24T
Truck Wheel Balancer
#5140149




VOLTAGE
380VAC

Max. Wheel Diameter - 30"
Max. Tire Diameter - 50"
Max. Tire Weight - 400 lbs.



Truck Cone Kit
#5150555



Double-sided centering cone fits hub sizes 4.75" - 6.75"

Motorcycle Shaft Kit
#5150320



Fits DST2420 and DST64T
Includes: Universal wheel clamp, shaft, centering cones, spacers and spin-on nut

Lug Bolt Kit
#5150020



8-pc. kit
Includes: Centering pin adapters, flange plate kit and measuring caliper

Wheel Balancers Features & Specifications

Laser-Spot Balancer

INFORMATION:

The Ranger LS43B wheel balancer handles wheels up to 43 inches in diameter. The average cycle time is just 7 seconds, making it one of the fastest and most reliable balancing machines ever built. The standout feature on this model, of course, is Ranger's exclusive 3D Quick-Touch™ Laser-Spot™ technology that highlights the pinpoint location at which operators should place the minimal amount of weight in order to achieve a perfect balance at the 6 o'clock position. Only a single weight placement should be necessary for most wheel and tire configurations.

LS43B FEATURES:

- Dynamic, Static and Performance Alloy settings
- Low RPM balancing speed and rapid six-second cycle time
- Manual or automatic start when hood is lowered
- Self-calibration function
- Automatic braking

LS43B Wheel Balancer 3D Quick-Touch™ Laser-Spot™

#5140151

Max. Wheel Diameter - 10" - 30"
Max. Tire Diameter - 47"
Max. Tire Weight - 145 lbs.



LED Wheel Weight Displays

DataWand™ for Automatic
Wheel Data Entry

Includes FREE Wheel
Weight Starter Kit

User-Friendly Operation

INCLUDES TOOLING KIT



OPTIONAL Clip-On Steel Wheel Weights

Sold separately



25 ea.

0.25oz, 0.50oz, 0.75oz, 1oz, 1.25oz, 1.5oz,
1.75oz, 2oz, 2.25oz, 2.5oz, 2.75oz, 3oz

Laser-Spot™ Technology



Brake Lathes

RL-8500XLT FEATURES:

- Dynamic, Static and Performance Alloy settings
- Automatic round-off with top-dead-center weight position indicator
- Hardened-steel 36 mm shaft
- Quick-release hub nut
- Multi-user save function

Truck Adapter Set

- Ergonomic control board and easy-to-read LED display
- Multi-user save function
- Automatic braking
- Low RPM balancing speed and rapid six-second cycle time
- Self-calibration function

Optional Truck Adapter Kit

- Precision DataWand™ and inner data arm
- Low RPM balancing speed and rapid six-second cycle time
- Automatic braking
- LED inner wheel target light
- Manual or automatic start
- Self-calibration function

RL-8500XLT Combination Brake Lathe Package Super-Duty

#5150080



Max. Rotor Thickness - 2.5"
Max. Rotor Diameter - 17"
Max. Drum Diameter - 28"

Light & Medium Truck Adapter Set

#5150171



A) Small Truck Cone - 4.125" x 5.25"
B) Large Truck Cone - 5.125" x 6.25"
C) Truck Plate - 7.40" OD

Brake Lathe Truck Adapter Kit


#5150161



Fully Equipped Multi-Piece Set
Accommodates Medium & Full Size Trucks

RL-8500 Combination Brake Lathe Package

#5150066

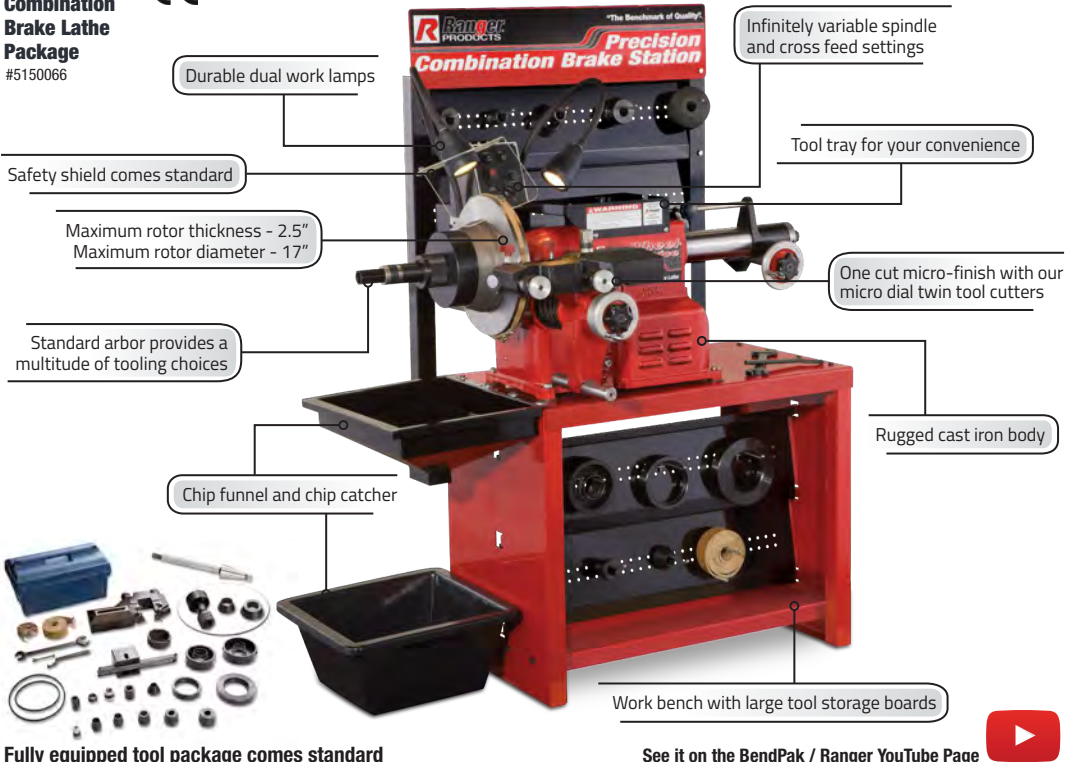

Fully equipped tool package comes standard

See it on the BendPak / Ranger YouTube Page



Wheel Aligner

3DP4100R FEATURES:

- User-Friendly and Time Saving Features
- Self-balancing, variable height camera lift system is built with precision bearing slides for easy adjustment
- High-resolution drive-on approach camera provides full on-screen frontal view of vehicle driving on lift platforms
- Commercial-grade cameras are designed with full frame optical lenses that ensure accuracy and stability




3DP4100R
Target 3D Pro™
3D Imaging
Wheel Aligner
 #5140101



FREE SET-UP & ON-SITE TRAINING



Power Requirements:
 115 VAC, 1Ph, 50/60 Hz, 8 amp
 230 VAC, 1Ph, 50/60 Hz, 8 amp

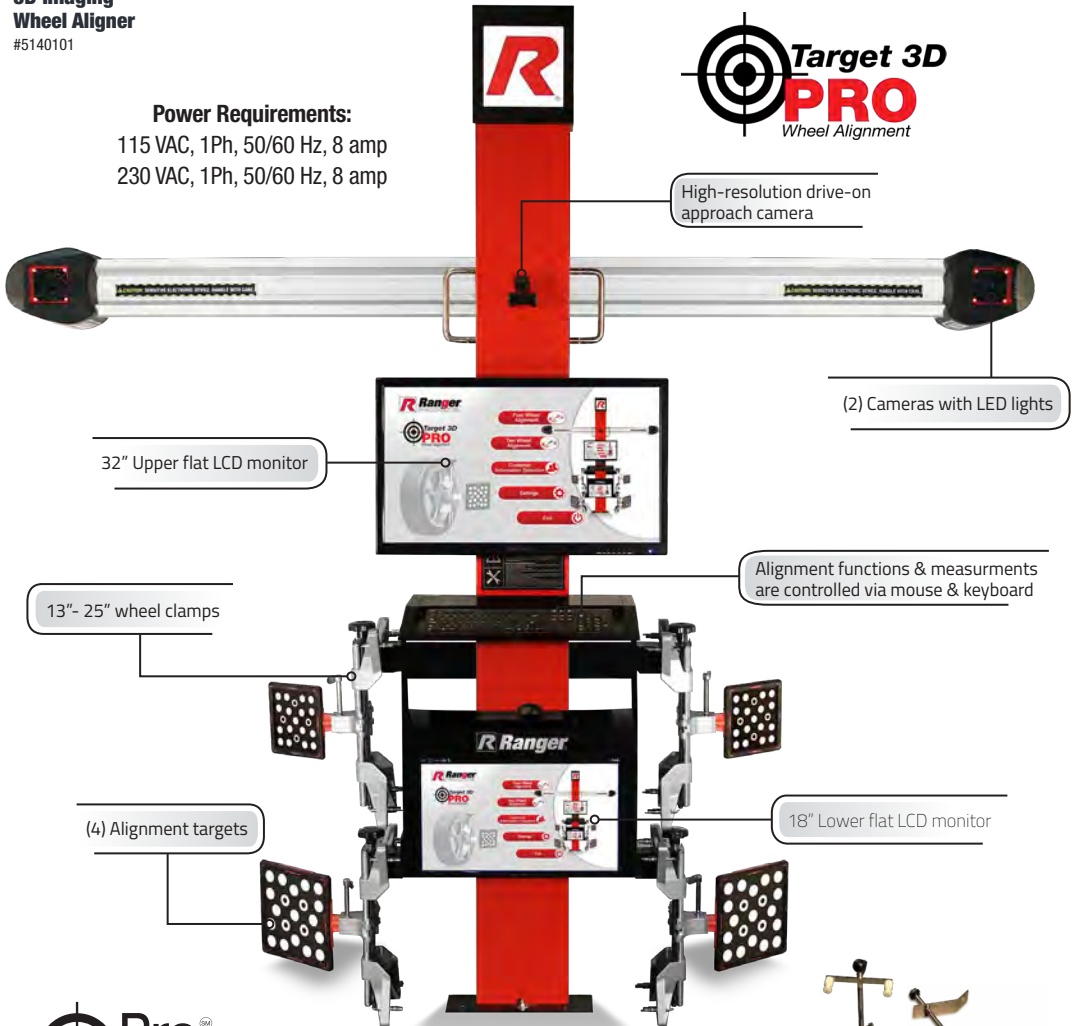

INCLUDES:

- Steering wheel lock
- Brake pedal depressor



Jacks & Lifting

INFORMATION:

Ranger's wide array of multi-purpose floor jacks just keeps getting larger and more diverse. Our floor jacks have maximum capacities ranging from 3,000 to 60,000 lbs. and come in a variety of styles, like quick-pump and low-profile. No matter which one you choose, Ranger floor jacks offer incredible lifting power and top-notch construction that you can count on to never let you down. Our impressive line of floor jacks is carefully designed to accommodate a wide spectrum of weight capacities and lifting applications, easily lifting just about anything that needs service.

RFJ-3000AL
1.5 Ton Aluminum
Racing Floor Jack

#5150061



Capacity - 3,000 lbs.
Height - 3.5" - 17.5"
Chassis Length - 24"

RFJ-3000LPF
1.5 Ton Super-Long
Floor Jack

#5150060



Capacity - 3,000 lbs.
Height - 2.75" - 24"
Chassis Length - 34"

RFJ-4000AL
2 Ton Aluminum
Racing Floor Jack

#5150085



Capacity - 4,000 lbs.
Height - 3.5" - 17.75"
Chassis Length - 24"

RFJ-2TX
2 Ton
Long Reach
Floor Jack

#5150058



Capacity - 4,000 lbs.
Height - 3.5" - 31.5"
Chassis Length - 37"

RFJ-5000HD
2.5 Ton Heavy-Duty
Commercial Grade
Floor Jack

#5150056



Capacity - 5,000 lbs.
Height - 3" - 20"
Chassis Length - 26"



RFJ-3000LPF

RFJ-3TP
3 Ton Professional
Floor Jack

#5150440



Capacity - 6,000 lbs.
Height - 5.25" - 19.25"
Chassis Length - 26"

RFJ-3T
3 Ton Racing Style
Floor Jack / Plunger-U-Joint

#5150414



Capacity - 6,000 lbs.
Height - 4.75" - 20.5"
Chassis Length - 28"

RFJ-3TQP
3 Ton Quick-Pump
Floor Jack

#5150418



Capacity - 6,000 lbs.
Height - 5" - 19.75"
Chassis Length - 25.5"

Variability in Specifications and Features: All product specifications and features listed in this catalog are for reference only. For a more accurate and comprehensive listing of product specifications and features, visit www.bendpak.com. The contents of this catalog are subject to change.

GALLERY:



RFJ-6HD
3 Ton "Low Rider"
Floor Jack

#5150446



Capacity - 6,000 lbs.
Height - 3.625" - 21"
Chassis Length - 27"

RFJ-10TL
10 Ton Long Frame
Floor Jack

#5150434



Capacity - 20,000 lbs.
Height - 7" - 23"
Chassis Length - 61"

RFJ-30TL
30 Ton Telescoping
Air Bottle Jack

#5150443



Capacity 1st Stage - 60,000 lbs.
Capacity 2nd Stage - 30,000 lbs.
Height - 6.5" - 12" / Chassis Length - 22.5"

RTJ-1100
1/2 Ton
Transmission
Jack

#5150442



Capacity - 1,100 lbs.
Height - 45" - 72"
Base - 24" x 24"

RTJ-1
1 Ton
Transmission
Jack

#5150404



The original
TransJak

Capacity 1st Stage - 2,000 lbs.
Capacity 2nd Stage - 1,000 lbs.
Height - 37" - 73" / Base - 39" x 39"

RTJ-3000
1.5 Ton
Transmission
Jack

#5150406



Capacity 1st Stage - 3,000 lbs.
Capacity 2nd Stage - 2,000 lbs.
Height - 35.5" - 71.5" / Base - 34" x 34"



RFJ-4000AL

Jacks & Lifting

SERIES FEATURES:

- Welded steel construction for maximum durability
- Safety ratchet design ensures stands remain locked under load
- Perfect for holding drive-train or exhaust components in position
- Sold in pairs
- Quick-adjust spin handle with thrust bearing
- Wide base provides maximum stability
- Thick, rubber adjustable pad for maximum support
- Convenient handle and column release
- Hardened ACME screw for easy adjustment
- Tripod design evenly distributes weight
- Pneumatically operated wheel lift
- One-handed lever control
- Heavy-duty steel casters
- Bearing mounted slider
- Stabilizes vehicles raised on lifts
- Heavy-steel construction for maximum durability

RJS-3T 3 Ton Jack Stands (Set of 2)

#5150115



Holding Capacity - 6,000 lbs.
Height - 11.5" - 17"
Base Dimensions - 7" x 7.5"

RJS-6T 6 Ton Jack Stands (Set of 2)

#5150120



Holding Capacity - 12,000 lbs.
Height - 15.5" - 24.5"
Base Dimensions - 9" x 10.5"



RJS-3T

RJS-1T High Reach Jack Stand

#5150183



Holding Capacity - 1,650 lbs.
Height - 54.5" - 80.5"
Base Dimensions - 12"

RJS-1TF High Reach Jack Stand Foot Operated

#5150185



Holding Capacity - 1,650 lbs.
Height - 54.5" - 80.5"
Base Dimensions - 12"

RJS-2TH Tripod Jack Stand

#5150125



Holding Capacity - 4,000 lbs.
Height - 55" - 87"
Base Dimensions - 24" x 24"

MLS-18 Mobile Jack Stand

#5175001



Holding Capacity - 18,000 lbs.
Height - 48.75" - 74.5"
Base Dimensions - 32"

RWL-150T Pneumatic Wheel Lift

#5150355



Fits R980XR & R980AT

Lifting Capacity - 150 lbs.
Pneumatic Operation
Welded Steel Construction



RWL-150T

Lifting Features & Specifications

Motorcycle Lifts

SERIES FEATURES:

- Constructed out of 12-gauge steel
- Pneumatic lifting cylinder
- Durable powder coat finish
- Adjustable front wheel vise
- Drop-away rear wheel deck
- Easy ramp(s) removal
- Front and side extensions standard
- Built-in retractable swivel casters
- Full travel automatic safety locks
- Single hydraulic lifting cylinder
- Side decks can be easily removed
- Diamond-plate approach ramps
- Air or hydraulic pump operation
- Multiple locking positions



RML-600XL Motorcycle Lift

#5150575



RML-1500XL Extended Motorcycle Lift

#5150605



RML-1100 Motorcycle Jack

#5150071



Lifting Capacity - 1,000 lbs.

Height - 7"- 31.5" / Table Width - 24"- 44"

Table Length - 79"- 98"

Lifting Capacity - 1,500 lbs.

Height - 7.5"- 45" / Table Width - 30"- 53"


Table Length - 89"- 102"

Lifting Capacity - 1,100 lbs.

Height - 3.5"- 16"

Top Dimensions - 6"- 17.75"

RML-1500XL

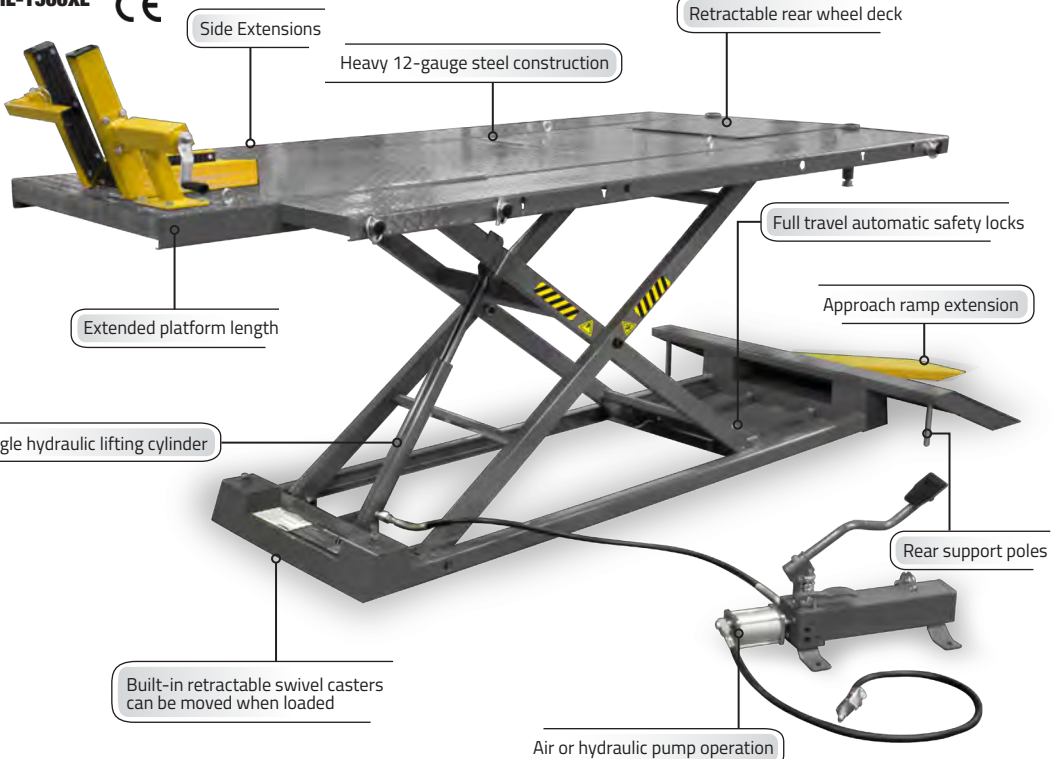

Shop Equipment

INFORMATION:

Let Ranger Products lighten the load with our considerable line of high-quality rolling equipment. All Ranger Carts and Dollies are made from high-gauge steel and employ only the best casters for easy maneuvering. Our service carts, chassis-mount vehicle dollies, low-profile automobile carts and rolling adjustable work tables come fully equipped to make your day in the garage infinitely easier. Don't lift or carry—roll with Ranger!

Ranger's industrial shop presses offer you the versatility of professional-grade hydraulic force, whether you're at the shop or in your own garage. Among other operations, all Ranger Hydraulic Presses are ideal for the removal and installation of gears, bushings and bearings—so you can bend, straighten, flatten, crush, press, shape, push, pull, lift and spread like you were born doing it.

RCD-1TD
Wheel Dolly
Auto Carts
#5150190



Capacity - 1,000 lbs. (Each)
Dimensions - 15.5" x 23.5"
3.5" Cast Iron Ball Bearing Casters

RCD-2V
4,400-lb. Capacity
Vehicle Dolly
#5150409



Lifting Capacity - 4,400 lbs. (Each)
Overall Height - 10"
Caster Size - 4.5"

RP-20T
Bottle Jack
Shop Press
#5150496



Capacity - 40,000 lbs.
Cylinder Stroke - 8"
Width - 23" / Height - 59"

RCD-1500
GoCart™
Vehicle Dolly
#5150595



(Sold as Pair)

Load Rating Each - 1,500 lbs.
Tire Width Capacity - 12"
Tire Diameter Capacity - 15" - 28"

RCD-1500EX
GoCart™
Vehicle Dolly
Extended
#5150191



(Sold as Pair)

Load Rating Each - 1,500 lbs.
Tire Width Capacity - 13"
Tire Diameter Capacity - 19" - 39"

RP-20HD
Hydraulic
Shop Press
#5150059




Capacity - 40,000 lbs.
Cylinder Stroke - 5.5"
Width - 37" / Height - 60.25"

GoCart™
Storage Rack
#5150600



Load Rating - 200 lbs.
Dimensions - 19" x 31" x 9"
Holds up to 4 GoCart™ Dollies

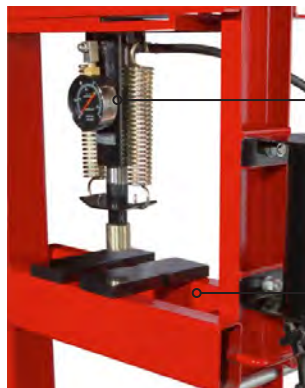

Integrated 4" diameter
20-ton pressure gauge

Hydraulic cylinder moves laterally

Adjustable table height

RP-20HD

Variability in Specifications and Features: All product specifications and features listed in this catalog are for reference only. For a more accurate and comprehensive listing of product specifications and features, visit www.bendpak.com. The contents of this catalog are subject to change.

RWB-2D FEATURES:

- Electrostatic triple-baked protective powder coat
- Rolled edges for added strength and rigidity
- Full-extension ball bearing drawer slides
- Tumbler key-lock pivot drawer latching system

RWB-2S FEATURES:

- Glossy red finish
- Electrostatic oven-baked powder coat
- Rolled edges for added strength and rigidity
- 5/32" HD rolled edge steel table top
- 3/32" HD rolled edge steel shelves
- 12-gauge construction

RWB-1TD FEATURES:

- Lockable heavy-duty drawer
- 500-lb. working capacity
- Heavy-duty 4" casters
- Adjustable working height
- Removable polyethylene fluid drain
- 14-gauge table top
- 3/4" liquid containing rim

RWB-2D
2-Drawer Work Bench
#5145330



Height - 34.5"
Width - 59"
Depth - 25.25"

RWB-2S
2-Shelf Work Bench
#5145335



Height - 34.5"
Width - 79"
Depth - 25.25"

RWB-1TD
Work Bench w/Fluid Catcher
#5145336





Height - 40"
Width - 48"
Depth - 32"

RH-50PL
Hose Reel
#5150211



Air Pressure - 300 psi
Hose Length - 50'
Fittings - 3/8"

Anti-lock out ratchet mechanism prevents reel from locking up when hose is fully extended

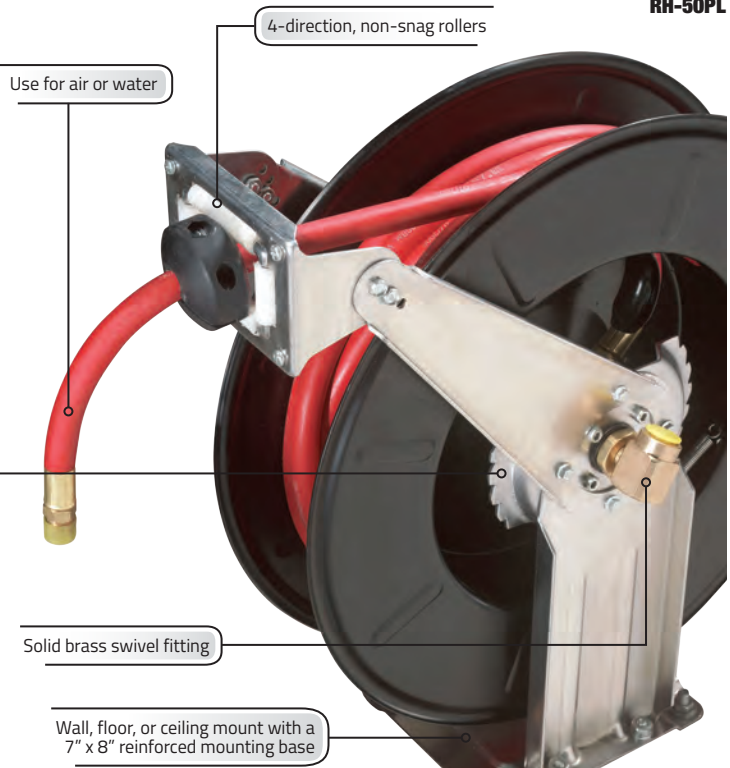

RH-50PL

Shop Equipment

SERIES FEATURES:

Oil Drains

- Lightweight for easy portability
- Safe and easy to use
- Non-corrosive telescoping tube
- Heavy-duty stainless steel clamp
- Built-in hand grips
- Durable steel construction

- Tough construction will resist dents, rust, and corrosion
- Rugged funnel with built-in contamination screen

Oil Filter Crushers

- Reduces cans up to 20%
- Reduces filters up to 25%

- Crushes cans in only 15 seconds
- 100% air operated
- Fulfills EPA and other mandated environmental standards
- Removes up to 95% of the oil
- Compact floor or bench-mount design
- All-steel industrial construction

RD-9G
9-Gallon
Oil Drain
#5150997



Capacity - 9 gal.
Height - 32" - 64"
Funnel Diameter - 18"

RD-18G
18-Gallon
Oil Drain
with Pump
#5150995



Capacity - 18 gal.
Height - 56" - 72"
Evacuation Pump

RD-15
15-Gallon
Low-Profile
Oil Drain
#5150206



Capacity - 15 gal.
Height - 8.5"
Shipping Weight - 43 lbs.

RD-20SE
20-Gallon
Air-Evac
Oil Drain
#5150996



Capacity - 20 gal.
Height - 52" - 83"
Funnel Diameter - 16"

RP-20FC
Oil Filter
Crusher
with Stand
#5150067



(Barrel not included)

Capacity - 10 Ton / Cycle Time - 15 - 20 sec.
Air Requirements - 125 - 175 psi
Dimensions - 29.5" x 17" x 17"

RP-30FCH
Electric / Hydraulic
Oil Filter Crusher
with Stand
#5150008



Capacity - 15 Ton / Cycle Time - 8 - 15 sec.
Power Supply - 208-240V / 50/60Hz / 1 Ph
Dimensions - 75" x 42.5" x 17"

RP-50FC
Heavy-Duty
Oil Filter
Crusher
with Stand
#5150401



(Barrel not included)

Capacity - 25 Ton / Cycle Time - 8 - 15 sec.
Power Supply - 208-230V / 50/60Hz / 1 Ph
Dimensions - 90" x 32.5" x 31.5"



See it on the BendPak / Ranger YouTube Page

Variability in Specifications and Features: All product specifications and features listed in this catalog are for reference only. For a more accurate and comprehensive listing of product specifications and features, visit www.bendpak.com. The contents of this catalog are subject to change.

RS-500D / RS-750D FEATURES:

- Heavy-duty steel construction
- Removable tank screen
- Stainless oil skimmer
- Removable parts tree
- Powder coat finish
- Brass nozzles
- Full opening octagonal door
- Large drain pipe
- Heavy-duty rubber casters
- Friction-drive turntable system
- Gasket-free door
- Small parts basket
- Stainless steel handles
- FREE bucket of soap included

SOAP FEATURES:

- Non-foaming soap
- Low pH
- Mild alkali
- Water soluble
- Specially formulated
- Removes grease, oil, stains, carbon, protein and some paints

**RS-500D
Spray
Wash
Cabinet**
#5155117



**FREE 20-lb.
Soap Bucket**



Load Capacity - 500 lbs.
Tank Capacity - 50 gal.
Interior Dimensions - 43" x 32"

**RS-750D
Spray
Wash
Cabinet
(Truck)**
#5155118



**FREE 20-lb.
Soap Bucket**



Load Capacity - 1,000 lbs.
Tank Capacity - 53 gal.
Interior Dimensions - 32" x 54"

Aluma-Klean Detergent
20 lbs. #5155096
50 lbs. #5155100



Low pH
Water soluble
Non foaming soap

**STAINLESS
STEEL OPTION
AVAILABLE**



Removable tank screen and parts tree inside

Automatic timer and safety door switch

Automatic low water shutoff

Quick-release door latch

Stainless oil skimming system

Heavy-duty rubber casters

Friction-drive turntable system

Dual water heaters for quick startup

Built-in tank drain



See it on the BendPak / Ranger YouTube Page

Shop Equipment

RWS-1B FEATURES:

Bubble Balancer

- Rugged die-cast aluminum head cone
- Easy to use self-leveling stand
- Built-in weight-storage compartments
- Self-aligning, spring-loaded cone
- Hardened cast pivot seat
- Recessed circular level bubble

RWS-1B Bubble Wheel Balancer

#5156100



Hub Hole Diameter - 1.5" - 4.5"
Calibrated at - 90°- 180°- 270°- 360°
Width - 12" / Height - 23"

RST-WS Features

Rolling Work Seat

- Padded seat
- Swivel casters for easy maneuverability
- Relieves sore back muscles
- Work more efficiently
- Sturdy steel tubing construction
- Low profile design

RST-1WS Rolling Work Seat

#5150514



Steel Tubing - 1"
Swivel Casters - 2.5"
Relieves sore back muscles

CB-30L FEATURES:

Portable Evaporative Air Cooler

- Micro-computer programmed control panel with LCD display
- Automatic swing-louvers
- Direct-drive fan
- Convenient remote control
- 3-speed airflow wind speed

CB-30L Portable Evaporative Air Cooler

#5150551



Optional
208-240V
Model
CB-30H
#5150552



Fan Diameter - 30"
Max. Airflow - 10595 CFM
Power Supply - 115V / 60Hz / 1 Ph

RWS-3TC Manual Tire Changer


#5150400



Tire Capacity - 8" - 7.5" x 16"
Wheel Plate Diameter - 7.5"
Base Dimensions - 15" x 18"

COOL BOSS™

- Dimensions: 44"W x 59"H x 28.5"D
- Cooling Area: 2,000 - 2,500 sq. ft.
- Water Consumption: 2.65 - 3.96 Gal/Hr
- Water Capacity: 16 Gal

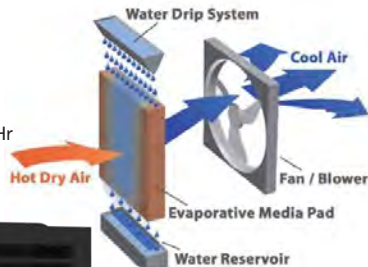

Evaporative Media Pad

30" massive fan

Oscillating swing-louvers

Solid casters



Clip-On Steel Wheel Weights



0.25oz, 0.75oz, 1oz, 1.25oz, 1.5oz, 1.75oz,
2oz, 2.25oz, 2.5oz, 2.75oz, 3oz
Qty. - 25 ea.

Variability in Specifications and Features: All product specifications and features listed in this catalog are for reference only. For a more accurate and comprehensive listing of product specifications and features, visit www.bendpak.com. The contents of this catalog are subject to change.

RST-500ES FEATURES:

- Adjusts to fit all vehicles
- Rubber foot pads to hold load securely
- Straddles inner fender wells
- Precisely positions engine for easy gear box and transmission removal
- Perfect for 4 and 6 cylinder engines
- Folds upright to conserve space

RES-1TF Features

- Heavy steel construction
- Long rubber-grip handle
- Head swivels 360° for easy positioning
- Heavy-duty swivel casters
- Slotted adjustable saddle permits quick and easy installation
- Neck is reinforced for extra strength

RSC-2TF FEATURES:

- Designed for shops with limited space
- Folds for easy storage
- Heavy-duty steel casters
- Neck is reinforced for extra strength
- Wide base for maximum stability
- Telescoping boom provides 4 positions
- Heavy steel construction

RST-500ES Engine Support

#5150103



Holding Capacity - 1,500 lbs.
Screw Travel - 13"
Adjustable Width - 40" - 63"

RES-1TF Engine Stand

#5150470



Holding Capacity - 2,000 lbs.
Front Width - 31" / Rear Width - 27.5"
Height - 37.5" / Length - 41"

RSC-2TF Folding Shop Crane

#5150105



Boom Length - 40" - 63"
Boom Capacity - 1,100 - 4,400 lbs.
Boom Height - 80" - 93"

RIC-4716 Inflation Cage

#5150315



Max Tire Width - 16"
Max Tire Diameter - 47"
Solid-steel welded-steel base

A/C Recovery Machine

#5150025

NEW!



Refrigerant: R134a
Car, truck, SUV and bus compatibility
Tank Capacity - 50 lbs.

AC-134A

A/C Pressure adjustment

Electric database

Flushing function for rapid discharge of used coolant

R134a Refrigerant

Meets UL 1963 & SAE J2788 Standards

Automatic oil discharge




CoolCharge

Manufacturing Superiority

Medium and Heavy-Duty Products

BendPak recognizes the manufacturing process as our moment of maximum influence. When we ship a piece of equipment, we need to know that the product that left our manufacturing complex was the best it could be. That's why we demand nothing short of the very finest in facilities and machinery. Our primary factory houses development and manufacturing for medium and heavy-duty lifting products and wheel service models. At just over 300,000 square ft., it's designed for maximum efficiency and safety. Plus, we consistently employ the best steel fabrication techniques in the world.

Main Production Facility

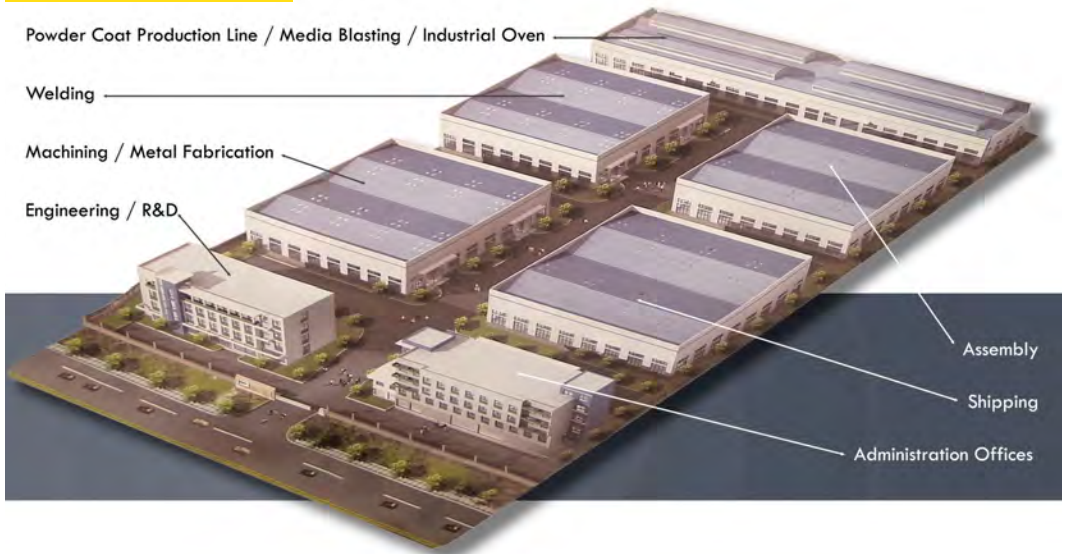

Light and Medium-Duty Products

BendPak's second mega-sized manufacturing is used primarily for manufacturing light and medium-duty lift products, select parking systems and select vehicle repair tools and equipment. The multiplex factory houses state-of-the-art equipment including, numerically-controlled turning and milling equipment and automated welding systems, as well as full-capability services like comprehensive metallurgy testing, heat treatment, automated powder coating and other specialty operations. The facility also houses assembly and packaging operation centers and product development testing labs for BendPak's growing customer base around the globe.



Variability in Specifications and Features: All product specifications and features listed in this catalog are for reference only. For a more accurate and comprehensive listing of product specifications and features, visit www.bendpak.com. The contents of this catalog are subject to change.

Safe Practices are Best Practices

Our multi-department manufacturing complexes have allowed us to expand machinery and employees and triple our daily production capacity. All BendPak employees are Q.C. trained and follow rigid ISO-9001 guidelines. Every day, more than 700 employees around the world dedicate themselves to putting our core values into action. Safety is first—it's our company's top priority, followed closely by environmental responsibility, cost-efficiency, quality, customer service and accountability for all departments. These principles guide our highly skilled workforce toward BendPak's unified vision.



Across the globe, BendPak's facilities encompass over 600,000 sq. ft. in total and consist of vertically integrated manufacturing, operations and logistics facilities. Each location follows strict guidelines as outlined by ISO-9000, further supporting our position as a premier global manufacturer. At BendPak, we ensure that our offshore manufacturing is no different in approach, standards, quality, inspection or packaging from our domestic production. These facilities are audited year-round and undergo systematic evaluation of documented quality programs such as TUV, ANSI/ALI ALCTV, CSA, UL and AS/NZS 1418.9. The programs themselves are audited quarterly, regardless of the facility location, to ensure continued compliance with all applicable standards.



BendPak, Ranger Products and BendPak / Ranger related marks are trademarks and/or registered trademarks of BendPak Inc.



BP BendPak®

Ranger® AUTOSTACKER™ JACKPAK™

GRANDPRIX™ COOL BOSS™ CoolCharge

1645 Lemonwood Drive • Santa Paula, CA USA 93060
Tel: 1-800-253-2363 • www.bendpak.com