



10,000-lb. Capacity, Asymmetric Clearfloor, Adjustable Width, Screw Pads

Questions? Contact a BendPak Product Specialist!
 sales@bendpak.com | 1-800-253-2363
 Monday - Friday, 7AM to 4:30PM PST

SKU#	Model	Description
5175397	XPR-10AS	Asymmetric Clearfloor
5175398	XPR-10AS-LP	+ Low-Profile Arms
5175401	XPR-10AS-168	+ 168" Overall Height
5175402	XPR-10AS-168-LP	+ 168" OAH / Low-Profile

XPR-10AS Two-Post Lift Protects Vehicles and Makes Lifting Easy

Every XPR-10AS features Direct-Drive technology that's only available with BendPak. The asymmetrical design of this lift has rotated columns, which makes it easier to enter and exit the vehicle and reduces the chance of door dings.

A 10K capacity BendPak car lift is a smart addition to any shop or garage. Professionals love the power and reliability of the lift, and they know our reputation precedes us. Meanwhile, DIY'ers with high ceilings know BendPak means safe lifting in the comfort of home. Skip the headache of an uncertified, poorly welded piece of garbage and trust our best to lift your best.

Our XPR-10AS asymmetric two-post lift offers the convenience of wide or narrow installation, all in one configurable package. This durable, safe and reliable car lift features expandable top beam and Tru-Metric arms to suit virtually every vehicle lifting requirement. The simple yet highly sophisticated lift design keeps service and maintenance costs to a minimum, delivering lower operating expenses and higher productivity. These true asymmetric lifts feature 30° rotated columns for added door-opening clearance and interior car access. The exclusive Tru-Metric carriage and arm design combines to give users the ability to load vehicles either symmetrically (centerline of vehicle at column) or asymmetrically (centerline of vehicle behind column).

All asymmetric models features rotated columns for added clearance when opening vehicle doors. At the same time, swing-away arms provide a larger drive-thru clearance. These models feature the exclusive Tru-Metric arm design to provide variable arm-position configurations—either symmetric or asymmetric, providing greater versatility for greater service capability. It's like having two car lifts in one!




Features

- Wide or narrow drive-thru configuration
- Telescoping screw pads offer increased versatility
- Added overhead safety shutoff bar
- Tru-Metric™ arm design for versatile arm positions
- 30° rotated single-piece columns
- Single-point safety release
- Drop-end arms provide a lower pad height
- Dual hydraulic direct-drive cylinders
- Oversized 53" tall carriage for superior strength
- Electric / hydraulic power system
- Automatic arm restraints
- Heavy-duty 1/2" aircraft-quality equalizer cables
- Oversized cable sheave reduces cable fatigue
- 4-piece 63 mm stackable adapter set included
- Triple-telescoping arm design
- Versatile drop-in contact pads with stackable adapter pins
- ETL Approved

SPECIFICATIONS

BP BendPak

Model	XPR-10AS
Style	Asymmetric
Lifting Capacity	10,000 lbs. (4,536 kg)
A - Rise	69" (1,753 mm)
B - Rise + Pad Only	73" (1,854 mm)
C - Max. Lifting Height	79" (2,007 mm)
D - Min. Height + Pad	4" (102 mm)
E - Height Overall (*)	145" (3,683 mm)
F - Width Overall	137" (3,480 mm) or 145" (3,683 mm)
G - Outside Columns	133.25" (3,386 mm) or 141.25" (3,590 mm)
H - Inside Columns	106.25" (2,700 mm) or 114.25" (2,903 mm)
I - Drive-Thru Clearance	93.75" (2,382 mm) or 101.75" (2,585 mm)
J - Floor to Top Switch (*)	141" (3,581 mm)
K - Front Arm Reach (MIN)	23.5" (595 mm)
K - Front Arm Reach (MAX)	43.75" (1,110 mm)
L - Rear Arm Reach (MIN)	40.25" (1,024 mm)
L - Rear Arm Reach (MAX)	58" (1,474 mm)
Screw Pad Adjustment	2" (51 mm)
Max. Load per Arm	2,500 lbs. (1,134 kg)
Time to Full Rise	45 seconds
Noise	45 dB
Motor (**)	220 VAC / 60 Hz / 1 Ph

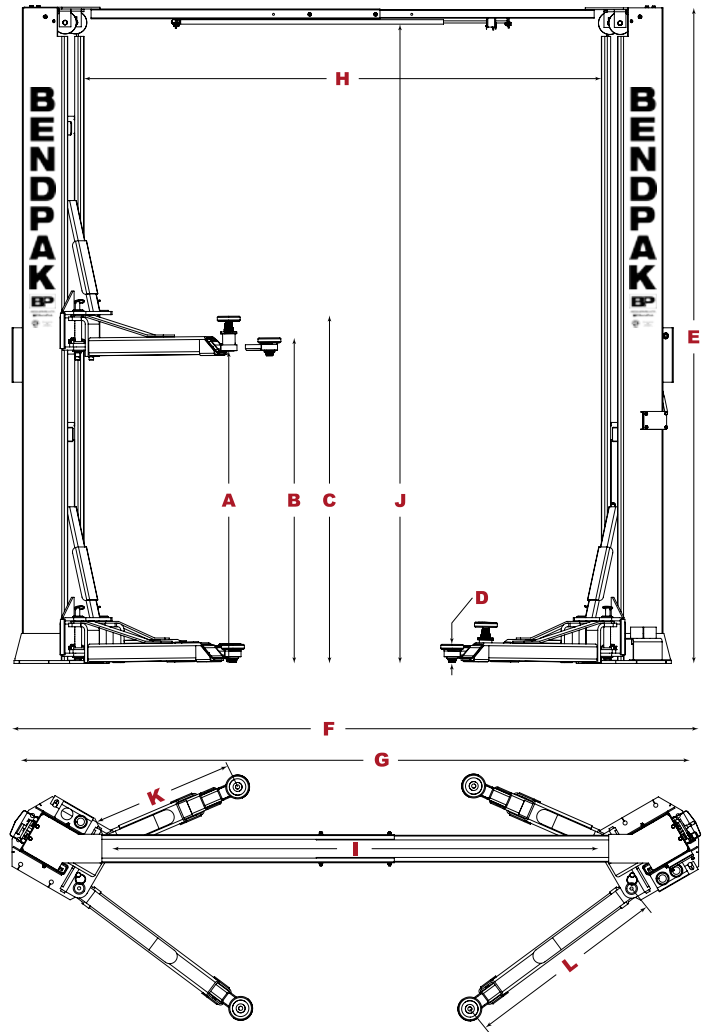

XPR-10 Pre-Existing Floor Requirements


Minimum Thickness	4.25" (108 mm)
Min. Comp Strength	3000 PSI / 28 Day Aging
Reinforcement	#6 Rebar
Rebar Spacing	12" (305 mm)

* Optional bolt-on top extension for columns raises the overall height and overhead safety bar an additional 24". Must be ordered from BendPak at time of order.

** Special voltages available upon request.

Not all BendPak lift models meet the standards as prescribed by ANSI/ALI ALCTV-2017 or ANSI/UL 201. Consult www.autolift.org for a complete list or contact BendPak via contact@bendpak.com.

XPR-10 Baseplate

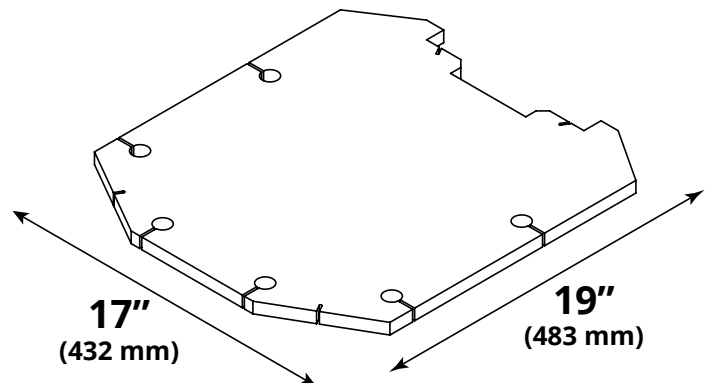

BP BendPak



1645 Lemonwood Dr, Santa Paula, CA 93060

Ranger

QUICKJACK™

AUTOSTACKER™

GRANDPRIX™

JACKPAK™

COOL BOSS™