

BP BendPak®

The Benchmark of Quality



PRODUCT CATALOG

Ranger

AUTOSTACKER™

LITESTIX™

GRANDPRIX™

COOL BOSS™

DANMAR™

JACKPAK®

QUICKJACK™

MAXJAX™



• BENDPAK •
AMERICA'S FAVORITE
SINCE 1964
CAR LIFT COMPANY
• HEAVY METAL •

• BENDPAK •
AMERICA'S FAVORITE
SINCE 1964
CAR LIFT COMPANY
• HEAVY METAL •

• BENDPAK •
AMERICA'S FAVORITE
SINCE 1964
CAR LIFT COMPANY
• HEAVY METAL •

Apparel Now Available!
Go to BendPak.com/Apparel

Table of Contents

4-5	2-Post Clearfloor Lifts
6	2-Post Medium / Heavy Floor Plate Lifts
8-9	2-Post Heavy-Duty Clearfloor Lifts
12	Light-Duty / Medium-Duty Home Garage
13	2-Post / 4-Post Lifts
14	4-Post Light-Duty
16-17	4-Post Medium-Duty
18	4-Post Options / Accessories
20-21	4-Post Heavy-Duty Lifts
22	Alignment Lifts
23	Rolling Bridge Jacks
24-25	Quatra Scissors
27	Portable Column Lift
28-29	Low-Rise & Mid-Rise Lifts
30-31	Portable Lifts & Portable 2-Post Lifts
34-35	Parking & Storage Lifts
36-37	Multi-Platform Parking Lift
39	JackPak Portable Jump Starter
40-41	Pipe Benders / Air Compressors
42-43	Power Units / Wheel Service
44-45	Tire Changers
46-47	Wheel Balancers
48-49	Brake Lathes / Wheel Aligner
50-51	Floor Jacks / Transmission Jacks
52-53	Jack Stands / Motorcycle Lifts
54	Carts & Dollies / Shop Presses
55	Work Benches / Hose Reel
56-57	Oil Drains / Oil Filter Crushers / Spray Wash Cabinets
58	Manual Wheel Service / Rolling Work Seat / Creeper Chair
59	Engine Support / Shop Crane / Inflation Cage / A/C Machine
60-61	Portable Air Coolers
62-63	Manufacturing Superiority



GENERAL DISCLAIMER

BENDPAK warrants to the original purchaser only that all products shown in this catalog conform to BENDPAK published specifications and are free from defects in material or workmanship. In no event will BENDPAK be liable to you or to anyone else for any decision made or action taken by you or anyone else in reliance on information obtained from this catalog. BENDPAK has exclusive title and ownership rights, including all intellectual property right, throughout the world in all material and content contained on these pages. Materials, design, specifications, images and other content within this catalog are subject to change. BENDPAK does not take responsibility for improper use or any results thereof. BENDPAK products are provided and sold as is without any express or implied warranties including warranties of merchantability or fitness for particular purpose. In no event will BENDPAK be liable for any special, incidental, or consequential damages based on breach of warranty, breach of contract, negligence, strict tort, or any other legal theory. Damages that BENDPAK will not be responsible for include but are not limited to: loss of profits; loss of savings or revenue; loss of use of the product or any associated equipment; cost of capital; cost of any substitute equipment, facilities, or services; downtime; the claims of third parties, including customers; and injury to property. This limitation does not apply to damages caused by breach of the warranty of title and against infringements or to claims for personal injury. Unless modified in a writing signed by both parties, it is understood that BENDPAK published warranties are to be the complete and exclusive agreement between the parties. For complete and full warranty details contact BENDPAK at 1-800-253-2363 or visit www.bendpak.com.

Equipment models shown in this catalog may be available in different voltages upon request.



2-Post Clearfloor Lifts

INFORMATION:

BendPak's all-new AP series of two-post lifts feature a revolutionary design that factors the best qualities of today's two-post lift types into a completely new concept in car lift engineering. The result is a lift unlike any other two-post lift on the market, purposefully designed for extreme use, high loads and operator safety and efficiency. This durable, safe, and reliable car lift features an expandable top beam and BI-METRIC™ arms to suit virtually every vehicle lifting requirement – symmetric or asymmetric.



AP SERIES™

10AP
Two-Post Lift
#5175304



Features column extension for 24" of additional under-clearance height for Euro-style cargo vans

10AP-168 #5175305
Two-Post Lift

10APX-181 #5175307
Two-Post Lift

OPTIONAL ACESORIES:

WSA-100 Air / Electric Workstation
#5210438



Frame Cradle Pads 60 mm Pin (Set of 4)
#5215761



Replacement Polyurethane Tuf-Pad (Set of 4)
#5700227




Fits BendPak 2-Post & 4-Post Lifts
Four 110V GFI Outlets
Nickel-Plated Ball Valve Shutoff

Sturdy Steel Construction
Tactile Rubber Mat Reduces Slippage

Highly Resistant to Gouging
Oil and Solvent Resistant
Higher Load Bearing Capacity

Model	10AP #5175304	10AP-168 #5175305	10APX #5175306	10APX-181 #5175307
Lifting Capacity	10,000 lbs.			
Max. Rise	69"		75.5"	
Max. Lifting Height	82.5"		89"	
Min. Height	4"			
Overall Height	145"	168"	157"	181"
Overall Width	135" (Narrow) or 145" (Wide)			
Drive-Thru	97.5" (Narrow) or 107.5" (Wide)			
Front Arm Reach	24.5" (min) 50" (max)			
Rear Arm Reach	32" (min) 59.25" (max)			

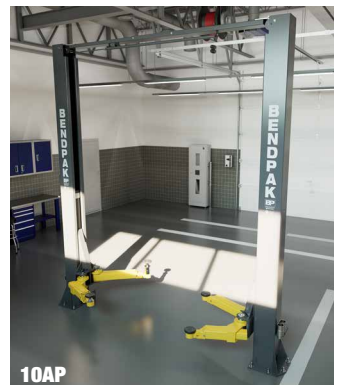

Variability in Specifications and Features: All product specifications and features listed in this catalog are for reference only. For a more accurate and comprehensive listing of product specifications and features, visit www.bendpak.com. The contents of this catalog are subject to change.

SERIES FEATURES:

- Clear-floor convenience
- Bi-Metric™ swing arms
- Low-Pro™ swing-arms
- Automatic arm restraints
- Configurable wide or narrow installation
- Single-piece columns
- Maintenance free load bearings
- Dual Direct-Drive technology
- Single-point safety release
- Dual-Synchro equalization system
- HVLP hydraulic system
- Industrial-grade hydraulic cylinders
- Super-tall lift carriages
- Varying height stackable adapters
- Triple-telescoping arms
- 14-piece standard adapter set
- Drop-end arms provide a lower pad height
- Oversized carriages for superior strength and durability

10APX Two-Post Lift

#5175306



Durable powder coat finish

NEW!

UHMW polyethylene bearing system

Single point safety release

Expandable top beam

Padded overhead safety shutoff bar

Oversized cable sheave diameter reduces cable fatigue

Automatic arm restraints

Electric / hydraulic HVLP power system


- Heavy-duty 1/2" aircraft quality equalizer cables
- Safety locks every 3"

Exclusive Bi-Metric™ arm design

Double-telescoping screw pads

Four triple-telescoping arm design

Dual hydraulic direct-drive cylinders



Medium / Heavy Duty Floor Plate

SERIES FEATURES:

- Adjustable width design
- Dual hydraulic lifting cylinders
- Single-piece columns
- Single point safety release
- Drop-end arms provide a lower pad height
- Triple-telescoping arms
- Electric / hydraulic system
- Self-lubricating dura-glide UHMW polyethylene bearing system
- Automatic arm restraints
- 4-piece stackable adapter set (XPR-9's)
- Telescoping screw pads
- Durable powder coat finish
- Safety locks in each column spaced every 3-inches
- Open top design
- Large steel base plates
- Heavy-duty 3/8" equalizer cables
- Rugged steel construction

XPR-9S Shorty Floor Plate

#5175390



Lifting Capacity - 9,000 lbs.
 Max. Rise - 72"
 Width - 132" or 145" / Height - 113"

XPR-9S-LP Shorty Floor Plate *Low-Pro™ Arms*

#5175391



Lifting Capacity - 9,000 lbs.
 Max. Rise - 72"
 Width - 132" or 145" / Height - 113"

XPR-12FDL Heavy-Duty Floor Plate

#5175403



Includes 16-Piece Adapter Set

Lifting Capacity - 12,000 lbs.
 Max. Rise - 69"
 Width - 155" / Height - 144"

Low-Pro™ Arms

2-stage low-profile arms featured on LP lift models



Low-Profile arms found on these models:

- XPR-9S-LP
- XPR-10S-LP
- XPR-10AS-LP
- XPR-10XLS-LP
- XPR-10AXLS-LP
- XPR-10S-168-LP
- XPR-10AS-168-LP
- XPR-10XLS-181-LP
- XPR-10AXLS-181-LP



XPR-9S



Triple-Telescoping Arms

EV Battery Scissor Lift

ALL NEW EV BATTERY & POWERTRAIN LIFTING SYSTEM

2,400 LB. CAPACITY

BendPak Mobi-EVS EV2400SL
Portable EV Battery Lift
SKU 5175423

- Platform Capacity - 2,400 lbs.
- Max. Platform Height - 75.75"
- Platform Size - 40" x 60"

4,000 LB. CAPACITY

BendPak Mobi-EVS EV4000SL
Portable EV Battery Lift
SKU 5175428

- Platform Capacity - 4,000 lbs.
- Max. Platform Height - 75.75"
- Platform Size - 40" x 60"



EASY TO USE PENDANT CONTROL

OPTIONAL MOBI-EVS ADAPTERS



Universal Deck Mount Kit

Fixture Set


Transmission Support

Multi-Point Support Kit


Telescoping Arm Kit



SEE IT IN ACTION!



FULL LENGTH TOOL TRAYS



Heavy-Duty Clearfloor

SERIES FEATURES:

- Dual-synchro equalization system
- Electric / hydraulic power system
- UHMW polyethylene bearings
- Single-piece columns
- Dual "Direct-Drive" cylinders
- Single point safety release
- Automatic arm restraints
- 8-piece stackable adapter pins
- Oversized column base plates
- Padded safety-shutoff bar
- Safety locks in each column
- Heavy-duty 1/2" equalizer cables
- Powder coat finish
- Rubber door bumpers
- Versatile drop in contact pads with convenient storage
- Triple-telescoping arms
- Extended height top-beam provides greater overhead clearance
- Oversized cable sheave diameter
- Rubber lift pads with stackable adapters

XPR-12CL Clearfloor

#5175405



**Includes
16-Piece Adapter Set**

Lifting Capacity - 12,000 lbs.
Max. Rise - 69"
Width - 155" / Height - 170"

XPR-15CL Clearfloor

#5175408



**Includes
16-Piece Adapter Set**

Lifting Capacity - 15,000 lbs.
Max. Rise - 69"
Width - 155" / Height - 170"

XPR-18CL Clearfloor

#5175409



**Includes
16-Piece Adapter Set**

Lifting Capacity - 18,000 lbs.
Max. Rise - 69"
Width - 155" / Height - 170"

XPR-12CL-LTA Long-Reach Telescoping Arms


#5175258




**Includes
16-Piece Adapter Set**

Lifting Capacity - 12,000 lbs.
Max. Rise - 69"
Width - 155" / Height - 170"

16-Piece Adapter Set

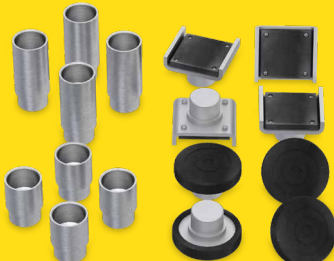

Included on all truck two-post models

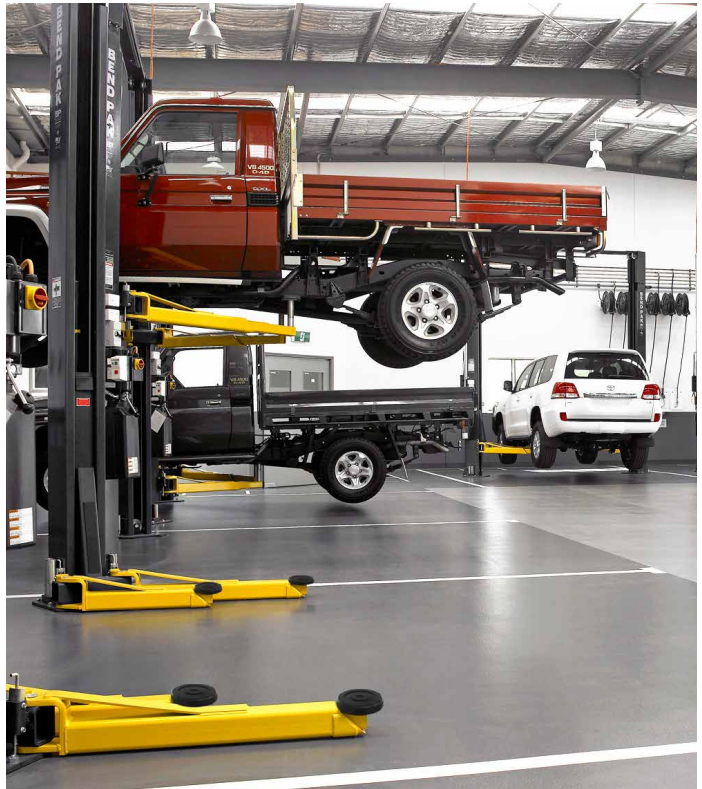

Variability in Specifications and Features: All product specifications and features listed in this catalog are for reference only. For a more accurate and comprehensive listing of product specifications and features, visit www.bendpak.com. The contents of this catalog are subject to change.

ACCESSORIES:



Frame Cradle Pads
#5215761 (set of 4)



Wide Frame Cradle Pads
#5215848 (set of 2)



Mobile High-Lift Jack Stand
#5175001



Steel Lift Pads
#5215763 (set of 4)



Air / Electric Workstation
#5210438

XPR-15CL
(Shown with optional air/electric workstation)
#5175408

- Padded overhead safety shutoff bar
- Heavy-duty 1/2" aircraft-quality equalizer cables
- Safety locks every 3"
- Oversized cable sheave diameter reduces cable fatigue
- Automatic arm restraints
- Durable rubber lift pads
- Dual hydraulic direct-drive cylinders
- Oversized A36 steel base plates
- Single point safety release
- UHMW polyethylene bearing system
- Adapter storage

XPR-12CL-192 #5175407
XPR-15CL-192 #5175410
XPR-18CL-192 #5175411
XPR-12CL-192-LTA #5175259
 Features bolt on top extension for added 24" clearance

FREE 16-Piece adapter set comes standard with all Heavy-Duty Lifts

WHEN BALANCING SAFETY AND BENDPAK GOES THE

LONG-REACH ARMS PROVIDE BETTER CENTER-OF-GRAVITY LOADING

When servicing trucks and vans with extremely long wheelbases, longer-reach arms deliver a more stable lifting solution. The lengthy triple-telescoping arms on BendPak's new **ALI Certified XPR-12CL-LTA** extend to 72" long – that's six feet in length and over one foot longer than almost any other lift or brand in its class. And with rugged BendPak dependability combined with a 16-piece adapter set, you'll realize that balancing safety* and worker productivity has never been so perfectly matched. For more information visit www.bendpak.com/LTA or call **1-800-253-2363**.



Stackable adapters come standard




Frame Cradle Pads come standard




36" - 72" arm reach

www.bendpak.com/LTA ■ 1-800-253-2363

D PRODUCTIVITY, DISTANCE.

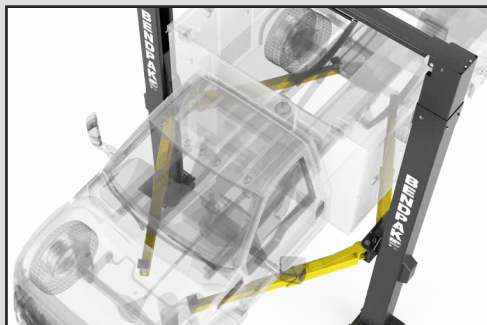

- 12,000-lb. lifting capacity
- Dual direct-drive hydraulic cylinders
- Oversized 53" tall carriage for superior strength and durability

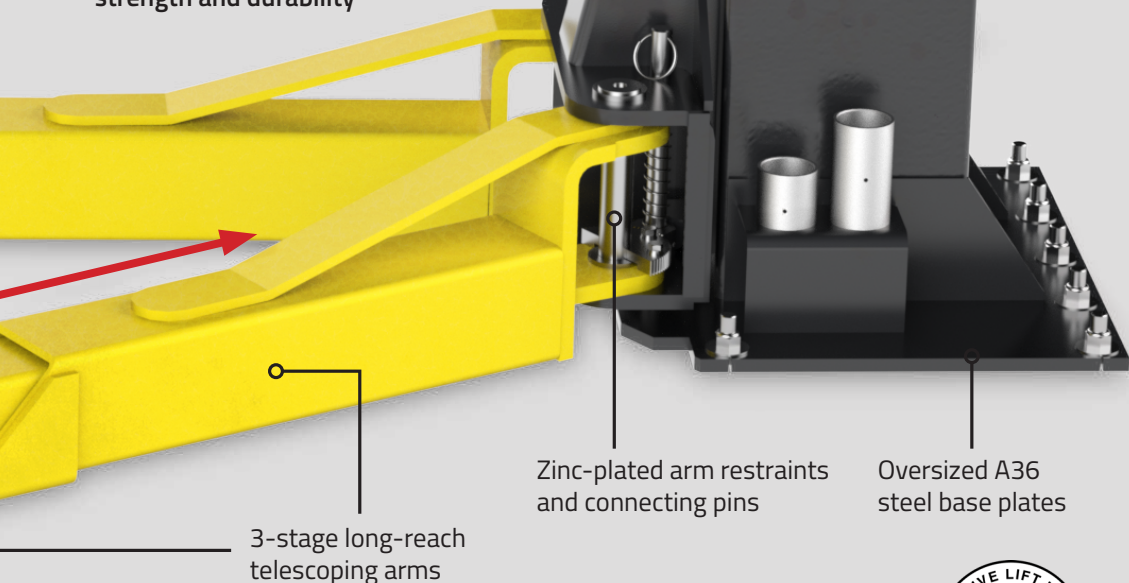

*Always read and follow all safety warnings that accompanied your lifting equipment at the time of purchase. More information regarding vehicle lift safety is available directly from BendPak or from the Automotive Lift Institute.



Light-Duty / Medium-Duty Home Garage

GP-7 SERIES FEATURES:

- 7,000-lb lifting capacity
- Telescoping Low-Pro™ arms for sports cars
- Bi-metric asymmetric & symmetric arm configuration
- Lowered arm tube supports
- Automatic arm restraints
- Taller lift carriages
- Single release-point operation
- Automatic safety locks
- Single hidden hydraulic cylinder
- (2) redundant safety cables
- Multiple lock positions
- Powder coat finish

GP-9 SERIES FEATURES:

- 9,000-lb lifting capacity
- Fastened to the floor or free-standing
- Boxed-steel columns
- 3/4" thick, automatic safety locks
- Welded-steel tread-plate runways
- Stainless steel lifting cables
- Pull out tire stops on both ends of the lift

GP-7LCS Short Height

#5175995



Lifting Capacity - 7,000 lbs.
Max. Rise - 58"
Width - 125" / Height - 106.5"

GP-7LC Medium Height

#5175996



Lifting Capacity - 7,000 lbs.
Max. Rise - 68"
Width - 125" / Height - 118.5"

GP-7 Tall Height

#5175992



Lifting Capacity - 7,000 lbs.
Max. Rise - 78"
Width - 125" / Height - 150"

GP-9F Standard

#5175254



Lifting Capacity - 9,000 lbs.
Max. Rise - 70" / Runway Length - 165.5"
Width - 114.5" / Length - 203"

GP-9XLT Tall / Long

#51751257




Lifting Capacity - 9,000 lbs.
Max. Rise - 82" / Runway Length - 189.75"
Width - 114" / Length - 227"

GP-7LCS



GP-9 MODELS INCLUDE



Dannmar Series Features & Specifications

2-Post / 4-Post Lifts

DELIVERING QUALITY AND VALUE:

Dannmar's car lifts deliver quality you can rely on. But it all starts with surpassing your expectations. Like you, we know that when you put a vehicle up in the air, there are a few things you count on right away. First are safety, quality, and vehicle access. Dannmar easily delivers on all three of these. Our design and manufacturing process is based on an effort to have all of our automotive lifts ANSI/ALI certified. Dannmar's lifts are built from a history of carefully exceeding the needs of the vehicle repair industry for over 50 years and most importantly always looking for what's next.

D4-9 PACKAGES INCLUDE:

- D4-9 or D4-9X four-post lift
- Caster kit
- Plastic drip trays (set)
- JP45 sliding jack trays
- Aluminum approach ramps (set)

DANNMAR

D2-8F Two-Post Lift


#5175316



Lifting Capacity - 8,000 lbs.
Max. Rise - 72"
Width - 132" or 145" / Height - 113"

D2-10C Two-Post Lift

#5175314



Lifting Capacity - 10,000 lbs.
Max. Rise - 69"
Width - 145.25" / Height - 145"

D2-10A Two-Post Lift

#5175313



Lifting Capacity - 10,000 lbs.
Max. Rise - 69"
Width - 143.5" / Height - 145"

D2-12C Heavy Duty Two-Post Lift

#5175312



Lifting Capacity - 12,000 lbs.
Max. Rise - 69"
Width - 155.25" / Height - 168.75"

D2-15C Heavy-Duty Two-Post Lift

#5175311



Lifting Capacity - 15,000 lbs.
Max. Rise - 69"
Width - 155.25" / Height - 168.75"

D4-9 Package Four-Post Lift

#5175319



Lifting Capacity - 9,000 lbs.
Max. Rise - 70" / Runway Length - 165.5"
Width - 114.5" / Length - 203"

D4-9X Package Four-Post Lift

#5175321



Lifting Capacity - 9,000 lbs.
Max. Rise - 82" / Runway Length - 189.75"
Width - 114.5" / Length - 227"

D4-12 Four Post Lift

#5175317



Lifting Capacity - 12,000 lbs.
Max. Rise - 68.75" / Runway Length - 194.75"
Width - 127.5" / Length - 233.5"

D4-12A Alignment Four-Post Lift

#5175318



Max. 2 Wheel Align. - 163.5" / Max Rise - 68.75"
Capacity - 12,000 lbs. / Runway Length - 194.75"
Width - 127.5" / Length - 233.5"

4-Post Light-Duty

SERIES FEATURES:

- Runways feature non-skid surface
- Single hydraulic cylinder under ramp
- Fully enclosed lifting cables, safety locks and sheaves
- Pneumatic push-button safety release
- Features 1-1/4" sheave axles
- Features heavy-duty 3/8" aircraft cable
- Internal "anti-sway" slider blocks in each column
- Electric / hydraulic power system
- Oversized sheave diameters
- Rugged, self-lubricating cable sheaves
- Multi-position safety locks in columns
- Dual-position power unit locations
- Redundant slack-cable safety latches
- Fully adjustable lock leveling stops
- Drive through ramps option available
- 36" approach ramps available
- Durable powder coat finish
- Rugged steel construction
- High-speed lifting

**HD-7P
Narrow**
#517510



Lifting Capacity - 7,000 lbs.
Max. Rise - 82" / Runway Length - 164"
Width - 100.25" / Length - 200"

**HD-7W
Wide**
#5175120



Lifting Capacity - 7,000 lbs.
Max. Rise - 82" / Runway Length - 164"
Width - 110.25" / Length - 200"

**HD-7PXW
Super-Tall**
#5175516



Lifting Capacity - 7,000 lbs.
Max. Rise - 140" / Runway Length - 188"
Width - 110.25" / Length - 224.5"

**HD-7500BLX
Boat Lift**
#5175315




Lifting Capacity - 7,500 lbs.
Max. Rise - 82" / Runway Length - 188.5"
Width - 132" / Length - 224"

**HD-75BXT
Boat Lift**
#5175251



Lifting Capacity - 7,500 lbs.
Max. Rise - 82" / Runway Length - 213"
Width - 134" / Length - 249"

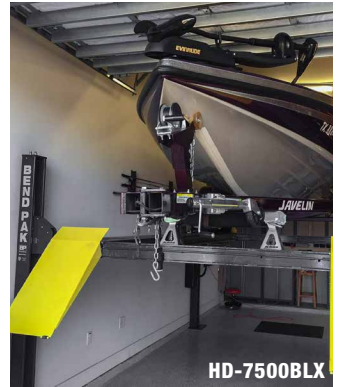

HD-7500BLX

SPECIAL LIFT COLORS

Customize your BendPak lift with the color that best suits your garage or shop interior design. Gunmetal **Gray** comes standard, but for a nominal fee you can choose from optional Classic **Blue**, Graphite **Black** or race-inspired **Seca Red**. Available on select models.



Classic Blue



Graphite Black



Seca Red

SHIP, DELIVER & INSTALL. WE DO IT ALL.

Shop Planning • Above Ground Lift Installation • Painless Equipment Delivery

SERVICE IS OUR SPECIALTY

BendPak has a network of installation and service teams throughout the United States authorized to provide installation and support on all of the products we sell. With over 700 service centers, you can rest assured that the products you purchase from BendPak are backed by a nationwide team of qualified service personnel. At BendPak, we've made a commitment to offer unparalleled service and support. More than just a seller, we want to be your automotive equipment partner for life.

FREE SHIPPING*

At BendPak, we are dedicated to delivering your purchase as quickly and affordably as possible. All products marked FREE SHIPPING include FREE destination delivery to all direct shipping points within the 48 contiguous United States. For heavy equipment purchases, we offer a range of delivery and pick-up options so you can choose the shipping method that best meets your needs.



WE SHIP



WE DELIVER



WE INSTALL

EASY TO ORDER – DELIVERED RIGHT TO YOUR DOOR


Ordering lifts or shop equipment from BendPak is fast and easy. Whether for the shop or home, we'll make sure your order is delivered to you as fast and conveniently as possible. And we'll arrange the installation and set-up as well if you wish. Placing an order takes just minutes. Either call and speak to one of our courteous specialists or place your order online and click your way through. If you ever need assistance or advice, our friendly consultants are only a phone call away. We look forward to serving you.

IF YOU FIND A LOWER PRICE, WE'LL MATCH IT OR BEAT IT - GUARANTEED.

If you find a lower price anywhere on an identical BendPak™ or Ranger™ brand product sold in the United States, show us the lower advertised price at the time of purchase and we will match it on the spot. Or show us the lower price within 14 days of your purchase and we will pay you the difference. We will not match other retailer's mail-in rebates nor will we deduct the value of any gift with purchase.



BendPak reserves the right to verify all information. Our low-price guarantee covers identical BendPak and Ranger branded items with the same model number, features and U.S. warranty. The item must be in stock and available for purchase at the price as advertised. We reserve the right to call and verify that the item is in stock and available for purchase at the price as advertised. Low price guarantee applies only to items shown in this flyer. Taxes, ad errors, closeouts, clearance, liquidation, free product offers, special orders, offers advertised at a specific location and refurbished items are also excluded from this guarantee.



4-Post Medium-Duty

SERIES FEATURES:

- Freestanding or bolt-down design
- Runways feature non-skid surface
- Single hydraulic cylinder under ramp
- Fully enclosed lifting cables, safety locks and sheaves
- Pneumatic push-button safety release
- Features 1-1/4" sheave axles
- Internal "anti-sway" slider blocks in each column
- Features heavy-duty 3/8" aircraft cable
- Longer ramps for low ground clearance vehicles
- Oversized sheave diameters
- Rugged, self-lubricating cable sheaves
- Multi-position safety locks in columns
- Dual-position power unit locations
- Redundant slack-cable safety latches
- Fully adjustable lock leveling stops
- Drive through ramps option available
- 36" approach ramps available
- Perfect for parking, storage and service

HD-9 Wide Standard

#5175861



Lifting Capacity - 9,000 lbs.
Max. Rise - 70" / Runway Length - 164"
Width - 110.25" / Length - 200"

HD-9ST Narrow Standard

#5175860




Lifting Capacity - 9,000 lbs.
Max. Rise - 70" / Runway Length - 164"
Width - 100.25" / Length - 200"

HD-9STX Narrow Tall Long

#5175862



Lifting Capacity - 9,000 lbs.
Max. Rise - 82" / Runway Length - 188"
Width - 100.25" / Length - 224"

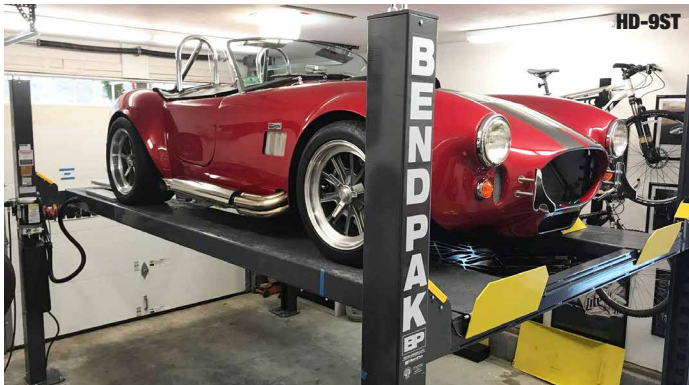

HD-9ST

HD-9XW Wide Tall Long

#5175863



Lifting Capacity - 9,000 lbs.
Max. Rise - 82" / Runway Length - 188"
Width - 110.25" / Length - 224"

HD-9



HD-9XL Wide Standard Long


#5175859



Lifting Capacity - 9,000 lbs.
Max. Rise - 70" / Runway Length - 188"
Width - 110.25" / Length - 224"

Variability in Specifications and Features: All product specifications and features listed in this catalog are for reference only. For a more accurate and comprehensive listing of product specifications and features, visit www.bendpak.com. The contents of this catalog are subject to change.

ACCESSORIES:




Jack Platform
(Jacks not included)



Caster Kit
#5210997



RBJ4500 Rolling Bridge Jack
#5175988 (ea)



Aluminum Deck



Drip Trays
#5700301 (set of 2)

HD-9SW Double Wide Standard

#5175023




Lifting Capacity - 9,000 lbs.
Max. Rise - 70" / Runway Length - 164"
Width - 202" / Length - 200"

HD-9SWX Double Wide Tall Long

#5175024



Lifting Capacity - 9,000 lbs.
Max. Rise - 82" / Runway Length - 188"
Width - 202" / Length - 224"

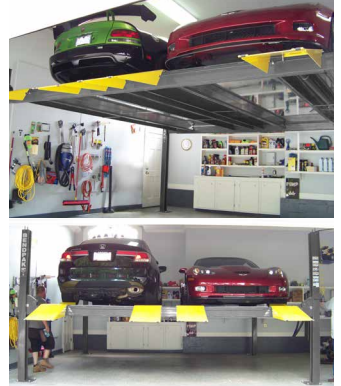

HD-9 Series

Oversize self-lubricating cable sheaves

- Push button pneumatic safety release
- Electric/hydraulic power system
- Optional power unit locations

Rugged 1-1/4" roller axles

Independent backup slack-cable safety latches

Optional rolling bridge jacks

Adjustable lock ladders

Longer approach ramps

- Heavy-duty 3/8" aircraft cables
- Multi-position safety locks



See it on the BendPak / Ranger YouTube Page

Options/Accessories



Caster Kit #5210997
Fits HD-7 & HD-9 Series



RBJ4500 #5175988
Rolling Bridge Jack



JP-45 #5215825
4,500 lb. Capacity Jack Platform




(Bottle jacks not included)

JP-6 Telescoping #5175349
6,000 lb. Capacity Jack Platform




WSA-100 #5210438
Air Electric Workstation




- #5210208 (Long-Wide)
- #5210174 (Long-Narrow)
- #5210209 (Short-Wide)
- #5210207 (Short-Narrow)

Solid Aluminum Decks




#5174497

Aluminum Approach Ramps
Width - 19.75" / Length - 36.75"



- #5174670 (HD-9SW/SWX)
- #5174705 (HD-7 & HD-9 Series)

Extended Alum. Approach Ramps
Width - 19.75" / Length - 48"



- #5210055 (HD-7 & HD-9 Series)
- #5210747 (HDS-14 Series)
- #5210328 (HDS-18 & HDS-27 Series)
- #5210325 (HDS-35 & HDS-40 Series)

Extended Steel Approach Ramps
Width - 19.75" / Length - 48"



Caster Kit



Solid Aluminum Decks

Rechargeable Work Light



LITESTIX™


By BendPak

LiteStix LS36MD
Rechargeable
Work Light



#5150029



The LITESTIX™ LS36SMD is a versatile LED rechargeable portable work light with 36 super-bright LED bulbs that provide brilliant lighting coverage anywhere you need it. Includes a large 1,800 mAh lithium-ion battery that provides up to 3 hours of continuous use, hi and low settings, impact resistant polycarbonate housing, detachable telescoping grip that expands from 49.5" to 79.75", two swivel magnets for quick mounting to work benches, tool boxes or car lift components, and durable stowable hooks for hanging or mounting.


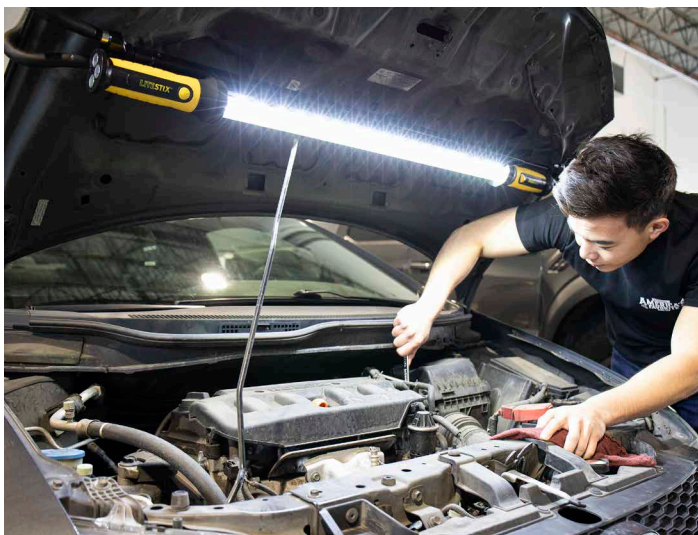


1200
LUMENS



UP TO 6 HOURS OF
CONTINUOUS USAGE

6 HRS



4-Post Heavy-Duty

SERIES FEATURES:

- Adjustable runway widths
- Single hydraulic cylinder under ramp
- Fully enclosed lifting cables, safety locks and sheaves
- Pneumatic push-button safety release
- Features heavy-duty aircraft cable
- Runways feature non-skid surface
- Internal "anti-sway" slider blocks in each column
- Longer ramps for low ground clearance vehicles
- Oversized sheave diameters
- Rugged, self-lubricating cable sheaves
- Features heavy-duty sheave axles
- Multi-position safety locks in columns
- Dual-position power unit locations
- Redundant slack-cable safety latches
- Fully adjustable lock leveling stops
- Drive-through ramps option available
- 48" approach ramps available
- Customizable power unit location

HDS-14 Standard Length

#5175170



Lifting Capacity - 14,000 lbs.
Max. Rise - 70" / Runway Length - 203"
Width - 131.75" / Length - 241"

HDS-14X Extended Length

#5175173



Lifting Capacity - 14,000 lbs.
Max. Rise - 70" / Runway Length - 233"
Width - 131.75" / Length - 271"

HD-14T Super Tall

#5175004



Lifting Capacity - 14,000 lbs.
Max. Rise - 82" / Runway Length - 195"
Width - 127.5" / Length - 234"

HDSO-14P Open Front Standard Length

#5175152



Lifting Capacity - 14,000 lbs.
Max. Rise - 70" / Runway Length - 199"
Width - 143" / Length - 244"

HDS-18E Standard Length

#5175968



Lifting Capacity - 18,000 lbs.
Max. Rise - 61.25" / Runway Length - 257.5"
Width - 153.5" / Length - 312.75"

HDS-27 Standard Length

#5175162



Lifting Capacity - 27,000 lbs.
Max. Rise - 61.25" / Runway Length - 257.5"
Width - 153.5" / Length - 312.75"

HDS-18E



HDS-27X



Variability in Specifications and Features: All product specifications and features listed in this catalog are for reference only. For a more accurate and comprehensive listing of product specifications and features, visit www.bendpak.com. The contents of this catalog are subject to change.

ACCESSORIES:



Rolling Bridge Jack



DP-30 Rolling Oil Drain
#5150509



Air / Electric Workstation
#5210436



Rolling Bridge Airline Kit
#5174010

**HDS-27X
Extended Length**
#5175164



Lifting Capacity - 27,000 lbs.
Max. Rise - 61.25" / Runway Length - 317.5"
Width - 153.5" / Length - 372.75"

**HDS-40
Standard Length**
#5175176




Lifting Capacity - 40,000 lbs.
Max. Rise - 61.25" / Runway Length - 244.5"
Width - 153.5" / Length - 313.75"

**HDS-40X
Extended Length**
#5175178



Lifting Capacity - 40,000 lbs.
Max. Rise - 61.25" / Runway Length - 304.5"
Width - 153.5" / Length - 373.5"

HDS-40X Shown with optional rolling bridge jacks

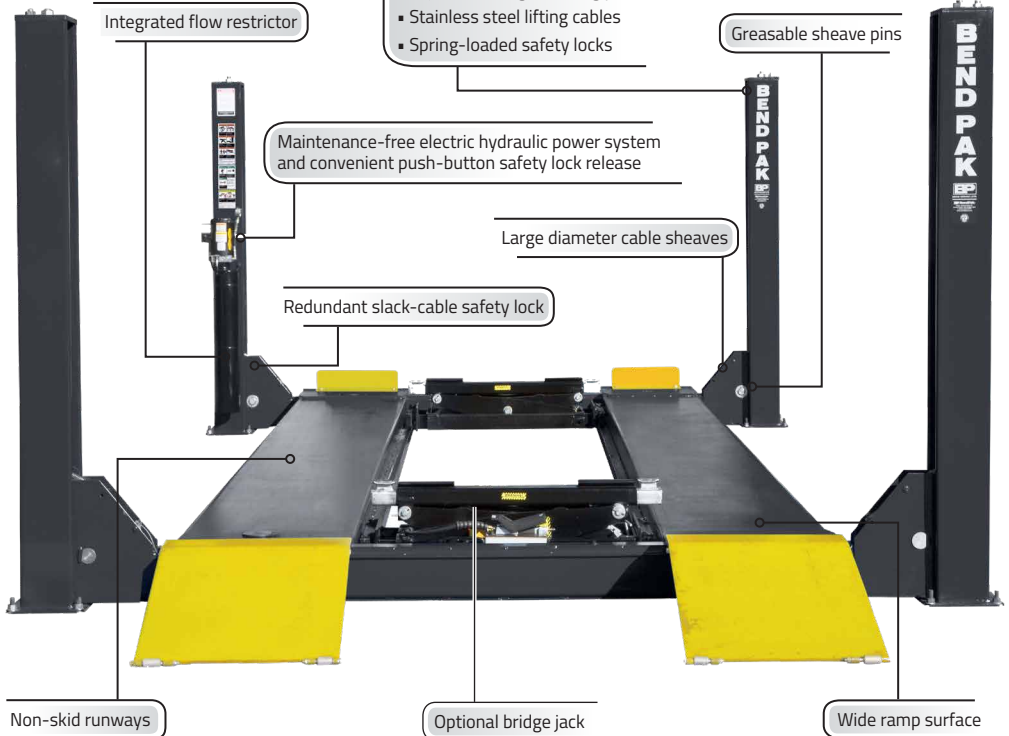

Alignment Lifts

SERIES FEATURES:

- Runways adjust to different widths
- Multi auto-level locking positions
- Single hydraulic cylinder
- Fully enclosed lifting cables and sheaves
- Pneumatic push-button safety release
- Heavy-duty aircraft cable
- Runways feature non-skid surface
- Self-lubricating cable sheaves
- Oversized sheave diameter
- Features heavy-duty sheave axles
- Fully adjustable lock stops
- Drive through ramps available
- Rolling bridge airline kit available
- Roll back kit available



Equipped with rear slip plates and galvanized front turn plates

HD-9AE Alignment Lift

#5175820



Max. 2 Wheel Align. - 160" / Max. Rise - 70"
Capacity - 9,000 lbs. / Runway Length - 188"
Width - 127" / Length - 224"

HDS0-14AX Open Front

#5175153



Max. 2 Wheel Align. - 182" / Max. Rise - 70"
Capacity - 14,000 lbs. / Runway Length - 199"
Width - 143" / Length - 243"

HDS-14LSX Extended Length

#5175171



Max. 2 Wheel Align. - 182" / Max. Rise - 70"
Capacity - 14,000 lbs. / Runway Length - 199"
Width - 130" / Length - 241"

HDS-14LSXE Limo Extended Length

#5175172



Max. 2 Wheel Align. - 212" / Max. Rise - 70"
Capacity - 14,000 lbs. / Runway Length - 229"
Width - 130" / Length - 271"



HDS-18EA Truck Alignment

#5175969



Max. 2 Wheel Align. - 211" / Max. Rise - 59"
Capacity - 18,000 lbs. / Runway Length - 257.5"
Width - 153.5" / Length - 312.75"



Rolling Bridge Jacks

SERIES FEATURES:

- 4,500 - 25,000 lb. lifting capacity
- Versatile drop in lifting pads
- Multi-piece adapter set standard
- High-pressure hydraulic power unit
- Stackable adapters
- Automatic safety locks
- Three safety-lock positions
- Rubber lifting pads or steel lifting pads come standard or optional
- Optional air-line kit
- Raise 2 or 4 wheels off the runways
- Telescoping roller design allows the runways to be adjusted for different tread widths



RJ45W Rolling Jack

#5175247



Lifting Capacity - 4,500 lbs.
Arm Reach - 42" - 57"
Frame Reach - 35.5" - 46.5"

RJ6W Rolling Jack

#5175248



Lifting Capacity - 6,000 lbs.
Arm Reach - 42" - 56"
Frame Reach - 36.25" - 47.25"

RJ7W Rolling Jack

#5175249



Lifting Capacity - 7,000 lbs.
Arm Reach - 42" - 56"
Frame Reach - 36.25" - 46.5"

RJ9W Rolling Jack

#5175252



Lifting Capacity - 9,000 lbs.
Arm Reach - 42" - 56"
Frame Reach - 45" - 50"

RBJ15000 Rolling Jack

#5175031



INCLUDES:
8-Piece Adapter Set

Lifting Capacity - 15,000 lbs.
Arm Reach - 48.5" - 63.75"
Frame Reach - 45.75" - 59"

RBJ18000 Rolling Jack

#5175032



INCLUDES:
8-Piece Adapter Set

Lifting Capacity - 18,000 lbs.
Arm Reach - 48.5" - 63.75"
Frame Reach - 45"

RBJ25000 Rolling Jack

#5175033



INCLUDES:
8-Piece Adapter Set

Lifting Capacity - 25,000 lbs.
Arm Reach - 48.5" - 63.75"
Frame Reach - 45"


RJ45W



Quatra Scissors

SERIES FEATURES:

- 12,000-lb. lifting capacity
- Extended runway design
- Durable powder coat finish
- Multi-position runway work steps
- Non-skid runways for sure grip
- Electric / hydraulic power system
- Integrated velocity fuses for cylinders
- Power console with simple controls
- Open-center design
- Quad automatic safety locks with pneumatic push-button release
- Lubricated bearing on all pivot points
- Rugged steel legs
- Can be flush mounted or recessed
- Easy to use and understand
- High efficiency hydraulic power unit
- Collapsible front tire stops clear for low vehicle skirts
- Straight up vertical lifting
- Multi-position automatic leveling system
- Easy access to components for servicing

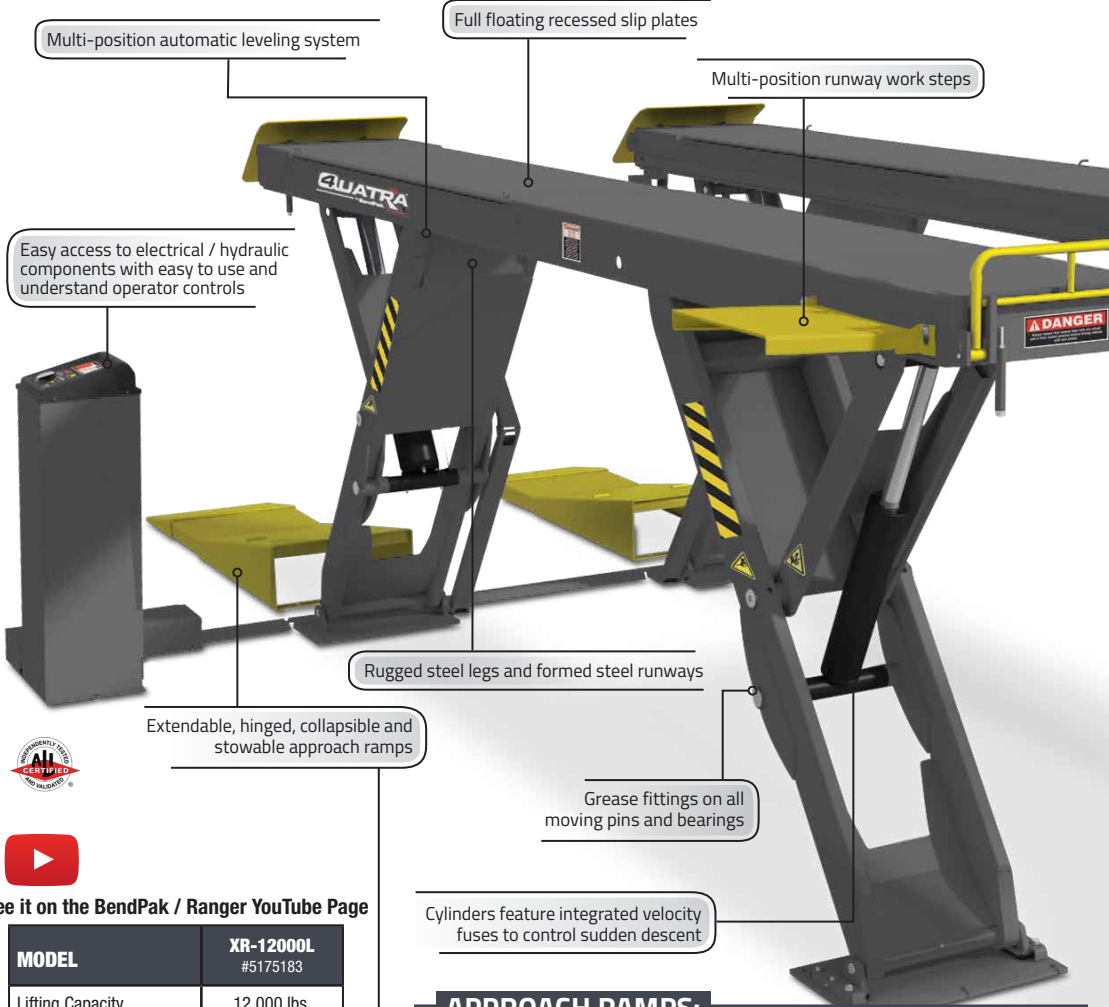

See it on the BendPak / Ranger YouTube Page

MODEL	XR-12000L #5175183
Lifting Capacity	12,000 lbs.
Overall Width	88"
Overall Length	257.75"
Runway Width	24"
Length of Runways	193"
Max. Lifting Height	75"

APPROACH RAMPS:



Variability in Specifications and Features: All product specifications and features listed in this catalog are for reference only. For a more accurate and comprehensive listing of product specifications and features, visit www.bendpak.com. The contents of this catalog are subject to change.

ACCESSORIES:



DP-30 Rolling Oil Drain
#5150509



3D Aligner (pg. 49)
#5140101



Rolling Bridge Airline Kit
#5174008



#5175987
Optional RBI6000 - 6,000 lb. capacity rolling bridge jack



XR-12000L
#5175183

This is my BendPak

***There are many,
but this one's mine.***

"Keeping my shop working efficiently and safe during endless hours of filming and running a Mopar specialty shop is not easy. That's why I use the best tools and equipment money can buy. I am a true believer in BendPak because they build the best products and offer great service. My BendPak's are one part of my operation that I can truly depend on which allows me to focus on other parts of my business, like resurrecting the best Mopars on the planet."

*-Mark Worman, Master of all things Mopar
Owner of Welby's Car Care Center and
star of TV's "Graveyard Carz"*

BP BendPak®

For more information on BendPak's entire product line,
call 1-800-253-2363 or visit www.bendpak.com

© 2023 BendPak Inc. All rights reserved.

Portable Column Lift

SERIES FEATURES:

- 18,000-lb. individual column capacity
- 108,000-lb. maximum system capacity
- SINGLE, PAIR or TEAM operation
- Three, 30' cables are used, leaving the front or back of the lift clear of cables
- Self-diagnostics and self-calibration
- Control systems feature 24-volt circuitry
- Variable height limit settings
- Two-speed lowering option settings
- Equipped with a warning light and audible alarm for critical warning alerts
- Emergency shutoff on each column
- Key lock enclosure on each column
- Electronics are multi-fuse protected
- Enclosed electric-hydraulic power system
- Pallet-jack style steering wheels
- Extended forks accommodate wide tires and deep wheel configurations
- Multi-width wheel forks with locking pins
- Tandem 8" diameter polyurethane covered steel wheels

PCL-18B (Set of 4)

#5175292



Column Capacity - 18,000 lbs.
System Capacity - 72,000 lbs.
Lifting Height - 71.5"

PCL-18B (Set of 6)


#5175293




Column Capacity - 18,000 lbs.
System Capacity - 108,000 lbs.
Lifting Height - 71.5"

PCL-18B (Set of 8)

#5175294

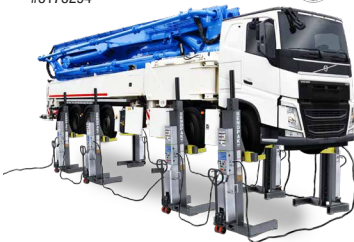

Column Capacity - 18,000 lbs.
System Capacity - 144,000 lbs.
Lifting Height - 71.5"

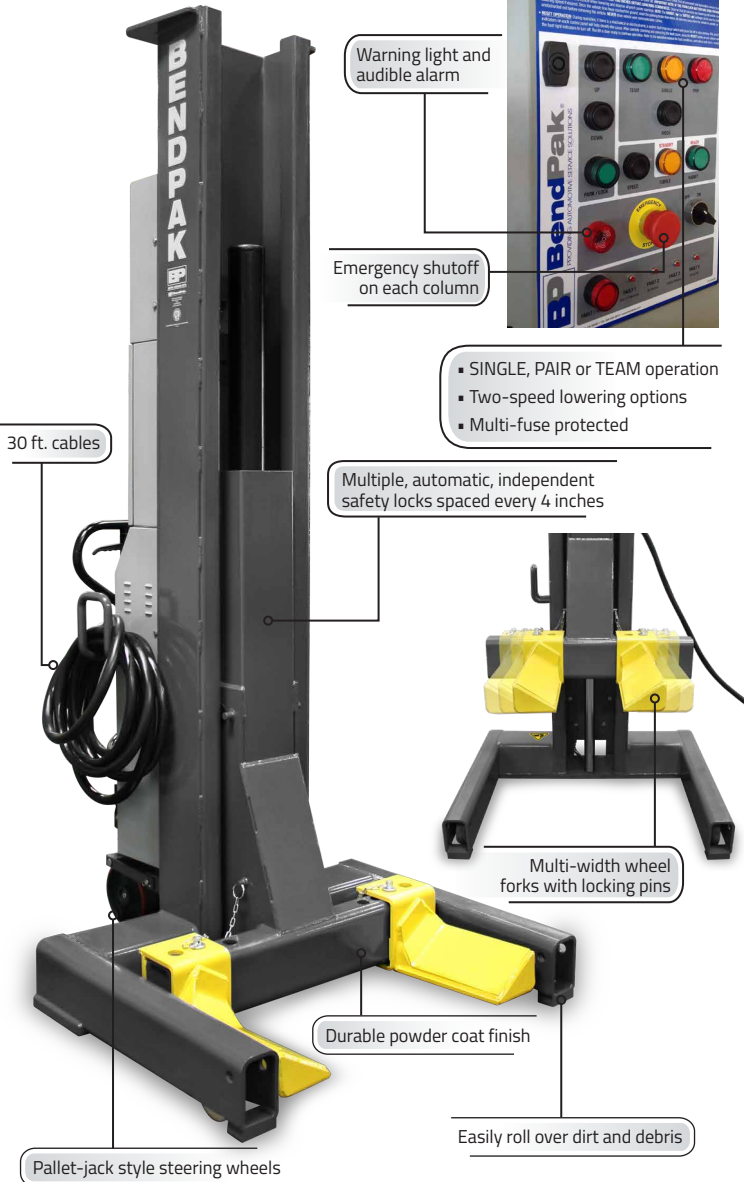

Low-Rise / Mid-Rise / Full-Rise

SERIES FEATURES:



MD-6XP Model
Multi-piece Adapter Set



SP-7X & All Low-Rise Models
1.5" Rubber Lift Blocks



Portable Models
Mobile Power Cart

LR-60 Low-Rise Lift

#5175729



Comes standard
with rubber lift blocks

Lifting Capacity - 6,000 lbs.
Lift Pad Dimensions - 18" x 52"
Height Range - 3.5" - 25"

LR-60P Low-Rise Portable Lift

#5175728



Comes standard
with rubber lift blocks

Lifting Capacity - 6,000 lbs.
Lift Pad Dimensions - 18" x 52"
Height Range - 3.5" - 25"

MD-6XP Mid-Rise Portable Lift

#5175730



Comes standard
with adapter set

Lifting Capacity - 6,000 lbs.
Adjustable Arms
Height Range - 4.75" - 47"

MD-6XP

#5175730

Perfect for light-duty trucks and cars

Durable powder coat finish

Safety lock bar with multiple lock positions

Adjustable arm assemblies

Solid steel torsion bar

Twin hydraulic cylinders

Portable motor cart
serves as tow handle

Multi-piece adapter set



Variability in Specifications and Features: All product specifications and features listed in this catalog are for reference only. For a more accurate and comprehensive listing of product specifications and features, visit www.bendpak.com. The contents of this catalog are subject to change.

ACCESSORIES:



1.5" Rubber Lift Blocks



3" Rubber Lift Blocks




6" Rubber Lift Blocks



LR-4A Arm Kit
#5210944

P9000LT Low-Rise Pit Lift

#5175133



Comes standard
with rubber lift blocks

Lifting Capacity - 9,000 lbs.
Lift Pad Dimensions - 24" x 58.5"
Height Range - 4" - 24"

P9000LTF Low-Rise Pit Lift Flush Mount

#5175155



Comes standard
with rubber lift blocks

Lifting Capacity - 9,000 lbs.
Lift Pad Dimensions - 24" x 58.5"
Height Range - 4" - 24"

Optional P-9000 Series Telescoping Arm Kit

#5210194



Capacity / Each arm - 2,250 lbs.
(4) Lift Arms • (4) Contact pads

LR10000 Low-Rise Lift

#5175232



Comes standard
with 8-pc. adapter set

Lifting Capacity - 10,000 lbs.
Lift Pad Dimensions - 24" x 53"
Height Range - 4.5" - 23"

MDS-6LP Mid-Rise Scissor Lift

#5175226



Comes standard
with rubber lift blocks

Lifting Capacity - 6,000 lbs.
Lift Pad Dimensions - 19" x 67"
Height Range - 5" - 44"

MDS-6LPF Mid-Rise Scissor Flush Mount

#5175227



Comes standard
with rubber lift blocks

Lifting Capacity - 6,000 lbs.
Lift Pad Dimensions - 19" x 67"
Height Range - 5" - 44"

SP-7XE Full-Rise Scissor Lift

#5175424



Comes standard
with rubber lift blocks

Capacity - 7,000 lbs.
Lift Pad Dimensions - 22" x 62.5"
Height Range - 6.5" - 70.5"


SP-7XEF Full-Rise Flush Mount Scissor Lift

#5175425



Comes standard
with rubber lift blocks

Capacity - 7,000 lbs.
Lift Pad Dimensions - 22" x 62.5"
Height Range - 6.5" - 70.5"

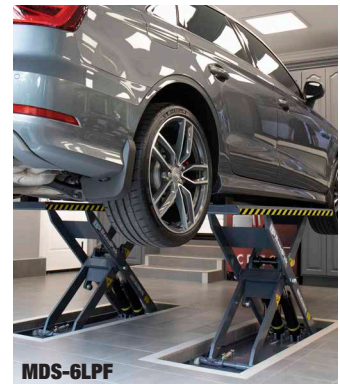

MDS-6LPF

Portable Lifts

ACCESSORIES:



Wall Hanger Set
#5210199



Truck Adapter Kit
#5150561



Frame Extensions
#5620291



ATV Lift Kit
#5150006

3500SLX 3,500-lb. Capacity Portable Car Lift

#5175010



5000TL 5,000-lb Capacity Portable Car Lift

#5175630

5000TLX 5,000-lb. Capacity Portable Car Lift

#5175635



Lifting Height - 3" - 21"
Frame Width - 10.5"
Frame Length - 62.5"



Lifting Height - 3" - 24"
Frame Width - 11"
Frame Length - 70"



Lifting Height - 3" - 24"
Frame Width - 11"
Frame Length - 76"

6000ELX 6,000-lb. Capacity Portable Car Lift

#5175650



7000TL 7,000-lb. Capacity Portable Car Lift

#5175640



7000TLX 7,000-lb. Capacity Portable Car Lift

#5175645



Lifting Height - 3.5" - 24.5"
Frame Width - 12.5"
Frame Length - 86.75"



Lifting Height - 3.5" - 24.5"
Frame Width - 12.5"
Frame Length - 70.75"



Lifting Height - 3.5" - 24.5"
Frame Width - 12.5"
Frame Length - 76"

QuickJack Features

- Extended block trays
- Zero-leak fittings
- Open-center design
- 14-gauge welded steel frames
- Integrated power-assist canisters
- Quick-connect/disconnect hoses
- Includes eight piece set of adjustable rubber lift blocks
- Remote pendant control
- Steel mounted urethane wheels
- Dual-position automatic safety lock bars



6000ELX

QUICKJACK™

MaxJax Series Features & Specifications

Portable 2-Post Lifts

SERIES FEATURES:

- 6,000-lb Lifting capacity
- Maximum lifting height - 50.5"
- Minimum pad height - 4.5"
- Lock positions - 7 (every 3")
- Overall height - 89.5"
- Drive-thru clearance - 74" - 104"
- Motor - 110 VAC / 50-60 Hz / 1 Ph
- Strong steel construction
- Direct-drive, low-pressure cylinders
- Maintenance-free slide blocks
- Quick-disconnect self-sealing hose connection
- Built-in wheels that allow you to move it easily
- Automatic safety locks
- Optional motorcycle adapters are available

Motorcycle Adapter



M6K Portable Two-Post Lift Standard Package

#5175331



PACKAGE INCLUDES:

M6K Portable Lift With All Standard Accessories

M6K Portable Two-Post Lift Deluxe Package

#5175335



PACKAGE INCLUDES:

M6K Portable Car Lift
Upright Oil Drain
Rolling Work Seat

M6K Portable Two-Post Lift Supreme Package

#5175334



PACKAGE INCLUDES:

M6K Portable Car Lift / Upright Oil Drain
Rolling Work Seat / 5" Tall Adapter Pins Frame
Cradle Pads


M6K Portable Two-Post Lift Ultimate Package

#5175333



PACKAGE INCLUDES:

M6K Portable Car Lift / Upright Oil Drain
Adjustable Creeper / 5" Tall Adapter Pins
Frame Cradle Pads

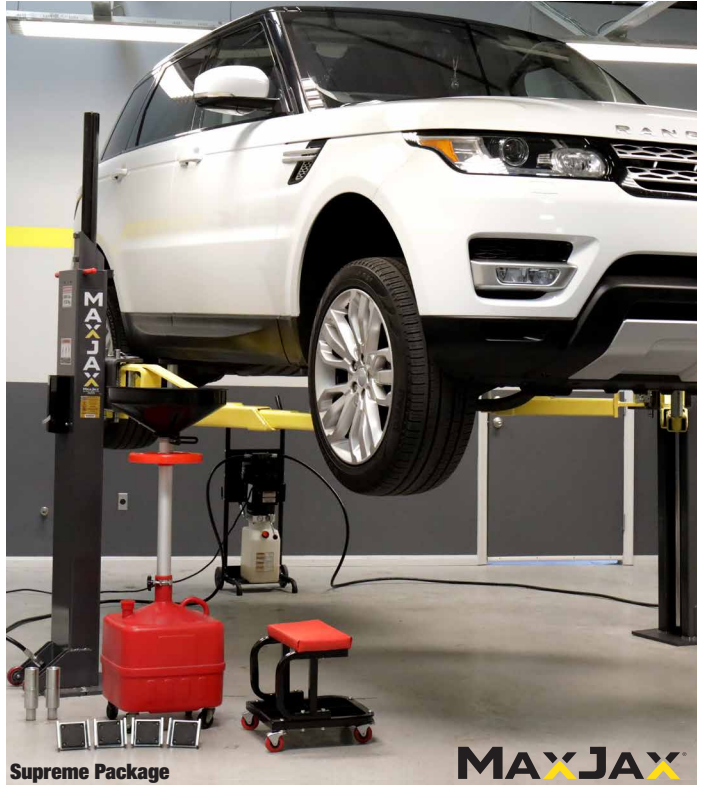



BP BendPak®



Parking & Storage Lifts

A6 SERIES FEATURES:

- 6,000-lb. lifting capacity
- Simple push button controls
- Dual, direct drive hydraulic lifting cylinders
- Automatic safety locks engage at six different parking heights
- Minimal footprint fits a typical parking space
- 100% hot-dipped, galvanized steel platform
- Accommodates cars, light trucks and SUVs

HD-973P SERIES FEATURES:

- Perfect for parking, storage and service
- Perfect for cars, trucks, and SUVs
- 7,000 lb. capacity upper deck
- 9,000 lb. capacity lower deck
- Padded trip bar with limit switch prevents lower vehicle from making contact with upper platform
- Galvanized option available

A6S Scissors Parking Lift

#5175274



A6W Extra Wide Scissors Parking Lift

#5175282



GALVANIZED OPTION AVAILABLE

A6S-G
A6W-G



Capacity - 6,000 lbs.
Lifting Height (Top Lock) - 81.25"
Overall Width - 103" / Length - 143"

Capacity - 6,000 lbs.
Lifting Height (Top Lock) - 81.25"
Overall Width - 111" / Length - 144"

HD-973P Tri-Level Parking Lift

#5175238



Capacity - 7K lbs. Top Deck / 9K lbs. Bot. Deck
Runway (L) - 188.5" / Overall Height - 161"
Width - 112" / Length - 242"

HD-973PX Tri-Level Parking Lift Extended

#5175267



Capacity - 7K lbs. Top Deck / 9K lbs. Bot. Deck
Runway (L) - 199" / Overall Height - 173"
Width - 112" / Length - 252.25"

GALVANIZED OPTION AVAILABLE

HD-973P-G
HD-973PX-G




PL-6000DC Two-Post Parking Lift

#5175427



Lifting Capacity - 6,000 lbs.
Lifting Height - 82.5" / Overall Height - 126.5"
Width - 100.25" / Length - 148.25"

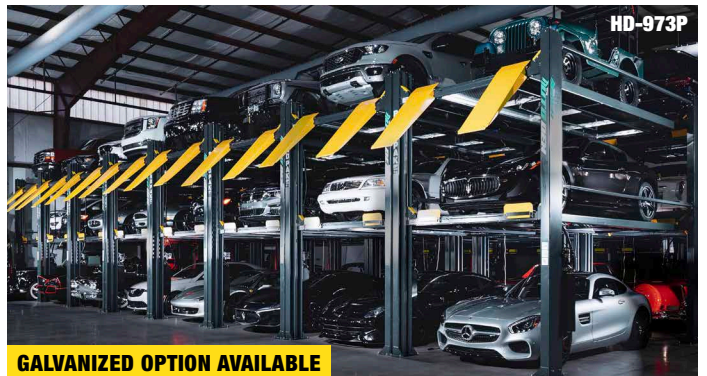

HD-973P


GALVANIZED OPTION AVAILABLE

Variability in Specifications and Features: All product specifications and features listed in this catalog are for reference only. For a more accurate and comprehensive listing of product specifications and features, visit www.bendpak.com. The contents of this catalog are subject to change.

Double Your Parking

AGS

#5175274

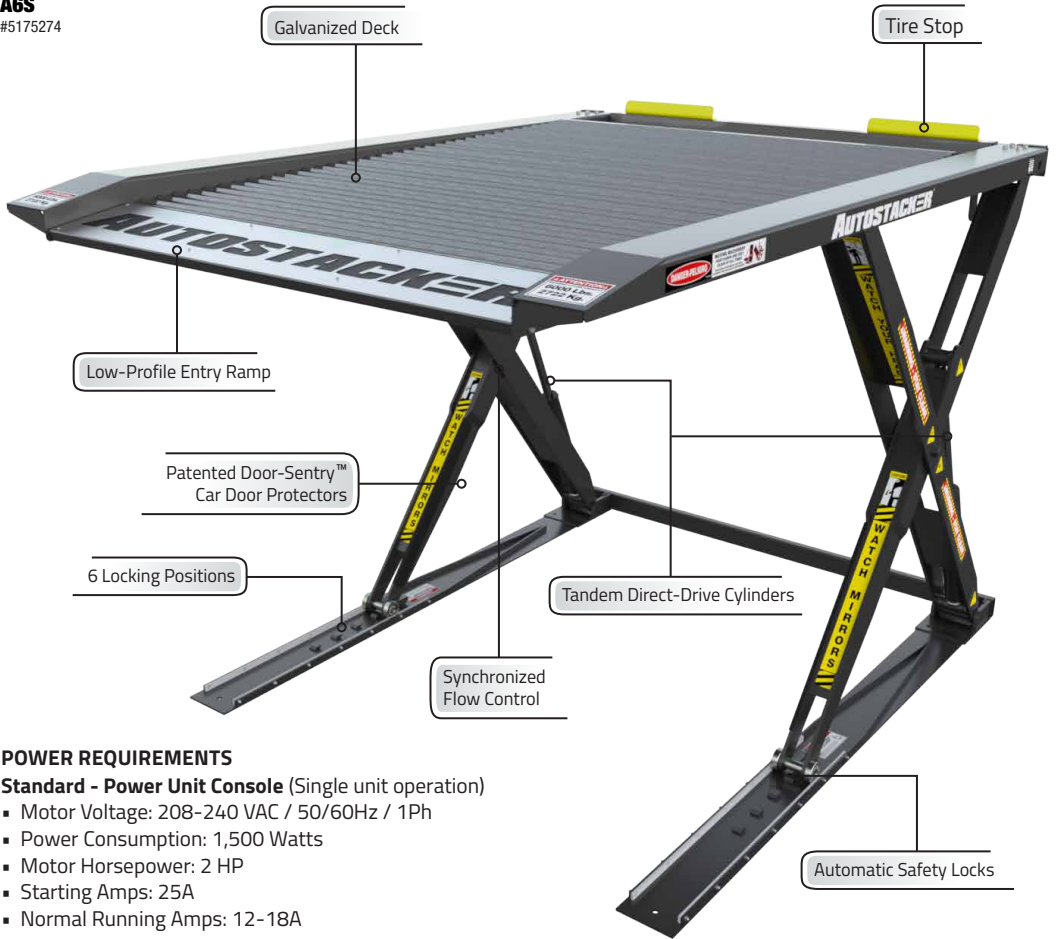

POWER REQUIREMENTS

Standard - Power Unit Console (Single unit operation)

- Motor Voltage: 208-240 VAC / 50/60Hz / 1Ph
- Power Consumption: 1,500 Watts
- Motor Horsepower: 2 HP
- Starting Amps: 25A
- Normal Running Amps: 12-18A

Optional multi-unit power unit console available (Operates up to 14 lifts)



 See it on YouTube

AUTOSTACKER



Multi-Platform Parking Lift

PL-6KT FEATURES:

- 6,000-lb. capacity per deck
- Perfect for cars, light trucks and ATVs
- Rugged I-beam and C-channel construction
- Wide base plate for maximum stability
- Superstructure features durable powder coat finish
- Dual hydraulic cylinders with heavy-duty steel lifting cable
- Heavy-duty steel construction
- Reliable electric-hydraulic power system
- Features heavy-duty 3/8" aircraft cable
- Rugged 1-1/4" roller axes
- Simple controls
- Full-width platform to keep bottom vehicles protected

PL-6KT
Triple Deck
Platform Lift
#5175154



- Lifting Capacity / Deck - 6,000 lbs.
- Overall Width - 308"
- Overall Length - 236.5"
- Platform Width - 82"
- Length of Platforms - 152"
- Drive Clearance - 93"
- Max. Rise - 89"

BendPak.



Variability in Specifications and Features: All product specifications and features listed in this catalog are for reference only. For a more accurate and comprehensive listing of product specifications and features, visit www.bendpak.com. The contents of this catalog are subject to change.

- High-speed lifting
- Oversized sheave diameter reduces cable fatigue
- Multi-position safety locks in each column
- Runways feature non-skid surface
- Independent backup slack-cable safety latches
- Built-in wheel stops





PL-12000DP
Tandem
Parking Lift
#5175547



- Lifting Capacity / Deck - 6,000 lbs.
- Overall Width - 221.5"
- Overall Length - 242.5"
- Length of Runway - 183"
- Drive Clearance - 80.5"
- Max. Rise - 82"

BendPak



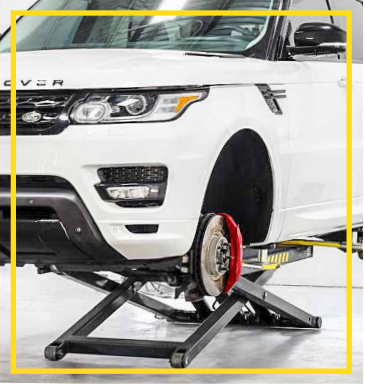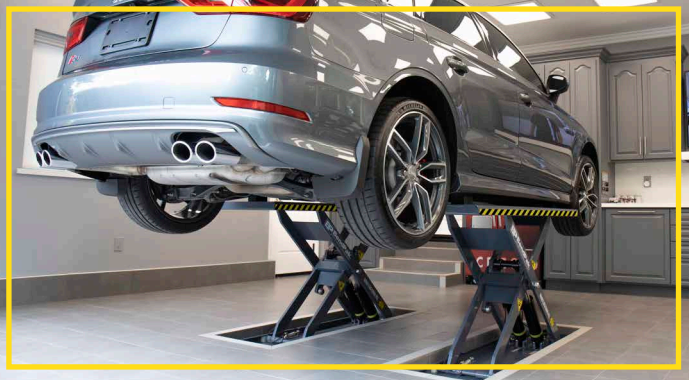

JACKPAK[®]

ULTRA2500A

The Original **and Still**
The Best.

MEGA
2500 AMPS
OF POWER!

Up To

8.5L

Gas Engines

Up To

6.5L

Diesel Engines

JackPak Model:
ULTRA2500A

NEW
ARRIVAL

JACKPAK

USB-C / USB-A



LITHIUM-ION
POWER TECHNOLOGY

FREE
GPS Asset
Tracker Included



THE PERFECT ROADSIDE HELP



JUMP STARTER
2500A



AIR INFLATOR
150PSI



LED FLASHLIGHT
300 Lumen



POWER BANK
22,800mAh

SPECIFICATIONS:

- Battery Capacity: 76Wh
- Starting Voltage: 12V
- Current: 1200A - 2500A
- Pressure Range:
10 - 150 psi
- Battery Life:
1000 Cycles
- Charging Time:
4.5 - 8 Hours

FEATURES:

- Built-In Air Compressor
- 5V USB Outlet for Small Electronic Devices
- LED Flashlight/
Emergency Signal
- Lightweight &
Compact Design
- Fits Under Seat or
Glove Compartment

INCLUDES:

- Jumper Cable Attachment
- Air Hose w/ Heavy-Duty
Nylon Abrasion Sheathing
- USB-A to USB-C Cable
- Nozzle Adapters
- Carrying Case



Check Out the Full
JACKPAK Line-up!



Pipe Benders

SERIES FEATURES:

- 3-1/3" min. bending radius
- 5" max. bending radius
- Canister style hydraulic filter
- 5 Hp / 208 - 230 VAC motor
- Manual or automatic controls
- Drop-in swaging collars
- Twist lock tooling
- ANSI 92.2 Cylinders
- Quick release bending dies
- Bending heads to within .002"
- Bending and end finishing operation
- Adjustable back gate pressure
- 180° bending capacity
- One piece solid steel barrel
- Direct drive high speed 4 GPM pump
- Tool trays
- Large fluid reservoir
- Filtered hydraulic system
- Oil sight gauges
- 1/2" high pressure hose
- Wide variety of tooling available

BB-2-DLX-601 #5115150



Bending Controls - Manual
Clampless Swager - Internal Expander
Deluxe 302 Tooling Package

1302BAS-DLX-601 #5115180



Bending Controls - Semi-Automatic
Clampless Swager - Internal Expander
Deluxe 302 Tooling Package

1302BA-DLX-601 #5115121



Bending Controls - Digital Automatic
Clampless Swager - Internal Expander
Deluxe 302 Tooling Package

BB-2-MET-503 #5115120



BB-2-MET-601 #5115122



Bending Controls - Manual
Clampless Swager - Internal Expander
Deluxe Metric Tooling Package

1302BAS-MET-503 #5115123



1302BAS-MET-601 #5115124



Bending Controls - Semi-Automatic
Clampless Swager - Internal Expander
Deluxe Metric Tooling Package

1302BA-MET-503 #5115126



1302BA-MET-601 #5115127



Bending Controls - Digital Automatic
Clampless Swager - Internal Expander
Deluxe Metric Tooling Package

300-1 Die Package

#5105570



6-Piece Set
Bends 3" OD Tubing



Air Compressors

SERIES FEATURES:

- 80 & 120 Gallon vertical tank
- 2-stage pump
- ASME rated tank
- Electric mag-starter
- Fan-type flywheel
- Fully enclosed belt guard
- Tapered roller bearings
- Forged ductile iron crankshaft
- Corrosion resistant tubing for coolers, separators and valves.
- 100% cast iron Elite pump
- Cast iron cylinders and heads with deep cooling fins
- Forced-air after cooler
- Oil sight gauge
- Automatic pressure switch
- ASME rated overload pressure safety valve
- Pressure gauge with valve
- Oversized replaceable air filters
- Automatic start / stop

5 HP MODEL

TSP-580V-601
#5179111



Voltage - 208-230 V / 60 Hz / 1 Ph
Horsepower - 5 Hp
Maximum CFM - 17 / 175 psi
Tank - 300L / 80 Gal / Vertical

7.5 HP MODEL

VMP-7580V-601
#5179112



Voltage - 208-230 V / 60 Hz / 1 Ph
Horsepower - 7.5 Hp
Maximum CFM - 26 / 175 psi
Tank - 300L / 80 Gal / Vertical

10 HP MODEL

VMP-10120V-603
#5179114



Voltage - 208-230 V / 60 Hz / 3 Ph
Horsepower - 10 Hp
Maximum CFM - 35 / 175 psi
Tank - 454L / 120 Gal / Vertical


CE ANSI

Extreme-duty four-cylinder cast iron pump

Protective pulley cover

Electric motor with cooling fan

Air cooling assembly

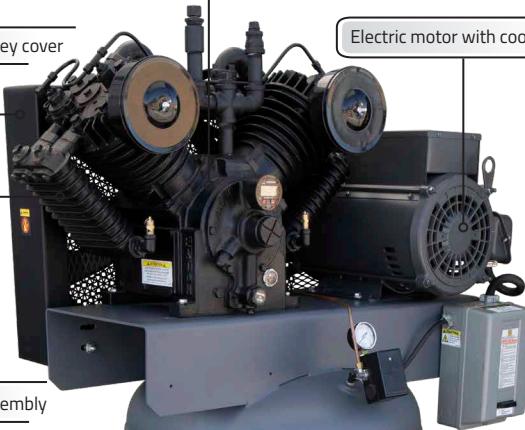

PATRIOT SERIES

PROUDLY MADE IN THE USA

When a tough application calls for rugged dependability, count on BendPak Patriot Series™ air compressors to work as hard as you do. We make all of our compressors in an ISO 9001-registered manufacturing facility in Clayton Ohio, where we ensure that every compressor delivers the durability and performance you expect. Our highly efficient Patriot Series air compressors feature rugged, low-rpm 100% cast-iron pumps, ASME tanks, copper piping for cooler operation and American made motors and starter. Made in America also means that they're are backed by one of the most comprehensive warranties in the industry.

Power Units



Power Units Explained

Ranger™ AC hydraulic power units are self-contained, dependable sources of hydraulic power that come standard with an abundance of features and benefits in a durable and economic package. These high-quality power units are ideal for industrial AC applications, such as auto lifts, elevated work platforms, scissor lifts, dock levelers, conveyors, packaging machines, machine tools, compactors, crimping machines, presses, robotic equipment, tailgate lifts, dump bodies, cab tilts, emergency backup units, snowplows, log-splitters, harvesting machinery, lift platforms, scaffolds, presses, waste compactors, car lifts, medical and dental field lifts and more.

E1.2B3F1 Power Unit

#5585435



E2.1F3H1 Power Unit

#5585285



Gal Reservoir - 1.6 / PRV - 2500
Motor - 1.5 HP / 220V - 60 Hz - 1PH
CE Listed

Gal Reservoir - 3.6 / PRV - 2650
Motor - 2.5 HP / 208-230V-50/60 Hz-1PH
UL/ETL Listed

F2.1F3H1 Power Unit

#5585280




FEATURES:

- UL / ETL Listed (except model E1.2B8F1)
- Vertical Design
- Built-in throttle and buffer valves reduce pre-load pressure
- Integrated fixed-setting pressure relief valve
- Submerged pump
- Spare pressure port
- Multi-hole adapter plate adapts to a wide variety of mounting applications
- Suction-strainer
- Breather and fill-cap



**NEED REPLACEMENT PARTS? WE HAVE THEM TOO.
CALL US TOLL FREE 1-800-253-2363**

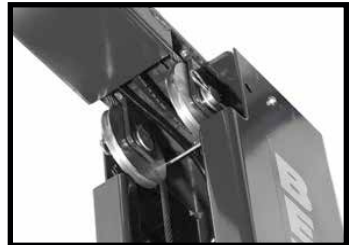

Wheel Service

DT-50A FEATURES:

- Alloy steel mount and demount head
- Single-assist tower
- High torque electric turntable
- Enhanced bead breaker blade
- Inflation gauge w/ integrated air dump valve
- Forged steel foot pedals

MB-240X FEATURES:

- Basic dynamic wheel balancing function
- Low-cost of ownership
- Computerized electronic data display for each balance
- Perfect for small garages, car-hobby garages, or a backup

DB-70 FEATURES:

- Six dynamic balancing modes and one static balancing mode
- Manual wheel offset distance setting
- Auto-start when hood is lowered
- Wheel holding manual brake pedal
- Quick-release and mount hub nut
- LED rolling wheel weight displays

DT-50 Tire Changer

#5140158



Internal Clamping - 14" - 26"
External Clamping - 12" - 22"
Maximum Tire Diameter - 47"

DT-50A Tire Changer w/ Assist Arm

#5140157



Internal Clamping - 14" - 26"
External Clamping - 12" - 22"
Maximum Tire Diameter - 47"

DB-70 Automatic Wheel Balancer

#5140159



Wheel Diameter - 10" - 28"
Max. Tire Diameter - 49"
Max Tire Weight - 150 lbs.

MB-240X Manual Wheel Balancer

#5140161



(Stand NOT Included)

Wheel Diameter - 12" - 24"
Max. Tire Diameter - 31.5"
Max Tire Weight - 150 lbs.

DT-50A & MB-240X Package Deal

#5140164



Package Includes:
DT-50A / MB-240X
(Balancer Mounts to Changer Tower)

DT-50A DB-70 & Weights Package Deal

#5140162



Package Includes:
DT-50A / DB-70
Wheel Weight Roll

Mounting Stand Fits MB-240X

#5328501



Height - 25" / Width - 23.5"
Mounting Top Plate - 16"
Cone Holders - 4 (spaced every 6")

DT-50



Tire Changers


GET MORE - SPEED - HORSEPOWER - TORQUE

Modern tires are *more* stubborn than ever. If you want to get the job done quickly and correctly than you need a tire changer that has **more**. Equipped with 220VAC, Ranger's latest tire changers deliver more of everything. With more speed, more horsepower and gobs more torque, you can break beads and swap tires on even the most difficult tires in your shop. Plus the powerful, high-torque electric turntables, increased speed and reversible direction mean quicker tire removal and installation, giving you more bang for your buck. Important accessories come standard, like a multi-piece plastic wheel protector kit that includes turntable jaw covers, bead-breaker blade boots and specialized mount/demount head covers to help protect delicate wheels. With all of the reliable features that Ranger tire changers are known for, and now even **more power**, why settle for less?

R745 Swing-Arm Tire Changer

#5140148

VOLTAGE
110VAC
OR
220VAC



NOTE:
Jet blast
bead seater
NOT INCLUDED

R76LT Tilt-Back Tire Changer

#5140144



R980XR Swing-Arm Tire Changer

#5140146



Internal Clamping - 12" - 20"
External Clamping - 10" - 16"
Maximum Tire Diameter - 36"

Internal Clamping - 10" - 30"
External Clamping - 8" - 26"
Maximum Tire Diameter - 43"

Internal Clamping - 10" - 30"
External Clamping - 8" - 26"
Maximum Tire Diameter - 50"

R980AT Swing-Arm Power Assist

#5140147



R76ATR Tilt-Back Power Assist

#5140140



RimGuard™ Wheel Clamps



Internal Clamping - 10" - 30"
External Clamping - 8" - 26"
Maximum Tire Diameter - 50"

Internal Clamping - 10" - 30"
External Clamping - 8" - 26"
Maximum Tire Diameter - 43"

R80EX Dual-Assist Tilt-Back Tire Changer

#5140139



R26FLT Super-Duty Truck Tire Changer

#5140137



RV1 Wheel Guardian™ Tire Changer

#5140138



Internal Clamping - 13" - 34"
External Clamping - 10" - 30"
Maximum Tire Diameter - 47"

Drive System - Electric / Hydraulic
Maximum Rim Diameter - 14" - 26"
Maximum Tire Diameter - 63"

Rim Diameter Range - 13" - 30"
Max. Wheel Width - 15"
Max. Tire Diameter - 47"

Variability in Specifications and Features: All product specifications and features listed in this catalog are for reference only. For a more accurate and comprehensive listing of product specifications and features, visit www.bendpak.com. The contents of this catalog are subject to change.

ACCESSORIES:



Plastic Duckhead
#5150523



ATV / Motorcycle Duckhead
#5327457



RimGuard™ Wheel Clamps
#5328311



Elevating Clamps
#5328425



RWL-150T Wheel Lift
#5150355

R80EX Dual-Assist Tilt-Back Tire Changer

#5140139



ALL RANGER TIRE CHANGERS FEATURE:
Polymer & Urethane
RimGuard™ Wheel Clamps
(Excludes R745)

See it on the BendPak / Ranger YouTube Page



Wheel Balancers

DST-2420 FEATURES:

- Dynamic, Static and Performance Alloy settings
- Automatic round-off with top-dead-center weight position indicator
- Hardened-steel 36 mm shaft
- Quick-release hub nut
- Multi-user save function

DST30P FEATURES:

- Ergonomic control board and easy-to-read LED display
- Multi-user save function
- Automatic braking
- Low RPM balancing speed and rapid six-second cycle time
- Self-calibration function

DST-64T FEATURES:

- Precision DataWand™ and inner data arm
- Low RPM balancing speed and rapid six-second cycle time
- Automatic braking
- LED inner wheel target light
- Manual or automatic start
- Self-calibration function

DST-2420
Wheel Balancer
#5140156



DUAL VOLTAGE
110V / 220V

Max. Wheel Diameter - 10" - 30"
Max. Tire Diameter - 47"
Max. Tire Weight - 145 lbs.

DST30P
Wheel Balancer
#5140154



DUAL VOLTAGE
110V / 220V

Max. Wheel Diameter - 8" - 30"
Max. Tire Diameter - 50"
Max. Tire Weight - 150 lbs.

DST-64T
Wheel Balancer
3D Quick-Touch™
DataWand™
#5140152



VOLTAGE
220VAC

Max. Wheel Diameter - 10" - 30"
Max. Tire Diameter - 50"
Max. Tire Weight - 150 lbs.

DST642D
Wheel Balancer
#5140153



VOLTAGE
220VAC

Max. Wheel Diameter - 10" - 30"
Max. Tire Diameter - 50"
Max. Tire Weight - 150 lbs.

RB24T
Truck Wheel Balancer
#5140149



VOLTAGE
380VAC

Max. Wheel Diameter - 30"
Max. Tire Diameter - 50"
Max. Tire Weight - 400 lbs.



FREE wheel weight
starter kit included
with all balancers

Truck Cone Kit
#5150555



Double-sided centering cone fits
hub sizes 4.75" - 6.75"

Motorcycle Shaft Kit
#5150320



Fits DST-2420 and DST-64T
Includes: Universal wheel clamp, shaft,
centering cones, spacers and spin-on nut

Lug Bolt Kit
#5150020



8-pc. kit
Includes: Centering pin adapters, flange
plate kit and measuring caliper

Wheel Balancers Features & Specifications

Laser-Spot Balancer

INFORMATION:

The Ranger LS43B wheel balancer handles wheels up to 43 inches in diameter. The average cycle time is just 7 seconds, making it one of the fastest and most reliable balancing machines ever built. Top-of-the-line technology and features take all of the guesswork and human error out of wheel balancing. The standout feature on this model, of course, is Ranger's exclusive 3D Quick-Touch™ Laser-Spot™ technology. Using this feature the LS43B highlights the pinpoint location at which operators should place the minimal amount of weight in order to achieve a perfect balance at the 6 o'clock position.

LS43B FEATURES:

- Dynamic, Static and Performance Alloy settings
- Manual or automatic start
- Automatic braking
- Low RPM balancing speed and rapid six-second cycle time
- Self-calibration function

LS43B Wheel Balancer 3D Quick-Touch™ Laser-Spot™

#5140151

Max. Wheel Diameter - 10" - 30"
Max. Tire Diameter - 47"
Max. Tire Weight - 145 lbs.
Wheel Width Cpty. - 2" - 18"
Balancing Speed - 180 RPM

**DUAL
VOLTAGE**
110V / 220V

Includes FREE Wheel
Weight Starter Kit

INCLUDES TOOLING KIT



OPTIONAL Clip-On Steel Wheel Weights

Sold separately



25 ea.

0.25oz, 0.50oz, 0.75oz, 1oz, 1.25oz, 1.5oz,
1.75oz, 2oz, 2.25oz, 2.5oz, 2.75oz, 3oz

LED Wheel Weight Displays

DataWand™ for Automatic
Wheel Data Entry

User-Friendly Operation

Laser-Spot™ Technology



Brake Lathes

RL-8500XLT FEATURES:

- Extended capacity spindle can be used on brake drums 10" deep
- Rear bushing location provides extra support for the arbor
- Capable of truing even the heaviest drum rotors
- Optional truck adapter kit available
- Simple ergonomic controls designed for minimal operator movement
- Precision electric DC servo motors designed to meet the demanding requirements of industrial motion control
- Quick-Change Adapter-Plus system
- Works on all cars or trucks, both foreign and domestic, with hubless drums, rotors (center hole sized 2-5/32" – 4") and composite rotors (center hole sized 4" – 6.25")
- Precision twin cutter tools and a quick drum-to-rotor changeover

RL-8500XLT Combination Brake Lathe Package Super-Duty

#5150080



Max. Rotor Thickness - 2.5"
Max. Rotor Diameter - 17"
Max. Drum Diameter - 28"

Light & Medium Truck Adapter Set

#5150171



A) Small Truck Cone - 4.125" x 5.25"
B) Large Truck Cone - 5.125" x 6.25"
C) Truck Plate - 7.40" OD

Brake Lathe Truck Adapter Kit


#5150161



Fully Equipped Multi-Piece Set
Accommodates Medium & Full Size Trucks

RL-8500 Combination Brake Lathe Package

#5150066

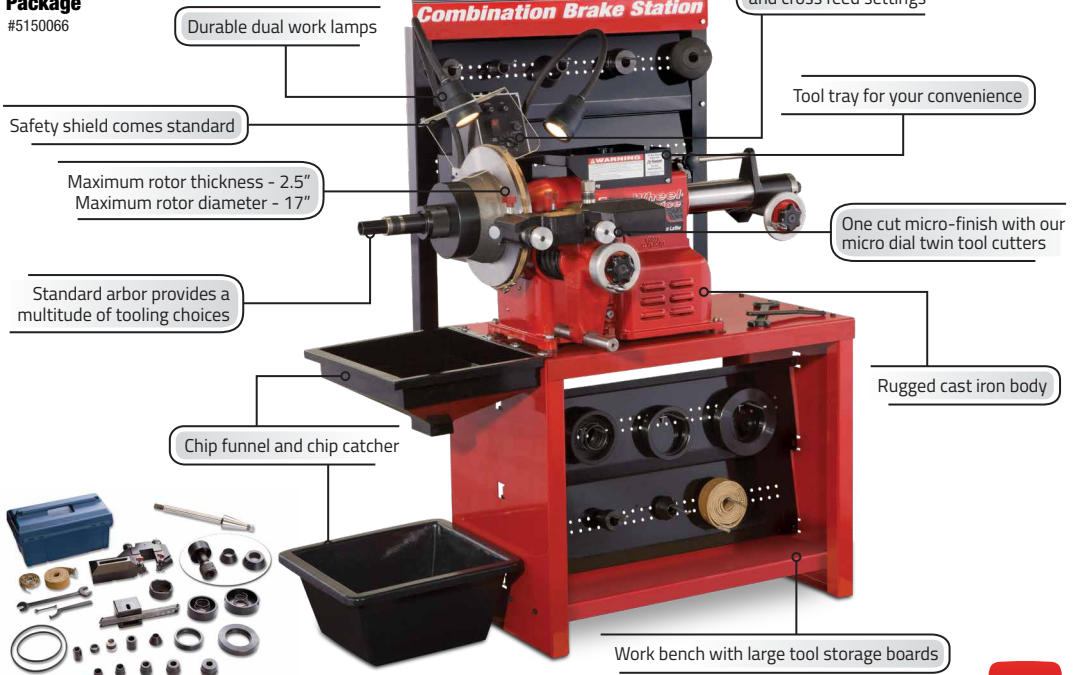

Durable dual work lamps

Infinitely variable spindle and cross feed settings

Safety shield comes standard

Tool tray for your convenience

Maximum rotor thickness - 2.5"
Maximum rotor diameter - 17"

One cut micro-finish with our micro dial twin tool cutters

Standard arbor provides a multitude of tooling choices

Rugged cast iron body

Chip funnel and chip catcher

Work bench with large tool storage boards

Fully equipped tool package comes standard


See it on the BendPak / Ranger YouTube Page



Wheel Aligner

3DP4100R FEATURES:

- User-Friendly and Time Saving Features
- Self-balancing, variable height camera lift system is built with precision bearing slides for easy adjustment
- High-resolution drive-on approach camera provides full on-screen frontal view of vehicle driving on lift platforms
- Commercial-grade cameras are designed with full frame optical lenses that ensure accuracy and stability




3DP4100R
Target 3D Pro™
3D Imaging
Wheel Aligner
 #5140101



FREE SET-UP & ON-SITE TRAINING



Power Requirements:
 115 VAC, 1Ph, 50/60 Hz, 8 amp
 230 VAC, 1Ph, 50/60 Hz, 8 amp

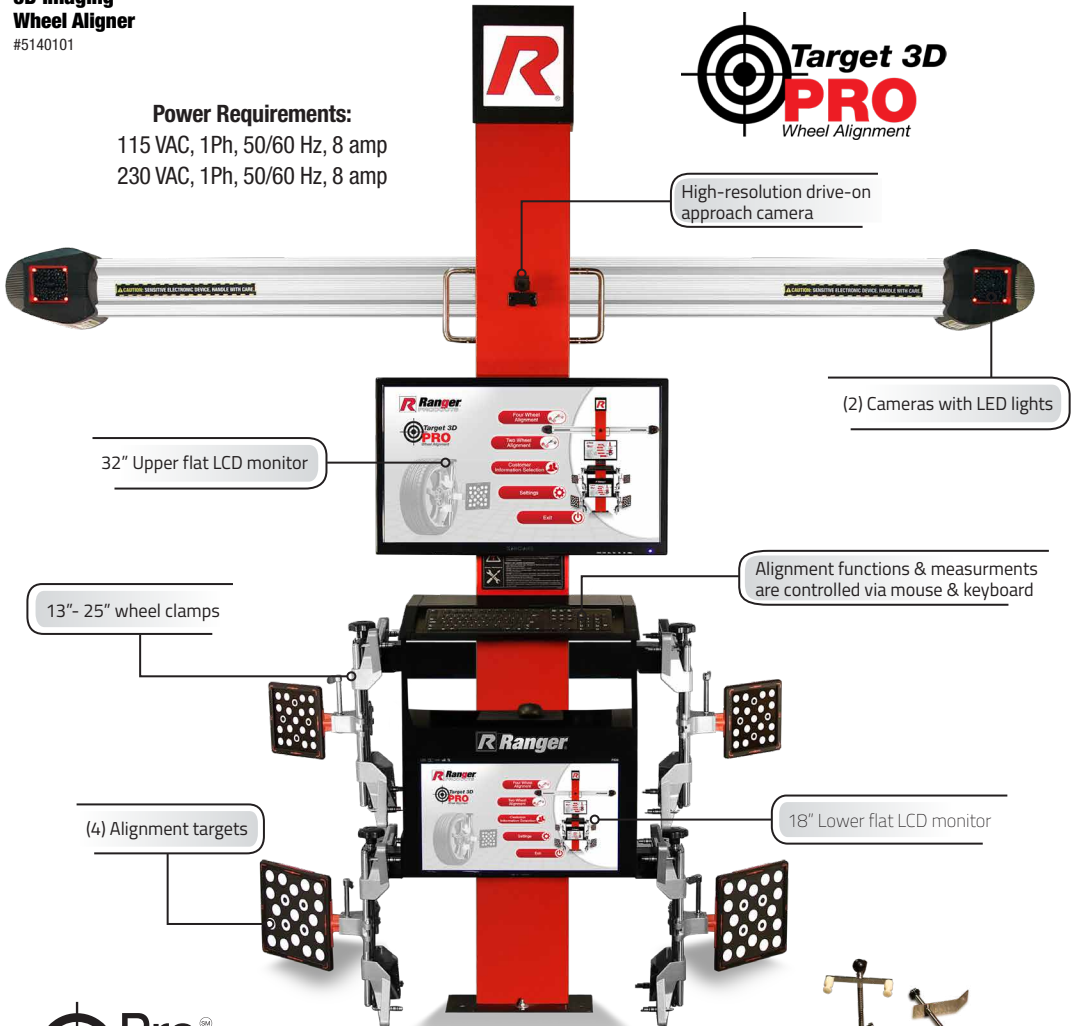

INCLUDES:

- Steering wheel lock
- Brake pedal depressor



Jacks & Lifting

INFORMATION:

Ranger's wide array of multi-purpose floor jacks just keeps getting larger and more diverse. Our floor jacks have maximum capacities ranging from 3,000 to 60,000 lbs. and come in a variety of styles, like quick-pump and low-profile. No matter which one you choose, Ranger floor jacks offer incredible lifting power and top-notch construction that you can count on to never let you down. Our impressive line of floor jacks are carefully designed to accommodate a wide spectrum of weight capacities and lifting applications, easily lifting just about anything that needs service.

RFJ-3000AL
1.5 Ton Aluminum
Racing Floor Jack


#5150061



Capacity - 3,000 lbs.
Height - 3.5" - 17.5"
Chassis Length - 24"

RFJ-3000LPF
1.5 Ton Super-Long
Floor Jack

#5150060



Capacity - 3,000 lbs.
Height - 2.75" - 24"
Chassis Length - 34"

RFJ-4000AL
2 Ton Aluminum
Racing Floor Jack

#5150085



Capacity - 4,000 lbs.
Height - 3.5" - 17.75"
Chassis Length - 24"

RFJ-5000HD
2.5 Ton Heavy-Duty
Commercial Grade
Floor Jack

#5150056



Capacity - 5,000 lbs.
Height - 3" - 20"
Chassis Length - 26"

RFJ-3TP
3 Ton Professional
Floor Jack

#5150440



Capacity - 6,000 lbs.
Height - 5.25" - 19.25"
Chassis Length - 26"



RFJ-3000LPF

RFJ-3T
3 Ton Racing Style
Floor Jack / Plunger-U-Joint

#5150414



Capacity - 6,000 lbs.
Height - 4.75" - 20.5"
Chassis Length - 28"

RFJ-3TQP
3 Ton Quick-Pump
Floor Jack

#5150418



Capacity - 6,000 lbs.
Height - 5" - 19.75"
Chassis Length - 25.5"



RFJ-4000AL

Variability in Specifications and Features: All product specifications and features listed in this catalog are for reference only. For a more accurate and comprehensive listing of product specifications and features, visit www.bendpak.com. The contents of this catalog are subject to change.

GALLERY:



RFJ-6HD
3 Ton "Low Rider"
Floor Jack

#5150446



Capacity - 6,000 lbs.
Height - 3.625" - 21"
Chassis Length - 27"

RFJ-10TL
10 Ton Long Frame
Floor Jack

#5150434



Capacity - 20,000 lbs.
Height - 7" - 23"
Chassis Length - 61"

RBJ-30TL
30 Ton Telescoping
Air Bottle Jack

#5150443



Capacity 1st Stage - 60,000 lbs.
Capacity 2nd Stage - 30,000 lbs.
Height - 6.5" - 12" / Chassis Length - 22.5"

RTJ-1100
1/2 Ton
Transmission
Jack

#5150442



Capacity - 1,100 lbs.
Height - 45" - 72"
Base - 24" x 24"

RTJ-1
1 Ton
Transmission
Jack

#5150404



Capacity 1st Stage - 2,000 lbs.
Capacity 2nd Stage - 1,000 lbs.
Height - 37" - 73" / Base - 39" x 39"

RTJ-3000
1.5 Ton
Transmission
Jack

#5150406



Capacity 1st Stage - 3,000 lbs.
Capacity 2nd Stage - 2,000 lbs.
Height - 35.5" - 71.5" / Base - 34" x 34"



RFJ-4000AL

Jacks & Lifting

SERIES FEATURES:

- Welded steel construction for maximum durability
- Safety ratchet design ensures stands remain locked under load
- Perfect for holding drivetrain or exhaust components in position
- Sold in pairs
- Quick-adjust spin handle with thrust bearing
- Wide base provides maximum stability
- Thick, rubber adjustable pad for maximum support
- Convenient handle and column release
- Hardened ACME screw for easy adjustment
- Tripod design evenly distributes weight
- Pneumatically operated wheel lift
- One-handed lever control
- Heavy-duty steel casters
- Bearing mounted slider
- Stabilizes vehicles raised on lifts
- Heavy-steel construction for maximum durability

RJS-3T 3 Ton Jack Stands (Set of 2)

#5150115



Holding Capacity - 6,000 lbs.
Height - 11.5" - 17"
Base Dimensions - 7" x 7.5"

RJS-6T 6 Ton Jack Stands (Set of 2)

#5150120



Holding Capacity - 12,000 lbs.
Height - 15.5" - 24.5"
Base Dimensions - 9" x 10.5"



RJS-3T

RJS-1T High Reach Jack Stand

#5150183



Holding Capacity - 1,650 lbs.
Height - 54.5" - 80.5"
Base Dimensions - 12" Diameter

RJS-1TF High Reach Jack Stand Foot Operated

#5150185



Holding Capacity - 1,650 lbs.
Height - 54.5" - 80.5"
Base Dimensions - 12" Diameter

RJS-2TH Tripod Jack Stand

#5150125



Holding Capacity - 4,000 lbs.
Height - 55" - 87"
Base Dimensions - 24" x 24"

MLS-18 Mobile Jack Stand

#5175001



Holding Capacity - 18,000 lbs.
Height - 48.75" - 74.5"
Base Diameter - 32"

RWL-150T Pneumatic Wheel Lift

#5150355



Fits R980XR & R980AT

Lifting Capacity - 150 lbs.
Pneumatic Operation
Welded Steel Construction



RWL-150T

Lifting Features & Specifications

Motorcycle Lifts

SERIES FEATURES:

- Constructed out of 12-gauge steel
- Pneumatic lifting cylinder
- Durable powder coat finish
- Adjustable front wheel vise
- Drop-away rear wheel deck
- Easy ramp(s) removal
- Front and side extensions standard
- Built-in retractable swivel casters
- Full travel automatic safety locks
- Single hydraulic lifting cylinder
- Side decks can be easily removed
- Diamond-plate approach ramps
- Air powered hydraulic pump operation
- Multiple locking positions



**RML-1500XL
Extended
Motorcycle
Lift**
#5150605




Lifting Capacity - 1,500 lbs.
Height - 7.75" - 45" / Table Width - 29.5" - 51"
Table Length - 79.5" - 99.75"

**RML-1100
Motorcycle Jack**
#5150071



Lifting Capacity - 1,100 lbs.
Height - 3.5" - 16"
Top Dimensions - 6" - 17.75"

RML-1500XL

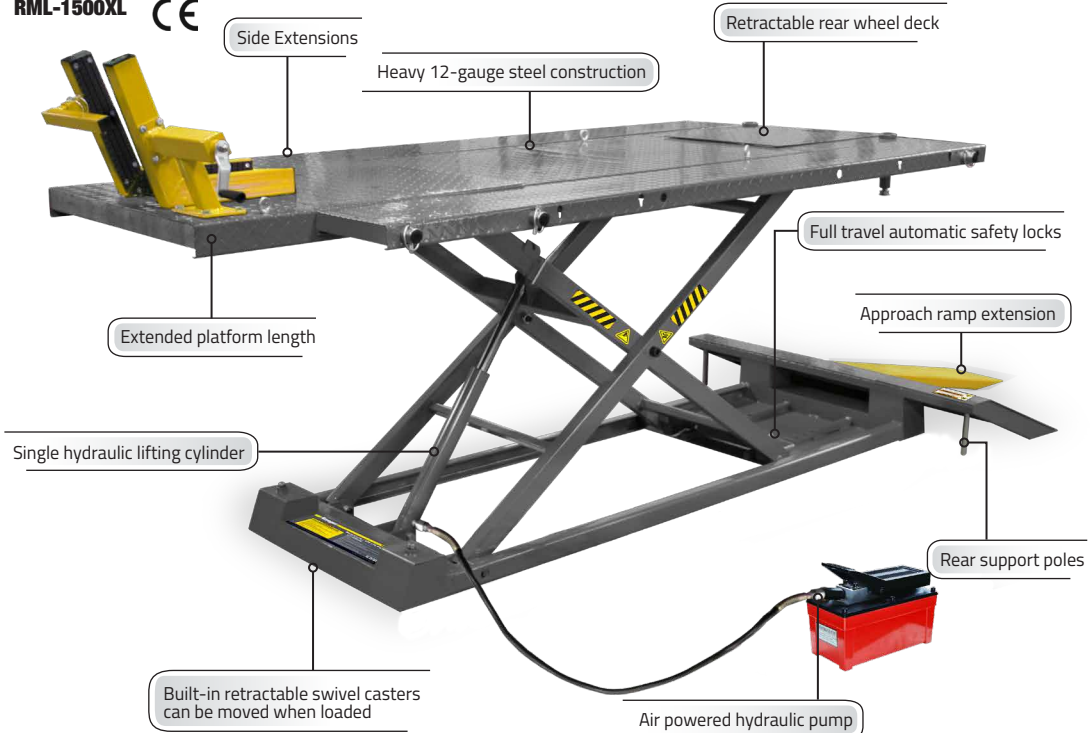

Shop Equipment

INFORMATION:

Let Ranger Products lighten the load with our considerable line of high-quality rolling equipment. All Ranger Carts and Dollies are made from high-gauge steel and employ only the best casters for easy maneuvering. Our service carts, chassis-mount vehicle dollies, low-profile automobile carts and rolling adjustable work tables come fully equipped to make your day in the garage infinitely easier. Don't lift or carry—roll with Ranger!

Ranger's industrial shop presses offer you the versatility of professional-grade hydraulic force, whether you're at the shop or in your own garage. Among other operations, all Ranger Hydraulic Presses are ideal for the removal and installation of gears, bushings and bearings—so you can bend, straighten, flatten, crush, press, shape, push, pull, lift and spread like you were born doing it.

RCD-1TD Wheel Dolly Auto Carts

#5150190



Capacity - 1,000 lbs. (Each)
Dimensions - 15.5" x 23.5"
3.5" Cast Iron Ball Bearing Casters

RCD-2V 4,400-lb. Capacity Vehicle Dolly

#5150409



Lifting Capacity - 4,400 lbs. (Each)
Overall Height - 10"
Caster Size - 4.5"

RP-20T Bottle Jack Shop Press

#5150496



Capacity - 40,000 lbs.
Cylinder Stroke - 8"
Width - 23" / Height - 59"

RCD-1500 GoCart™ Vehicle Dolly

#5150595



(Sold as Pair)

Load Rating Each - 1,500 lbs.
Tire Width Capacity - 12"
Tire Diameter Capacity - 15" - 28"

RCD-1500EX GoCart™ Vehicle Dolly Extended

#5150191



(Sold as Pair)

Load Rating Each - 1,500 lbs.
Tire Width Capacity - 13"
Tire Diameter Capacity - 19" - 37"

RP-20HD Hydraulic Shop Press

#5150059



Capacity - 40,000 lbs.
Cylinder Stroke - 5.5"
Width - 37" / Height - 60.25"

GoCart™ Storage Rack

#5150600



Load Rating - 200 lbs.
Dimensions - 19" x 31" x 9"
Holds up to 4 GoCart™ Dollies



Integrated 4" diameter
20-ton pressure gauge

Hydraulic cylinder moves laterally

Adjustable table height

RP-20HD

Variability in Specifications and Features: All product specifications and features listed in this catalog are for reference only. For a more accurate and comprehensive listing of product specifications and features, visit www.bendpak.com. The contents of this catalog are subject to change.

RWB-2D FEATURES:

- Electrostatic triple-baked protective powder coat
- Rolled edges for added strength and rigidity
- Full-extension ball bearing drawer slides
- Tumbler key-lock pivot drawer latching system

RWB-2S FEATURES:

- Glossy red finish
- Electrostatic oven-baked powder coat
- Rolled edges for added strength and rigidity
- 5/32" HD rolled edge steel table top
- 3/32" HD rolled edge steel shelves
- 12-gauge construction

RWB-1TD FEATURES:

- Lockable heavy-duty drawer
- 500-lb. working capacity
- Heavy-duty 4" casters
- Adjustable working height
- Removable polyethylene fluid drain
- 14-gauge table top
- 3/4" liquid containing rim

RWB-2D
2-Drawer Work Bench
#5145330



Height - 34.5"
Width - 59"
Depth - 25.25"

RWB-2S
2-Shelf Work Bench
#5145335




Height - 34.5"
Width - 79"
Depth - 25.25"

RWB-1TD
Work Bench w/Fluid Catcher
#5145336





Height - 40"
Width - 48"
Depth - 32"

RH-50PL
Hose Reel
#5150211



Air Pressure - 300 psi
Hose Length - 50'
Fittings - 3/8"

RH-50PL

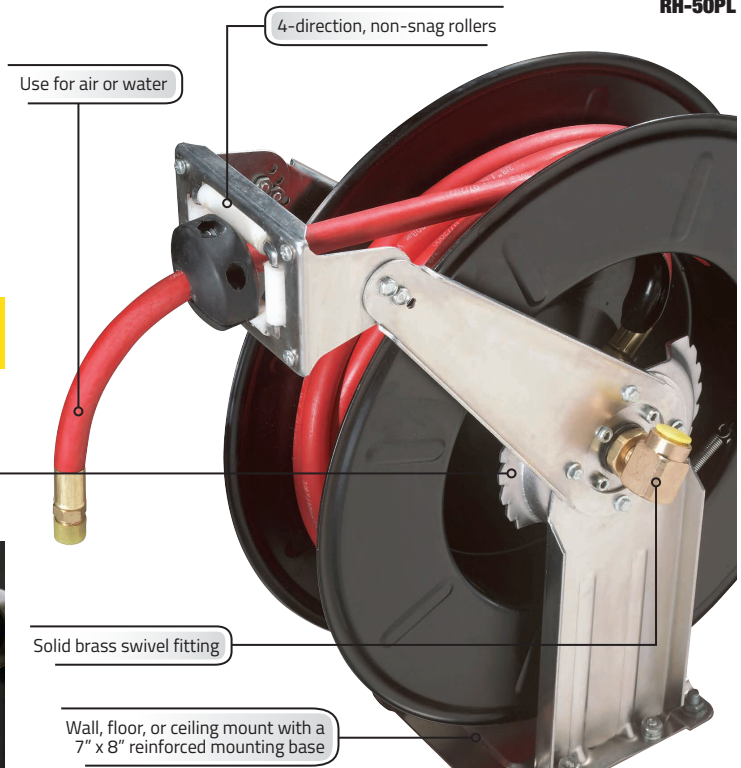

Shop Equipment

SERIES FEATURES:

Oil Drains

- Lightweight for easy portability
- Safe and easy to use
- Non-corrosive telescoping tube
- Heavy-duty stainless steel clamp
- Built-in hand grips
- Durable steel construction

- Tough construction will resist dents, rust, and corrosion
- Rugged funnel with built-in contamination screen

Oil Filter Crushers

- Reduces cans up to 20%
- Reduces filters up to 25%

- Crushes cans in only 15 seconds
- Hydraulic powered (20FC air operated)
- Fulfills EPA and other mandated environmental standards
- Removes up to 95% of the oil
- Compact floor or bench-mount design
- All-steel industrial construction

RD-9G
9-Gallon
Oil Drain
#5150997



Capacity - 9 gal.
Height - 32" - 64"
Funnel Diameter - 18"

RD-18G
18-Gallon
Oil Drain
with Pump
#5150995



Capacity - 18 gal.
Height - 56" - 72"
Evacuation Pump

RD-15
15-Gallon
Low-Profile
Oil Drain
#5150206



Capacity - 15 gal.
Height - 8.5"
Shipping Weight - 43 lbs.

RD-20SE
20-Gallon
Air-Evac
Oil Drain
#5150996



Capacity - 20 gal.
Height - 52" - 83"
Funnel Diameter - 16"

RP-20FC
Oil Filter
Crusher
with Stand
#5150067



(Barrel not included)

Capacity - 10 Ton / Cycle Time - 15 - 20 sec.
Air Requirements - 125 - 175 psi
Dimensions - 29.5" x 17" x 17"

RP-30FCH
Electric / Hydraulic
Oil Filter Crusher
with Stand
#5150008



Capacity - 15 Ton / Cycle Time - 8 - 15 sec.
Power Supply - 208-240V / 50/60Hz / 1 Ph
Dimensions - 75" x 42.5" x 17"

RP-50FC
Heavy-Duty
Oil Filter
Crusher
with Stand
#5150401



(Barrel not included)

Capacity - 25 Ton / Cycle Time - 8 - 15 sec.
Power Supply - 208-240V / 50/60Hz / 1 Ph
Dimensions - 90.5" x 32.5" x 31.5"



See it on the BendPak / Ranger YouTube Page

Variability in Specifications and Features: All product specifications and features listed in this catalog are for reference only. For a more accurate and comprehensive listing of product specifications and features, visit www.bendpak.com. The contents of this catalog are subject to change.

RS-500D / RS-750D FEATURES:

- Heavy-duty steel construction
- Removable tank screen
- Stainless oil skimmer
- Removable parts tree
- Powder coat finish
- Brass nozzles
- Full opening octagonal door
- Large drain pipe
- Heavy-duty rubber casters
- Friction-drive turntable system
- Gasket-free door
- Small parts basket
- Stainless steel handles
- FREE bucket of soap included

SOAP FEATURES:

- Non-foaming soap
- Low pH
- Mild alkali
- Water soluble
- Specially formulated
- Removes grease, oil, stains, carbon, protein and some paints

RS-500D Spray Wash Cabinet

#5155117

**FREE 20-lb.
Soap Bucket**



Load Capacity - 500 lbs.
Tank Capacity - 50 gal.
Interior Dimensions - 43" x 32"

RS-750D Spray Wash Cabinet (Truck)

#5155118

**FREE 20-lb.
Soap Bucket**



Load Capacity - 1,000 lbs.
Tank Capacity - 53 gal.
Interior Dimensions - 32" x 54"

Aluma-Klean Detergent

20 lbs. #5155096

50 lbs. #5155100



Low pH
Water soluble
Non foaming soap


STAINLESS STEEL OPTION AVAILABLE

RS-500DS Stainless Steel Spray Wash Cabinet

#5155051

RS-750DS Stainless Steel Spray Wash Cabinet

#5155052

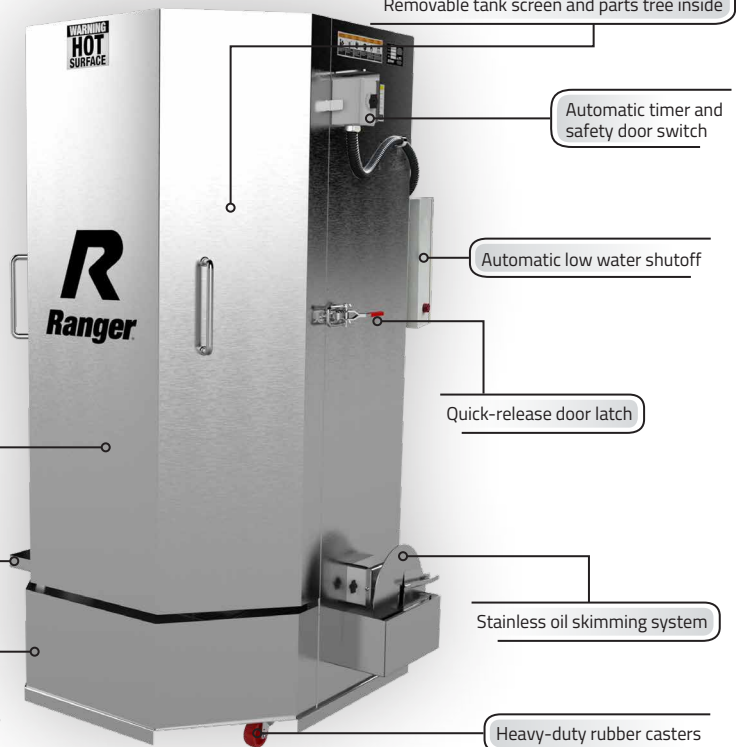

See it on the BendPak / Ranger YouTube Page

Shop Equipment

RWS-1B FEATURES:

Bubble Balancer

- Rugged die-cast aluminum head cone
- Easy to use self-leveling stand
- Built-in weight-storage compartments
- Self-aligning, spring-loaded cone
- Hardened cast pivot seat
- Recessed circular level bubble

RWS-1B Bubble Wheel Balancer

#5156100



Hub Hole Diameter - 1.5" - 4.5"
Calibrated at - 90°- 180°- 270°- 360°
Width - 12" / Height - 23"

RWS-3TC FEATURES:

Manual Tire Changer

- Heavy steel construction for maximum durability
- Efficient operation at a fraction of the cost
- Performs both mounting and bead breaking operations

RWS-3TC Manual Tire Changer

#5150400



Tire Capacity - 8" - 7.5" x 16"
Wheel Plate Diameter - 7.5"
Base Dimensions - 15" x 18"

RST-1WS Features:

Rolling Work Seat

- Padded seat
- Swivel casters for easy maneuverability
- Relieves sore back muscles
- Work more efficiently
- Sturdy steel tubing construction
- Low profile design

RST-1WS Rolling Work Seat

#5150514



Steel Tubing - 1"
Swivel Casters - 2.5"
Relieves sore back muscles

Clip-On Steel Wheel Weights



0.25oz, 0.75oz, 1oz, 1.25oz, 1.5oz, 1.75oz,
2oz, 2.25oz, 2.5oz, 2.75oz, 3oz
Qty. - 25 ea.

Ergo-RS Creep Chair

#5215988



Max Capacity - 350 lbs.
Max Seat Height - 21" / Min Height 5.7"
Collapsed Length - 56"

Ergo-RS



Six Seat Locking Positions - 0° to 75°



Variability in Specifications and Features: All product specifications and features listed in this catalog are for reference only. For a more accurate and comprehensive listing of product specifications and features, visit www.bendpak.com. The contents of this catalog are subject to change.

RST-500ES FEATURES:

- Adjusts to fit all vehicles
- Rubber foot pads to hold load securely
- Straddles inner fender wells
- Precisely positions engine for easy gear box and transmission removal
- Perfect for 4 and 6 cylinder engines
- Folds upright to conserve space

RES-1TF Features

- Heavy steel construction
- Long rubber-grip handle
- Head swivels 360° for easy positioning
- Heavy-duty swivel casters
- Slotted adjustable saddle permits quick and easy installation
- Neck is reinforced for extra strength

RSC-2TF FEATURES:

- Designed for shops with limited space
- Folds for easy storage
- Heavy-duty steel casters
- Neck is reinforced for extra strength
- Wide base for maximum stability
- Telescoping boom provides 4 positions
- Heavy steel construction

RST-500ES Engine Support

#5150103



Holding Capacity - 1,500 lbs.
Screw Travel - 13"
Adjustable Width - 40" - 63"

RES-1TF Engine Stand

#5150470



Holding Capacity - 2,000 lbs.
Front Width - 31" / Rear Width - 27.5"
Height - 37.5" / Length - 41"

RSC-2TF Folding Shop Crane

#5150105



Boom Length - 40" - 63"
Boom Capacity - 1,100 - 4,400 lbs.
Boom Height - 80" - 93"

RIC-4716 Inflation Cage

#5150315



Max Tire Width - 16"
Max Tire Diameter - 47"
Solid-steel welded-steel base

AC-134A

A/C Pressure adjustment

Electric database

Flushing function for rapid discharge of used coolant

R134a Refrigerant

Meets UL 1963 & SAE J2788 Standards

Automatic oil discharge

A/C Recovery Machine

#5150025



Refrigerant: R134a
Car, truck, SUV and bus compatibility
Tank Capacity - 50 lbs.



CoolCharge

Portable Air Coolers


COOLBREEZE SERIES FEATURES:

- Oscillating swing-louvers
- Blue Flex™ axial flow fan
- User-friendly controls
- Three-speed fan
- Water inlet flow control
- Standard power supply - 110V / 60 Hz / 1 Ph
- Honeycool™ evaporative media



- Durable swivel casters
- Constant water inlet
- Protective cover comes standard
- Space-saving design
- Extra-long power cord
- GFCI plug
- UL® Certified

SWING-LOUVERS



CB-12SL Portable Evaporative Air Cooler

#5150018



OPTIONAL
208-230V
Model
CB-12SLH
#5150017

Fan Diameter - 12"
Water Capacity - 15 Gal
Max. Airflow - 1,565 CFM

CB-14SL Portable Evaporative Air Cooler

#5150030



OPTIONAL
208-230V
Model
CB-14SLH
#5150031

Fan Diameter - 14"
Water Capacity - 15.6 Gal
Max. Airflow - 2,300 CFM

CB-26SL Portable Evaporative Air Cooler


#5150026



OPTIONAL
208-230V
Model
CB-26SLH
#5150037


Fan Diameter - 26"
Water Capacity - 50 Gal
Max. Airflow - 6,027 CFM

OPTIONAL ACCESSORY:



This easy-to-install magnetic filter conditions the water before it reaches your air cooler. Housed in a durable stainless steel cylinder, it helps remove odors and scale-build-up.

Water Drip System

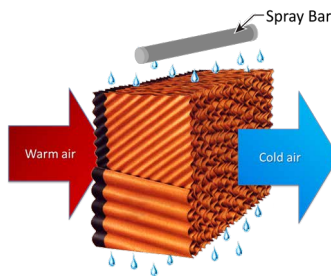

Cool Boss Protective Cover

Small - #5326303
Medium - #5326304
Large - #5326305



Small Fits - CB-16
Medium Fits - CB-28
Large Fits - CB-36



Industrial



Commercial



Residential

Variability in Specifications and Features: All product specifications and features listed in this catalog are for reference only. For a more accurate and comprehensive listing of product specifications and features, visit www.bendpak.com. The contents of this catalog are subject to change.

COOLBLAST SERIES FEATURES:

- Remote control with a convenient holder
- Automatic water source shutoff
- Water inlet flow control
- Durable ABS plastic shell construction
- Variable-speed fan
- Standard power supply - 110V / 60 Hz / 1 Ph
- Honeycool™ evaporative media
- Bluetooth® audio player
- Built-in speakers
- Anion negative ion air purifier
- LED Floodlight
- Space-saving design
- Soft-touch LED controls
- Antibacterial housing
- Durable swivel casters
- 360° handle
- Protective cover comes standard
- Built-in timer
- Extra-long power cord
- GFCI plug
- UL® Certified

CB-16L Portable Evaporative Air Cooler

#5150151



OPTIONAL
208-230V
Model
CB-16H
#5150176

Fan Diameter - 16"
Water Capacity - 60 Gal
Max. Airflow - 4,950 CFM

CB-28L Portable Evaporative Air Cooler

#5150152



OPTIONAL
208-230V
Model
CB-28H
#5150177

Fan Diameter - 28"
Water Capacity - 80 Gal
Max. Airflow - 9,020 CFM

CB-36L Portable Evaporative Air Cooler

#5150153



OPTIONAL
208-230V
Model
CB-36H
#5150178

Fan Diameter - 36"
Water Capacity - 115 Gal
Max. Airflow - 12,615 CFM

OPTIONAL ACCESSORY:

CB-16 Duct Kit

Get the most out of the CB-16 with the Ducting Kit. Direct refreshing air precisely where you need it.

Length: 15 ft
Material: Flexible Reinforced Polyvinyl Duct

5150236



NEW!




Manufacturing Superiority

Medium and Heavy-Duty Products

BendPak recognizes the manufacturing process as our moment of maximum influence. When we ship a piece of equipment, we need to know that the product leaving our manufacturing complex is the best it could be. That's why we demand nothing short of the very finest in facilities and machinery. Our primary factory houses development and manufacturing for medium and heavy-duty lifting products and wheel service models. At just over 300,000 square ft., it's designed for maximum efficiency and safety. Plus, we consistently employ the best steel fabrication techniques in the world.

Main Production Facility

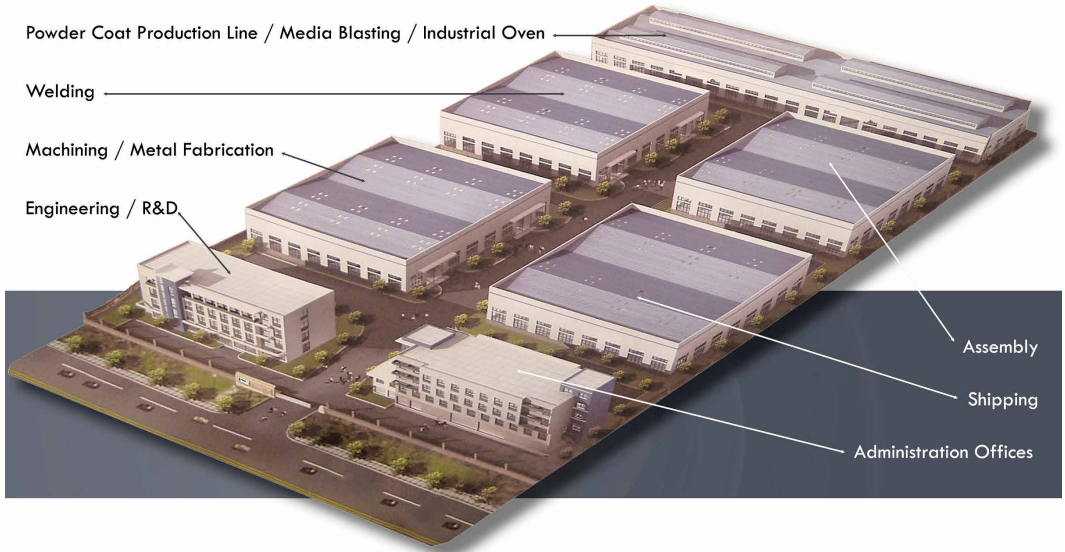

Light and Medium-Duty Products

BendPak's second mega-sized manufacturing facility is used primarily for the fabrication of light and medium-duty lift products, select parking systems and vehicle repair tools and equipment. The multiplex factory houses state-of-the-art equipment including, numerically-controlled turning and milling equipment and automated welding systems. Full-capability services like comprehensive metallurgy testing, heat treatment, automated powder coating and other specialty operations take place here as well. The facility also houses assembly and packaging operation centers and product development testing labs for BendPak's growing customer base around the globe.




Variability in Specifications and Features: All product specifications and features listed in this catalog are for reference only. For a more accurate and comprehensive listing of product specifications and features, visit www.bendpak.com. The contents of this catalog are subject to change.

New Alabama Facility Speeds up Shipping



BendPak recently announced the opening of a new 100,000 square-foot distribution center near Mobile, Alabama, to better serve customers in the eastern United States. The administrative and shipping complex, which is expected to be fully operational within 60 days, is located in Theodore, just a short drive from the expanding Port of Mobile. The new facility has easy access to three major interstates and five Class I railroads, helping BendPak to deliver products same-day or next-day to more customers in the eastern half of the country.

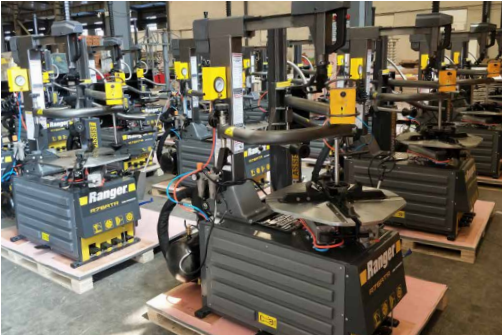

BendPak/Ranger products and related marks are trademarks and/or registered trademarks of BendPak Inc.

Safe Practices are Best Practices

Our multi-department manufacturing complexes have allowed us to expand both machinery and employees to triple our daily production capacity. All BendPak employees are Q.C. trained and follow rigid ISO-9001 guidelines. Every day, more than 700 employees around the world dedicate themselves to putting our core values into action. Safety is first—it's our company's top priority, followed closely by environmental responsibility, cost-efficiency, quality, customer service and accountability for all departments. These principles guide our highly skilled workforce toward BendPak's unified vision.



Including new acquisitions like our latest facility in Mobile, Alabama, BendPak's facilities encompass over 700,000 sq. ft. worldwide. Each location follows strict guidelines as outlined by ISO-9001, further supporting our position as a premier global manufacturer. At BendPak, we ensure that our offshore manufacturing is no different in approach or standards from our domestic production. These facilities are audited year-round and undergo systematic evaluation of documented quality programs such as TUV, ANSI/ALI ALCTV, CSA, UL and AS/NZS 1418.9. The programs are also audited quarterly to ensure continued compliance with all applicable standards.

AMERICA'STM FAVORITE

SINCE 1965



BP BendPak

Ranger

AUTOSTACKER

LITESTIX

GRANDPRIX

COOL BOSS

DANMAR

JACKPAK

QUICKJACK

MAXJAX

1645 Lemonwood Drive • Santa Paula, CA USA 93060
Tel: 1-800-253-2363 • www.bendpak.com