




Featuring an extra-tall design with adjustable height settings.



Achieves a maximum lift height of over 2 meters without the need for additional adapters.

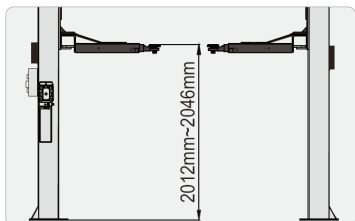

Built with an extended carriage design to enhance structural strength.



Certificate No.: CE-MC-210519-027-31-5A - CCQS Ireland
EN 1493:2010 Vehicle Lifts / EN ISO 12100:2010 / EN 60204-1-2018




Frame Cradle Pads for Trucks & SUVs (optional)



75mm Extension adapters (included)





Screw pad Assembly, 50mm pin (included)

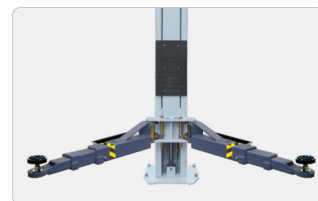

Extra-long, 3-stage lift arms designed to accommodate both small and large vehicles

LiftMotive Europe B.V. - Melkweg 16A, 1841JJ Stompeteren
www.liftmotive.com | info@liftmotive.com | Tel. +31 627365781

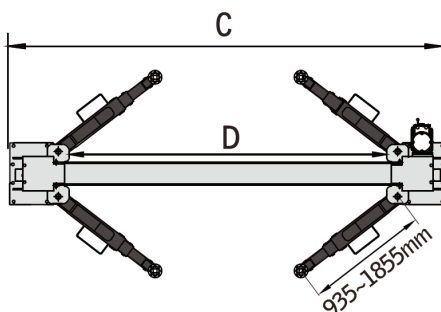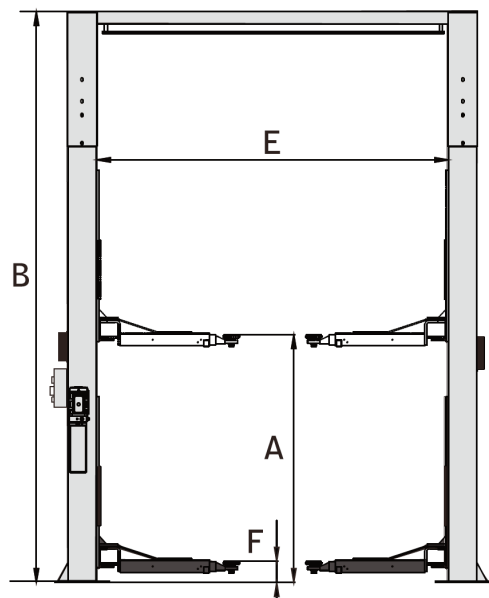

Measurement	Dimension
A - Lift height without extension	2012 - 2046mm
A - Lift Height with extension	2275 - 2275mm
A - Lock height without extension	1972 - 2006mm
A - Lock height with extension	2201 - 2235mm
B - Overall Height (2 options)	4224 / 4502mm
C - Overall Width	3666mm
D - Drive-Thru Clearance	2720mm
E - Width Between the Columns	3000mm
F - Minimum Pad Height	107mm
Arm reach Min / Max	935-1855mm
Voltage / Motor	400V / 3.0HP
Gross Weight	871KG