

Standard configuration includes two adjustable width settings.



Open-top floor plate design accommodates various vehicles, ideal for low-ceiling garages.



Certificate No.: CE-MC-210519-027-32-5A - CCQS Ireland
EN 1493:2010 Vehicle Lifts / EN ISO 12100:2010 / EN 60204-1-2018



75mm & 150mm extensions included.





SUV / Truck Adapters and Screw pads included.



4 three-stage arms giving more flexibility to reach lifting points.



24V electric control system, with single-point lock operation.

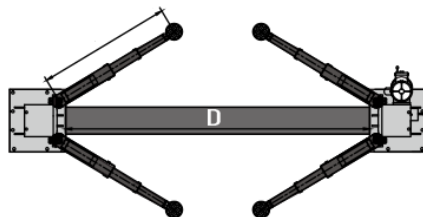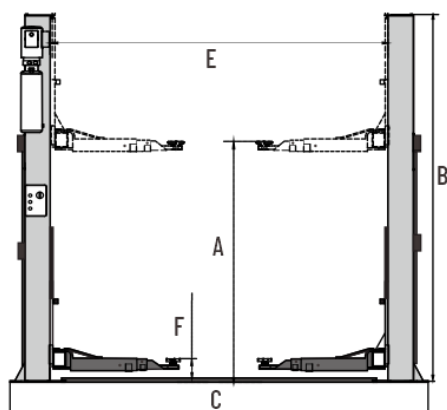

Measurement	Dimension
A - Lift height without extension	1850 - 1884 mm
A - Lift Height with extension	2079 - 2113 mm
A - Lock height without extension	1790 - 1824 mm
A - Lock height with extension	2019 - 2053 mm
B - Overall Height	3110mm
C - Overall Width	3692 / 3829 mm
D - Drive-Thru Clearance	2673 / 2810 mm
E - Width Between the Columns	3000 / 3137 mm
F - Minimum Pad Height	102mm
Arm reach Min / Max	955-1820mm
Voltage / Motor	230V or 400V 3.0HP
Gross Weight	996KG