



Dual Hydraulic chain driven cylinders to increase lift height.



Its open-top design is ideal for lifting taller vehicles and can be installed in low-ceiling workshops.



Certificate No.: CE-MC-210519-027-23-5A - CCQS Ireland
EN 1493:2010 Vehicle Lifts / EN ISO 12100:2010 / EN 60204-1-2018



Screw pads with 75mm extensions included





Automatic arm locks restraints.



4 three-stage arms giving more flexibility to reach lifting points.



24V electric control system, safe and convenient.

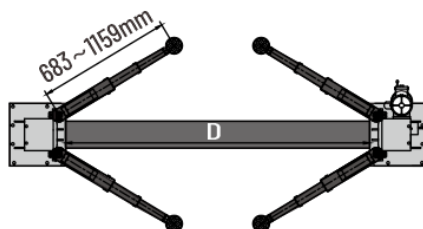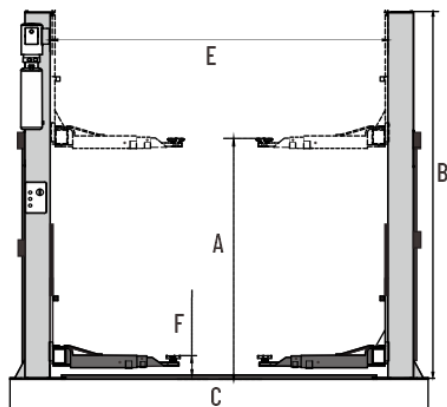

Measurement	Dimension
A - Lift height without extension	1814 - 1846 mm
A - Lift Height with extension	1890 - 1922 mm
A - Lock height without extension	1774 - 1806 mm
A - Lock height with extension	1850 - 1882 mm
B - Overall Height	2724mm
C - Overall Width	3350mm
D - Drive-Thru Clearance	2493mm
E - Width Between the Columns	2770mm
F - Minimum Pad Height	89mm
Arm reach Min / Max	683-1159mm
Voltage / Motor	230V or 400V 3.0HP
Gross Weight	613KG