




Featuring an extra-tall design with adjustable height settings.




Increased surface on the door stop protection to prevent damages when opening a car door.

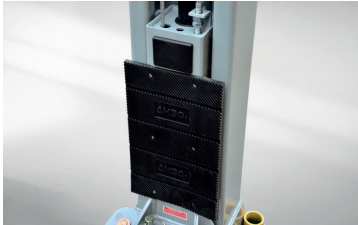

Equipped with a 24V low-voltage safety control system, the lift ensures safer operation and user-friendly handling.



Certificate No.: CE-MC-210519-027-31-5A - CCQS Ireland
EN 1493:2010 Vehicle Lifts / EN ISO 12100:2010 / EN 60204-1-2018



Frame Cradle Pads for Trucks & SUVs (optional)



Optional Height Extension kit:
With this kit the overall height extends to 4431mm




Screw pad Assembly, 50mm pin and 75mm adapters (included)



Super Asymmetric arms allows to load different vehicles in an asymmetric or symmetric configuration.

LiftMotive Europe B.V. - Melkweg 16A, 1841JJ Stompeteren
www.liftmotive.com | info@liftmotive.com | Tel. +31 627365781

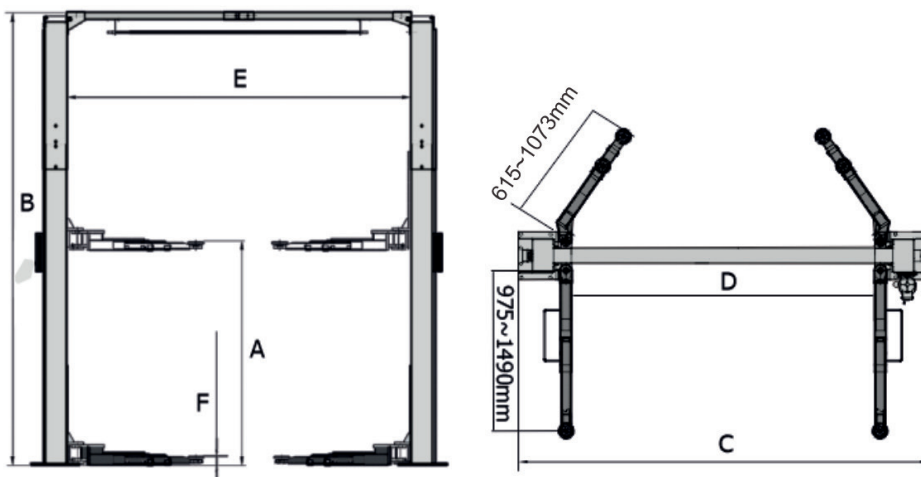

Measurement	Dimension
A - Lift height without extension	1820 - 1868mm
A - Lift Height with extension	1896 - 1944mm
A - Lock height without extension	1773 - 1821 mm
A - Lock height with extension	1849 - 1897mm
B - Overall Height (2 options)	3635 / 3835mm
B - Overall Height (extensionkit)	4431mm
C - Overall Width	3428mm
D - Drive-Thru Clearance	2528mm
E - Width Between the Columns	2850mm
F - Minimum Pad Height	95mm
Front Arm Reach	615-1073mm
Rear Arm Reach	975-1490mm
Voltage / Motor	400V / 3.0HP
Weight	871KG